



NETA Interface Definition and Design: Part 2

Interfaces to other Service Providers

Synopsis	This document contains the definition and design of all interfaces between the BSC Service Systems and other Systems. It includes the specification of file formats and structure of electronic files. Part two only contains details for interfaces which involve BSC Agents and other service providers.
Version	34.01
Effective date	5 November 2015
Prepared by	Design Authority

Intellectual Property Rights, Copyright and Disclaimer

The copyright and other intellectual property rights in this document are vested in ELEXON or appear with the consent of the copyright owner. These materials are made available for you for the purposes of your participation in the electricity industry. If you have an interest in the electricity industry, you may view, download, copy, distribute, modify, transmit, publish, sell or create derivative works (in whatever format) from this document or in other cases use for personal academic or other non-commercial purposes. All copyright and other proprietary notices contained in the document must be retained on any copy you make.

All other rights of the copyright owner not expressly dealt with above are reserved.

No representation, warranty or guarantee is made that the information in this document is accurate or complete. While care is taken in the collection and provision of this information, ELEXON Limited shall not be liable for any errors, omissions, misstatements or mistakes in any information or damages resulting from the use of this information or action taken in reliance on it.

Table Of Contents

1	Introduction	15
1.1	Purpose	15
1.1.1	Summary	15
1.2	Scope	15
1.2.1	The Scope of this Document	15
1.3	Summary	15
1.4	Amendment History	16
1.5	References	16
1.6	Abbreviations	16
2	Common Interface Conventions	18
2.1	Interface Mechanisms	18
2.1.1	Manual	18
2.1.2	Electronic Data File Transfer	18
2.1.3	Internal Interfaces	20
2.1.4	Repeating Structure	20
2.1.5	File names	20
2.1.6	Unstructured File Format	21
2.1.7	Acknowledgement Messages and Sequence Numbers	21
2.1.8	Time	21
2.1.9	Valid Sets	21
3	External Interface Summary	22
3.1	Interfaces by BSC Agent	22
3.1.1	BMRA Interfaces	22
3.1.2	CDCA Interfaces	23
3.1.3	CRA Interfaces	24
3.1.4	ECVAA Interfaces	26
3.1.5	SAA Interfaces	27
3.2	Interfaces by Corresponding Party	29
3.2.1	BSCCo Ltd Interfaces	29
3.2.2	FAA Interfaces	31
3.2.3	System Operator Interfaces	31
3.2.4	Stage 2 Interfaces	32
3.2.5	Transfer Coordinator Interfaces	32
3.2.6	Internal Interfaces	34
3.2.7	EMR Settlement Services Provider Interfaces	34
4	Interfaces From and To Multiple Parties	35
4.1	CRA-I004: (input) BSC Service Agent Details	35

4.2	CRA-I013: (output) Issue Authentication Report	36
4.3	CRA-I015: (output) BM Unit, Interconnector and GSP Group Data	37
4.4	CRA-I020: (output) Operations Registration Report	39
4.5	CRA-I028: (output) NGC Standing Data Report	41
4.6	ECVAA-I016: (output) ECVAA Data Exception Report	42
4.7	ECVAA-I025: (output) Credit Cover Minimum Eligible Amount Report	42
4.8	SAA-I013: (output) Credit/Debit Reports	43
5	Interfaces From and To System Operators	44
5.1	BMRA-I002: (input) Balancing Mechanism Data	44
5.2	BMRA-I003: (input) System Related Data	45
5.3	BMRA-I010: (output, common) Data Exception Reports	46
5.4	BMRA-I014: (input) Price Adjustment Data	47
5.5	BMRA-I020: (input) BM Unit Fuel Type List	48
5.6	BMRA-I021: (input) Temperature Reference Data	48
5.7	BMRA-I022: (input) Daily Energy Volume Reference Data	49
5.8	BMRA-I023: (input) Wind Generation Registered Capacities	49
5.9	CDCA-I012: (output, part 1) Report Raw Meter Data	49
5.10	CDCA-I029: (output, part 1) Aggregated GSP Group Take Volumes	49
5.11	CDCA-I042: (output, part 1) BM Unit Aggregation Report	49
5.12	CDCA-I049: (output) Total Demand per GSP	50
5.13	CDCA-I051: (output) Report Meter Technical Details	50
5.14	CDCA-I067: (input) Disconnected CVA BM Units	50
5.15	CRA-I007: (input/output) Boundary Point and System Connection Point Data	50
5.16	CRA-I008: (input) Interconnector Registration Details	50
5.17	CRA-I013: (output, common) Issue Authentication Report	50
5.18	CRA-I014: (output, part 1) Registration Report	51
5.19	CRA-I020: (output) Operations Registration Report	51
5.20	CRA-I028: (output) NGC Standing Data Report	51
5.21	SAA-I012 (input, part 1) Dispute Notification	51
5.22	SAA-I014 (output) Settlement Report	51
5.23	SAA-I017: (output, common) SAA Data Exception Report	55
5.24	SAA-I018 (output, part 1) Dispute Report	55
5.25	SAA-I026: (input) Price Adjustment Data	56
5.26	SAA-I033: (input) Receive Request for Data Change	57
5.27	BMRA-I024: (input) Large Combustion Plant Directive Spreadsheet	57
5.28	BMRA-I025: (input) SO-SO Prices	58
5.29	BMRA-I026: (input) SO-SO Standing Data	59

5.30	BMRA-I028: (input) Receive REMIT Data	59
5.31	BMRA-I029: (input) Receive Transparency Regulation Data	59
6	Interfaces From and To FAA	61
6.1	CRA-I004: (input, common) BSC Service Agent Details	61
6.2	CRA-I013: (output, common) Issue Authentication Report	61
6.3	CRA-I015: (output, common) BM Unit and Energy Account Registration Data	61
6.4	ECVAA-I006: (input) Credit Limit Data	61
6.5	ECVAA-I016: (output, common) ECVAA Data Exception Report	62
6.6	SAA-I011: (input) Payment Calendar Data	62
6.7	SAA-I013: (output, common) Credit/Debit Reports	62
7	Interfaces From and To BSCCo Ltd	63
7.1	BMRA-I010: (output, common) Data Exception Reports	63
7.2	BMRA-I011: (output) Performance Reports	63
7.3	BMRA-I012: (input) System Parameters	64
7.4	BMRA-I013: (output) BMRA BSC Section D Charging Data	65
7.5	CDCA-I014: (output, part 1) Estimated Data Report	65
7.6	BMRA-I016: (input) Receive Market Index Data Provider Thresholds	66
7.7	BMRA-I017: (output) Report Market Index Data Provider Thresholds	67
7.8	CDCA-I018: (output, part 1) MAR Reconciliation Report	68
7.9	CDCA-I019: (output, part 1) MAR Remedial Action Report	68
7.10	CDCA-I022: (input) Distribution Line Loss Factors	68
7.11	CDCA-I023: (output) Missing Line Loss Factors	69
7.12	CDCA-I032: (output) Data Collection and Aggregation Performance Report	70
7.13	CDCA-I047: (output, part 1) Correspondence Receipt Acknowledgement	71
7.14	CDCA-I061 (input) Receive System Parameters	71
7.15	CDCA-I062: (input) Receive Sample Settlement Periods	71
7.16	CDCA-I064: (output) MOA Proving Tests Report	72
7.17	CDCA-I065: (output) MOA Fault Resolution Report	73
7.18	CRA-I001: (input & output, part 1) BSC Party Registration Data	74
7.19	CRA-I003: (input, part 1) BSC Party Agent Registration Data	74
7.20	CRA-I004: (input, common) BSC Service Agent Details	74
7.21	CRA-I009: (input) Receive Manual Credit Qualifying Flag	74
7.22	CRA-I011: (input) Credit Assessment Load Factors	74
7.23	CRA-I020: (output, common) Operations Registration Report	75
7.24	CRA-I028: (output) NGC Standing Data Report	75
7.25	CRA-I029: (input) Transmission Loss Factors	75
7.26	CRA-I032: (output) CRA Performance Reports	76

7.27	CRA-I034: (input) Flexible Reporting Request	76
7.28	CRA-I035: (output) CRA BSC Section D Charging Data	77
7.29	CRA-I042: (input) Receive Market Index Data Provider Registration Data	77
7.30	CRA-I043: (input) Receive Exempt Export Registration Data	78
7.31	CRA-I044: (input) Withdrawals Checklist Request	79
7.32	CRA-I047: (output) Withdrawals Checklist	79
7.33	ECVAA-I017: (output) ECVAA Performance Report	80
7.34	ECVAA-I021: (output) Credit Limit Warning	81
7.35	ECVAA-I023: (output) ECVAA BSC Section D Charging Data	81
7.36	ECVAA-I026: (output) Minimum Eligible Amount Request	82
7.37	ECVAA-I027: (input) Notification of BSC Parties in Section H Default	82
7.38	ECVAA-I032: (input) Credit Assessment Price	83
7.39	ECVAA-I040: (output) Issue Notification System Status Report	83
7.40	ECVAA-I041: Receive Party Credit Default Authorisation Details	84
7.41	SAA-I010: (input) BSCCo Ltd Cost Data (Redundant)	84
7.42	SAA-I012: (input, part 1) Dispute Notification	85
7.43	SAA-I014 (output) Settlement Reports	85
7.44	SAA-I016: (output, part 1) Settlement Calendar	87
7.45	SAA-I018: (output, part 1) Dispute Report	87
7.46	SAA-I019: (output) BSC Party Performance Reports (Redundant)	87
7.47	SAA-I020: (output) SAA Performance Reports	88
7.48	SAA-I023: (input) System Parameters	89
7.49	SAA-I025: (output) SAA BSC Section D Charging Data	89
7.50	SAA-I027: (output) Report pre-settlement run validation failure	90
7.51	SAA-I028: (input) Receive settlement run decision	90
7.52	SAA-I029: (input) Receive settlement run instructions	91
7.53	SAA-I031: (input) Receive Market Index Data Provider Thresholds	92
7.54	SAA-I032: (output) Report Market Index Data Provider Thresholds	93
7.55	SAA-I034: (output) Report Recommended Data Change	93
7.56	SAA-I035: (input) Receive Instruction for Data Change	94
7.57	SAA-I036: (output) Report Confirmation of Data Change	94
7.58	SAA- I038: (input) Receive Excluded Emergency Acceptance Pricing Information	95
7.59	SAA-I039: (output) Send Excluded Emergency Acceptance Dry Run Results	95
7.60	SAA- I040: (input) Receive Authorisation To Proceed With Full Settlement Run	96
7.61	ECVAA-I049: (input) Request to remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default	96
7.62	ECVAA-I050: (output) Remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default Feedback.	97

7.63	BMRA-I033: (Input) STOR Availability Window	98
7.64	SAA-I046: (Input) STOR Availability Window	99
7.67	SAA-I047 (input) BSCCo Calculated SBR Imbalance Price	100
7.68	SAA-I048 (output) SBR Imbalance Price Discrepancy Notice	101
8	Interfaces From and To Stage 2	102
8.1	CDCA-I043: (output) GSP Group Take to SVAA	102
8.2	CRA-I004: Agent Details	103
8.3	SAA-I007: (input) BM Unit Allocated Demand Volume	103
8.4	SAA-I016: (output, part 1) Settlement Calendar	103
8.5	SAA-I017: (output, common) SAA Data Exception Report	103
8.6	CRA-I015: (output) BM Unit Registration Data	104
8.7	BMRA-I032: (output) Demand Control Instructions to SVAA	104
8.8	SAA-I045: (input) BM Unit Allocated Demand Disconnection Volume	105
9	Interfaces Within BSC Central Systems	106
9.1	BMRA-I001 (input): Registration Data	106
9.2	BMRA-I007 (output) SAA/ECVAA Balancing Mechanism Data	106
9.3	BMRA-I010: (output, common) Data Exception Reports	107
9.4	BMRA-I018: (input) Publish Credit Default Report	107
9.5	CDCA-I002: (input) Registration Data	107
9.6	CDCA-I016: (input) Information from TAA	107
9.7	CDCA-I020: (input) Site Visit Inspection Report	108
9.8	CDCA-I027: (output) Aggregated Interconnector Meter Flow Volumes	108
9.9	CDCA-I028: (output) Aggregated BM Unit Meter Flow Volumes	109
9.10	CDCA-I034: Settlement Calendar	109
9.11	CDCA-I035: (input) Site Visit Report on Aggregation Rule Compliance	109
9.12	CDCA-I036: (output) GSP Group Take to SAA	110
9.13	CDCA-I039: (output) Information to TAA	110
9.14	CDCA-I050: (input) Data Exception Reports	111
9.15	CDCA-I066: (input) Demand Control Instructions to CDCA	111
9.16	CDCA-I068: (output) Period BM Unit Demand Disconnection Volumes	111
9.17	CRA-I010	111
9.18	CRA-I013: (output, common) Issue Authentication Report	111
9.19	CRA-I015: (output, common) BM Unit and Energy Account Registration Data	111
9.20	CRA-I017 (output): Credit Assessment Capability	111
9.21	CRA-I019: (output) Registration Data	113
9.22	CRA-I022: (output) Metering System Details	115
9.23	CRA-I030: (input) Data Exception Reports	115

9.24	CRA-I045: (input) Withdrawing Party Authorisation and Notification Details	115
9.25	CRA-I046: (input) Withdrawing Party Settlement Details	115
9.26	See SAA-I037 in this section.ECVAA-I001 (input): Registration Data	116
9.27	ECVAA-I011: Account Bilateral Contract Volume Report	116
9.28	ECVAA-I012: MVRN Report	117
9.29	ECVAA-I016: (output, common) ECVAA Data Exception Report	117
9.30	ECVAA-I020: (input) Data Exception Reports	117
9.31	ECVAA-I036: (output) Publish Credit Default Report	118
9.32	ECVAA-I047: (output) Withdrawing Party Authorisation and Notification Details	119
9.33	ECVAA-I048 (input) Physical Notification Data	119
9.34	SAA-I013: (output) Credit/Debit	119
9.35	SAA-I001 (input): Registration Data	119
9.36	SAA-I002 (input): Credit Assessment Capability	119
9.37	SAA-I003 (input) SAA Balancing Mechanism Data	119
9.38	SAA-I004: (input) Period Meter Data	120
9.39	SAA-I008: MVRN Report	120
9.40	SAA-I015	120
9.41	SAA-I016: (output, part 1) Settlement Calendar	120
9.42	SAA-I017: (output, common) SAA Data Exception Report	120
9.43	SAA-I037: (output) Withdrawing Party Settlement Details	120
9.44	SAA-I043: (output) Demand Control Instructions to CDCA	121
9.45	SAA-I044: (input) Period BM Unit Demand Disconnection Volumes	121
9.46	CRA-I036: (output) Notification Agent Termination Request	122
9.47	ECVAA-I031: (output) Notification Agent Termination Feedback	122
9.48	ECVAA-I033: (input) Credit/Debit Reports	123
9.49	CDCA-I040: (output) BM Unit 'Credit Cover' Meter Volume Data Report	123
9.50	ECVAA-I015: (input) BM Unit 'Credit Cover' Meter Volume Data	123
9.51	BMRA-I027: (input) Settlement Reports	123
10	Interfaces From and To Transfer Coordinator	124
10.1	CRA-I023: Issue Registration Transfer Report	124
10.2	CRA-I038: Transfer from SMRS information	124
10.3	CRA-I039: Transfer from SMRS report	125
10.4	CRA-I040: Transfer to SMRS information	125
10.5	CRA-I041: Transfer to SMRS report	126
10.6	CDCA-I055: (input)Transfer from SMRS information	126
10.7	CDCA-I056: (output)Transfer from SMRS report	127
10.8	CDCA-I057: (input) Transfer to SMRS information	127

10.9	CDCA-I058: (output) Transfer to SMRS report	127
11	Interfaces From and To EMR Settlement Services Provider	128
11.1	SAA-I042: (output) BM Unit Gross Demand Report	128
1	Introduction	9
1.1	Purpose	9
1.1.1	Summary	9
1.2	Scope	9
1.2.1	The Scope of this Document	9
1.3	Summary	9
1.4	Amendment History	10
1.5	References	10
1.6	Abbreviations	10
2	Common Interface Conventions	11
2.1	Interface Mechanisms	11
2.1.1	Manual	11
2.1.2	Electronic Data File Transfer	11
2.1.3	Internal Interfaces	13
2.1.4	Repeating Structure	13
2.1.5	File names	13
2.1.6	Unstructured File Format	14
2.1.7	Acknowledgement Messages and Sequence Numbers	14
2.1.8	Time	14
2.1.9	Valid Sets	14
3	External Interface Summary	15
3.1	Interfaces by BSC Agent	15
3.1.1	BMRA Interfaces	15
3.1.2	CDCA Interfaces	16
3.1.3	CRA Interfaces	17
3.1.4	ECVAA Interfaces	19
3.1.5	SAA Interfaces	20
3.2	Interfaces by Corresponding Party	22
3.2.1	BSCCo Ltd Interfaces	22
3.2.2	FAA Interfaces	24
3.2.3	System Operator Interfaces	24
3.2.4	Stage 2 Interfaces	25
3.2.5	Transfer Coordinator Interfaces	25
3.2.6	Internal Interfaces	27
3.2.7	EMR Settlement Services Provider Interfaces	27

4	Interfaces From and To Multiple Parties	28
4.1	CRA I004: (input) BSC Service Agent Details	28
4.2	CRA I013: (output) Issue Authentication Report	29
4.3	CRA I015: (output) BM Unit, Interconnector and GSP Group Data	30
4.4	CRA I020: (output) Operations Registration Report	32
4.5	CRA I028: (output) NGC Standing Data Report	34
4.6	ECVAA I016: (output) ECVAA Data Exception Report	35
4.7	ECVAA I025: (output) Credit Cover Minimum Eligible Amount Report	35
4.8	SAA I013: (output) Credit/Debit Reports	36
5	Interfaces From and To System Operators	37
5.1	BMRA I002: (input) Balancing Mechanism Data	37
5.2	BMRA I003: (input) System Related Data	38
5.3	BMRA I010: (output, common) Data Exception Reports	39
5.4	BMRA I014: (input) Price Adjustment Data	40
5.5	BMRA I020: (input) BM Unit Fuel Type List	41
5.6	BMRA I021: (input) Temperature Reference Data	41
5.7	BMRA I022: (input) Daily Energy Volume Reference Data	42
5.8	BMRA I023: (input) Wind Generation Registered Capacities	42
5.9	CDCA I012: (output, part 1) Report Raw Meter Data	42
5.10	CDCA I029: (output, part 1) Aggregated GSP Group Take Volumes	42
5.11	CDCA I042: (output, part 1) BM Unit Aggregation Report	42
5.12	CDCA I049: (output) Total Demand per GSP	43
5.13	CDCA I051: (output) Report Meter Technical Details	43
5.14	CDCA I067: (input) Disconnected CVA BM Units	43
5.15	CRA I007: (input/output) Boundary Point and System Connection Point Data	43
5.16	CRA I008: (input) Interconnector Registration Details	43
5.17	CRA I013: (output, common) Issue Authentication Report	43
5.18	CRA I014: (output, part 1) Registration Report	44
5.19	CRA I020: (output) Operations Registration Report	44
5.20	CRA I028: (output) NGC Standing Data Report	44
5.21	SAA I012 (input, part 1) Dispute Notification	44
5.22	SAA I014 (output) Settlement Report	44
5.23	SAA I017: (output, common) SAA Data Exception Report	48
5.24	SAA I018 (output, part 1) Dispute Report	48
5.25	SAA I026: (input) Price Adjustment Data	49
5.26	SAA I033: (input) Receive Request for Data Change	50
5.27	BMRA I024: (input) Large Combustion Plant Directive Spreadsheet	50

5.28	BMRA I025: (input) SO-SO Prices	51
5.29	BMRA I026: (input) SO-SO Standing Data	52
5.30	BMRA I028: (input) Receive REMIT Data	52
5.31	BMRA I029: (input) Receive Transparency Regulation Data	52
6	Interfaces From and To FAA	54
6.1	CRA I004: (input, common) BSC Service Agent Details	54
6.2	CRA I013: (output, common) Issue Authentication Report	54
6.3	CRA I015: (output, common) BM Unit and Energy Account Registration Data	54
6.4	ECVAA I006: (input) Credit Limit Data	54
6.5	ECVAA I016: (output, common) ECVAA Data Exception Report	55
6.6	SAA I011: (input) Payment Calendar Data	55
6.7	SAA I013: (output, common) Credit/Debit Reports	55
7	Interfaces From and To BSCCo Ltd	56
7.1	BMRA I010: (output, common) Data Exception Reports	56
7.2	BMRA I011: (output) Performance Reports	56
7.3	BMRA I012: (input) System Parameters	57
7.4	BMRA I013: (output) BMRA-BSC Section D Charging Data	58
7.5	CDCA I014: (output, part 1) Estimated Data Report	58
7.6	BMRA I016: (input) Receive Market Index Data Provider Thresholds	59
7.7	BMRA I017: (output) Report Market Index Data Provider Thresholds	60
7.8	CDCA I018: (output, part 1) MAR Reconciliation Report	61
7.9	CDCA I019: (output, part 1) MAR Remedial Action Report	61
7.10	CDCA I022: (input) Distribution Line Loss Factors	61
7.11	CDCA I023: (output) Missing Line Loss Factors	62
7.12	CDCA I032: (output) Data Collection and Aggregation Performance Report	63
7.13	CDCA I047: (output, part 1) Correspondence Receipt Acknowledgement	64
7.14	CDCA I061 (input) Receive System Parameters	64
7.15	CDCA I062: (input) Receive Sample Settlement Periods	64
7.16	CDCA I064: (output) MOA Proving Tests Report	65
7.17	CDCA I065: (output) MOA Fault Resolution Report	66
7.18	CRA I001: (input & output, part 1) BSC Party Registration Data	67
7.19	CRA I003: (input, part 1) BSC Party Agent Registration Data	67
7.20	CRA I004: (input, common) BSC Service Agent Details	67
7.21	CRA I009: (input) Receive Manual Credit Qualifying Flag	67
7.22	CRA I011: (input) CALF	67
7.23	CRA I020: (output, common) Operations Registration Report	68
7.24	CRA I028: (output) NGC Standing Data Report	68

7.25	CRA I029: (input) Transmission Loss Factors	68
7.26	CRA I032: (output) CRA Performance Reports	69
7.27	CRA I034: (input) Flexible Reporting Request	69
7.28	CRA I035: (output) CRA BSC Section D Charging Data	70
7.29	CRA I042: (input) Receive Market Index Data Provider Registration Data	70
7.30	CRA I043: (input) Receive Exempt Export Registration Data	71
7.31	CRA I044: (input) Withdrawals Checklist Request	72
7.32	CRA I047: (output) Withdrawals Checklist	72
7.33	ECVAA I017: (output) ECVAA Performance Report	73
7.34	ECVAA I021: (output) Credit Limit Warning	74
7.35	ECVAA I023: (output) ECVAA BSC Section D Charging Data	74
7.36	ECVAA I026: (output) Minimum Eligible Amount Request	75
7.37	ECVAA I027: (input) Notification of BSC Parties in Section H Default	75
7.38	ECVAA I032: (input) Credit Assessment Price	76
7.39	ECVAA I040: (output) Issue Notification System Status Report	76
7.40	ECVAA I041: Receive Party Credit Default Authorisation Details	77
7.41	SAA I010: (input) BSCCo Ltd Cost Data (Redundant)	77
7.42	SAA I012: (input, part 1) Dispute Notification	78
7.43	SAA I014 (output) Settlement Reports	78
7.44	SAA I016: (output, part 1) Settlement Calendar	80
7.45	SAA I018: (output, part 1) Dispute Report	80
7.46	SAA I019: (output) BSC Party Performance Reports (Redundant)	80
7.47	SAA I020: (output) SAA Performance Reports	81
7.48	SAA I023: (input) System Parameters	82
7.49	SAA I025: (output) SAA BSC Section D Charging Data	82
7.50	SAA I027: (output) Report pre settlement run validation failure	83
7.51	SAA I028: (input) Receive settlement run decision	83
7.52	SAA I029: (input) Receive settlement run instructions	84
7.53	SAA I031: (input) Receive Market Index Data Provider Thresholds	85
7.54	SAA I032: (output) Report Market Index Data Provider Thresholds	86
7.55	SAA I034: (output) Report Recommended Data Change	86
7.56	SAA I035: (input) Receive Instruction for Data Change	87
7.57	SAA I036: (output) Report Confirmation of Data Change	87
7.58	SAA I038: (input) Receive Excluded Emergency Acceptance Pricing Information	88
7.59	SAA I039: (output) Send Excluded Emergency Acceptance Dry Run Results	88
7.60	SAA I040: (input) Receive Authorisation To Proceed With Full Settlement Run	89
7.61	ECVAA I049: (input) Request to remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default	89

7.62	ECVAA I050: (output) Remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default Feedback.	90
7.63	BMRA I033: (Input) STOR Availability Window	91
7.64	SAA I046: (Input) STOR Availability Window	92
7.67	SAA I047 (input) BSCCo Calculated SBR Imbalance Price	93
7.68	SAA I048 (output) SBR Imbalance Price Discrepancy Notice	94
8	Interfaces From and To Stage 2	95
8.1	CDCA I043: (output) GSP Group Take to SVAA	95
8.2	CRA I004: Agent Details	96
8.3	SAA I007: (input) BM Unit Allocated Demand Volume	96
8.4	SAA I016: (output, part 1) Settlement Calendar	96
8.5	SAA I017: (output, common) SAA Data Exception Report	96
8.6	CRA I015: (output) BM Unit Registration Data	97
8.7	BMRA I032: (output) Demand Control Instructions to SVAA	97
8.8	SAA I045: (input) BM Unit Allocated Demand Disconnection Volume	98
9	Interfaces Within BSC Central Systems	99
9.1	BMRA I001 (input): Registration Data	99
9.2	BMRA I007 (output) SAA/ECVAA Balancing Mechanism Data	99
9.3	BMRA I010: (output, common) Data Exception Reports	100
9.4	BMRA I018: (input) Publish Credit Default Report	100
9.5	CDCA I002: (input) Registration Data	100
9.6	CDCA I016: (input) Information from TAA	100
9.7	CDCA I020: (input) Site Visit Inspection Report	101
9.8	CDCA I027: (output) Aggregated Interconnector Meter Flow Volumes	101
9.9	CDCA I028: (output) Aggregated BM Unit Meter Flow Volumes	102
9.10	CDCA I034: Settlement Calendar	102
9.11	CDCA I035: (input) Site Visit Report on Aggregation Rule Compliance	102
9.12	CDCA I036: (output) GSP Group Take to SAA	103
9.13	CDCA I039: (output) Information to TAA	103
9.14	CDCA I050: (input) Data Exception Reports	104
9.15	CDCA I066: (input) Demand Control Instructions to CDCA	104
9.16	CDCA I068: (output) Period BM Unit Demand Disconnection Volumes	104
9.17	CRA I010	104
9.18	CRA I013: (output, common) Issue Authentication Report	104
9.19	CRA I015: (output, common) BM Unit and Energy Account Registration Data	104
9.20	CRA I017 (output): Credit Assessment Capability	104
9.21	CRA I019: (output) Registration Data	106
9.22	CRA I022: (output) Metering System Details	108

9.23	CRA I030: (input) Data Exception Reports	108
9.24	CRA I045: (input) Withdrawing Party Authorisation and Notification Details	108
9.25	CRA I046: (input) Withdrawing Party Settlement Details	108
9.26	See SAA I037 in this section.ECVAA I001 (input): Registration Data	109
9.27	ECVAA I011: Account Bilateral Contract Volume Report	109
9.28	ECVAA I012: MVRN Report	110
9.29	ECVAA I016: (output, common) ECVAA Data Exception Report	110
9.30	ECVAA I020: (input) Data Exception Reports	110
9.31	ECVAA I036: (output) Publish Credit Default Report	111
9.32	ECVAA I047: (output) Withdrawing Party Authorisation and Notification Details	112
9.33	ECVAA I048 (input) Physical Notification Data	112
9.34	SAA I013: (output) Credit/Debit	112
9.35	SAA I001 (input): Registration Data	112
9.36	SAA I002 (input): Credit Assessment Capability	112
9.37	SAA I003 (input) SAA Balancing Mechanism Data	112
9.38	SAA I004: (input) Period Meter Data	113
9.39	SAA I008: MVRN Report	113
9.40	SAA I015	113
9.41	SAA I016: (output, part 1) Settlement Calendar	113
9.42	SAA I017: (output, common) SAA Data Exception Report	113
9.43	SAA I037: (output) Withdrawing Party Settlement Details	113
9.44	SAA I043: (output) Demand Control Instructions to CDCA	114
9.45	SAA I044: (input) Period BM Unit Demand Disconnection Volumes	114
9.46	CRA I036: (output) Notification Agent Termination Request	115
9.47	ECVAA I031: (output) Notification Agent Termination Feedback	115
9.48	ECVAA I033: (input) Credit/Debit Reports	116
9.49	CDCA I040: (output) BM Unit 'Credit Cover' Meter Volume Data Report	116
9.50	ECVAA I015: (input) BM Unit 'Credit Cover' Meter Volume Data	116
9.51	BMRA I027: (input) Settlement Reports	116
10	Interfaces From and To Transfer Coordinator	117
10.1	CRA I023: Issue Registration Transfer Report	117
10.2	CRA I038: Transfer from SMRS information	117
10.3	CRA I039: Transfer from SMRS report	118
10.4	CRA I040: Transfer to SMRS information	118
10.5	CRA I041: Transfer to SMRS report	119
10.6	CDCA I055: (input) Transfer from SMRS information	119
10.7	CDCA I056: (output) Transfer from SMRS report	120

10.8	CDCA I057: (input) Transfer to SMRS information	120
10.9	CDCA I058: (output) Transfer to SMRS report	120
11	Interfaces From and To EMR Settlement Services Provider	121
11.1	SAA I042: (output) BM Unit Gross Demand Report	121

DRAFT

1 Introduction

1.1 Purpose

1.1.1 Summary

This document is Part 2 of the Interface Definition and Design

The scope of the document is, for each BSC Service System provided, the definition and design of all interfaces between the BSC Service System and other Systems.

The scope of Part 2 is limited to the definition and design of all interfaces with the BSC Service System which do not involve BSC Parties and their Agents.

Note that, subsequent to the introduction of P62, any of the following terms can represent a Licensed Distribution System Operator (LDSO) or any Party which distributes electricity.

- Distribution Business
- Distribution System Operator
- Public Distribution System Operator (and abbreviation PDSO)
- Distribution Company
- Public Electricity Suppliers (PES), as operators of a distribution network
- Distributor, as operator of a distribution network.

1.2 Scope

1.2.1 The Scope of this Document

The scope of the BSC Service systems are defined in Part 1 of the Interface Definition and Design.

Interfaces between BSC Service Systems services are termed here **Internal**. They are referenced in the URS documentation as being of equal status to external interfaces but are only indicated in the Interface Definition and Design, as the precise nature of the interface is an implementation decision.

1.3 Summary

Part 2 of the Interface Definition and Design covers interfaces with other BSC Systems, and is organised as follows:

- Section 2 describes common interface conventions, in particular defining the approach to interfacing via file transfer.
- Section 2.1 gives a summary of the interfaces, organised by BSC agent and by corresponding party.

- Sections 4 to 8 and 10 to 11 define the interfaces to each of the corresponding parties.
- Section 9 defines interfaces between the BSC agents.

1.4 Amendment History

Date	Version	Details of Change	Committee Approval Ref
04/11/2010	26.0	Document rebadged and amended for November 2010 Release (P243, P244, CP1333)	
03/11/2011	27.0	November 2011 Release (CP1345, P253)	
28/06/2012	28.0	June 2012 Release (CP1364)	
26/06/2014	29.0	26 June 2014 Release (CP1397)	ISG150/02
01/08/2014	30.0	ORD005 – Electricity Market Reform Directed by the Secretary of State	Directed by the Secretary of State
06/11/2014	31.0	6 November 2014 Release (CP1412)	ISG159/01
16/12/2014	32.0	16 December 2014 Release (P291, P295)	ISG162/01
25/06/2015	33.0	June 2015 Release (CP1435) June 2015 Release (P310 Self-Governance)	ISG168/02 ISG169/05
05/11/2015	34.0	November 2015 Release (P323) November 2015 Release (P305)	P245/06 ISG172/04
	34.1	February 2016 Release (P326)	

1.5 References

[SD]	Draft Service Descriptions for Central Data Collection, Energy Contract Volume Aggregation, Central Registration, Balancing Mechanism Reporting, Settlement Administration,
[BPM]	RETA Business Process Models:
	Top Level Processes
	Central Registration
	Aggregate and Check Contract Volume
	Balancing Mechanism Reporting
	Central Data Collection and Aggregation
	Calculate Settlement Debits and Credits
	Indicative Reporting Requirement
	Entity Relationship Model
[COMMS]	Communications Requirements Document
[NGCSPEC]	NGC Control Technology Specification: NETA BMRA & SAA Interface Specification

1.6 Abbreviations

A list of abbreviations is given in Part 1 of this document.

DRAFT

2 Common Interface Conventions

2.1 Interface Mechanisms

This section outlines the different interface mechanisms used.

2.1.1 Manual

Some interfaces employ a manual mechanism. This means that the information is delivered by mail, by a telephone call, by email, or by fax from one person to another. (Perhaps in an electronic file attached to an email or written to a floppy disc)

All incoming manual flows are required to have been initiated by an Authorised Signatory. The flow will contain the Authorised Signatory Name and Password plus:

- for flows submitted by post or fax, the signatory's signature is required;
- for those flows which are submitted by email, the sending email address must be that registered for the signatory.

Where applicable, the sender will have read the information from a computer screen or printed it out before sending it. Similarly, where applicable, the recipient enters the information into a computer system, probably via a data entry screen-based interface.

More details of the manual mechanism are given where appropriate for a particular flow.

2.1.2 Electronic Data File Transfer

The majority of non-manual interfaces use electronic file transfer. A data file is created on the source system, and is then copied to a predetermined directory on the destination system. The mechanism for the network copy is described in [COMMS].

2.1.2.1 Common File Format

A common format will be used as far as is possible for data files transferred to and from BSC Central Services. This is specified in Section 2.2 of Part 1 of the Interface Definition and Design.

2.1.2.2 NGC File Format

Data received from the System Operator (described in this document as flows BMRA-I002 and BMRA-I003) will be formatted according to the SO's specification for the flows, given in [NGCSPEC]. For the avoidance of doubt, this format is amplified as follows:

1. The first line of the file will contain an asterisk and the file name.

2. The second through fifth lines of the file will start with an asterisk and will be ignored.
3. The last line of the file will begin with the characters '<EOF>'.
4. Lines not beginning with an asterisk or '<EOF>' will contain data records. A data record consists of fields separated by commas as illustrated in Section 14 of [NGCSPEC].
5. A checksum is not included in these files.

The files use the ASCII character set.

In addition, receipt of these files will not be acknowledged by the BSC Central Systems in any way. Files contain sequence numbers - each file type has its own sequence, and duplicate or missing file detection is the same as described in section 2.2 of Part 1, except that instead of sending an out of sequence message, a warning is logged so that the operator can instigate manual processed to resolve the problem.

[NGCSPEC] defines one file which has a different format: the System Warning file, file name SYS_WARN_<CREATION DATE>.bmr. This is a free format text file with no special formats for the first five lines or the last line.

The other exception is the SO-SO Price interface (BMRA-I025). This data is provided as an XML file, in a format defined by the XML Schema for Merit Order List documents (published in the ENTSO-E Reserve Resource Planning EDI library).

All other interfaces with the System Operators will use the common conventions specified in Section 2.2 of Part 1 of the Interface Definition and Design.

NOTE: following implementation of the new Electricity Balancing System (currently scheduled for 2013), we plan to begin migrating all interfaces with the System Operator from CSV to XML. Our intention (subject to confirmation when assessing the relevant Modification Proposals or Change Proposals) is that all new or amended files provided by the System Operator, whether in relation to BMRA-I002, BMRA-I003 or any other relevant interface requirement, will make use of an XML format. The details of this format will be agreed with the System Operator closer to the time, and will then be defined in [NGCSPEC].

2.1.2.3 Pool Transfer File Format

The interfaces with Stage 2 (described in section 8 of this document as flows CDCA-I043, SAA-I007 and CRA-I015) will use Pool Transfer File Format (PTFF) as defined in the SVA Data Catalogue.

The files use the ASCII character set.

The PTFF header and footer records are described in the SVA Data Catalogue. The specific information needed to populate the header record for each flow is given in section 8.

Response messages are sent in response to these flows. These response messages are P0183001 PTFF files as specified in the SVA Data Catalogue.

2.1.2.4 Interfaces to EMR

The BM Unit Gross Demand Report (SAA-I042) is sent to a CFD Settlement Services Provider in XML format, as described in section 11.

2.1.3 Internal Interfaces

Interfaces between BSC Agent services are only indicated in the Interface Definition and Design, as the precise nature of the interface is an implementation decision. As part of the current architecture these internal interfaces are of two kinds:

- via shared database – between CRA, SAA and CDCA
- electronic data file transfer – between these and ECVAA and BMRA.

2.1.4 Repeating Structure

The structure of records and their nesting rules are specified using tables. The tables are defined in a spreadsheet attached to the end of the document.. The meaning of data in those tables is explained in section 2.2.4 of Part I.

2.1.4.1 The Tabs of the Spreadsheet

There is one tab corresponding to the each of the sections of this document: *Multiple, SO, BSCCo Ltd, FAA, Stage 2, Internal*. The *NGC* tab shows the structure of the files sent from the System Operator to BMRA and SAA (this information is mastered in [NGCSPEC]). The *Items* tab is the master definition of each item; the item definitions in the *CRA, ECVAA, CDCA* and *SAA* tabs are copied from there. Note that the *NGC* tab uses different data types: standard Oracle types are used, except for datetime which is defined as “YYYYMMDDHHMM”.

2.1.5 File names

The names of the files received from the System Operator are given in [NGCSPEC]. The names of the files received from and sent to SVAA follow the following convention:

character 1: Sender role code (Pool format)

characters 2-5: Sender participant Id (Pool format)

characters 6-14: Unique identifier.

The names of all other files follow the convention given in section 2.2.5 of Part 1.

2.1.6 Unstructured File Format

With the exception of files from the System Operator and files to and from SVAA, the unstructured file format defined in section 2.2.6 of Part I is available.

2.1.7 Acknowledgement Messages and Sequence Numbers

Section 2.2.7, Acknowledgement Messages, of Part I applies to all files except those from the System Operator.

With the exception of files from the System Operator and files to and from Stage 2, section 2.2.8, Use Of Sequence Numbers, of Part 1, applies. Sequence numbers within NGC files are described in 2.1.2.2, NGC File Format.

2.1.8 Time

All times contained in files will be in GMT; however note that the Settlement Calendar uses local time, and hence Settlement Periods are numbered starting at midnight local time.

2.1.9 Valid Sets

This section defines the domains referred to in the repeating structure tables.

2.1.9.1 Activity

See Part 1, section 2.2.11.1

2.1.9.2 BMRA Exception Type

One of the values:

‘B’ (Balancing Mechanism Data Incomplete)

‘T’ (Termination or general input file validation error)

2.1.9.3 BM Unit Type

See Part 1, section 2.2.11.2

2.1.9.4 Charge Type

One of the values:

‘A’ (Administration Charge)

‘E’ (Energy Imbalance Cashflows)

‘I’ (Information Imbalance Charges)

‘N’ (Non-delivery Charge)

‘R’ (Residual Cashflow Reallocations)

‘B’ (BM Payments)

‘S’ (System Operator Charges)

2.1.9.5 Organisation Type

See Part 1, section 2.2.11.9

2.1.9.6 Run Type

See Part 1, section 2.2.11.13

3 External Interface Summary

This section provides convenient summary lists of the interfaces by system / party. Note that this section defines the default rules for distribution of reports: copies of other reports may be requested through BSCCo Ltd. using the Flexible Reporting procedure.

3.1 Interfaces by BSC Agent

The interfaces to each Agent are listed in the following tables. Interfaces which are defined in Part 1 are not included in these tables.

3.1.1 BMRA Interfaces

Agent-id	Name	Dir'n	User	Type
BMRA-I002	Balancing Mechanism Data	from	SO	Electronic data file transfer, NGC File Format
BMRA-I003	System Related Data	from	SO	Electronic data file transfer, NGC File Format
BMRA-I007	SAA/ECVAA Balancing Mechanism Data	to	SAA (I003) ECVAA (I048)	Electronic data file transfer
BMRA-I011	Performance Reports	to	BSCCo Ltd	Manual
BMRA-I012	System Parameters	from	BSCCo Ltd	Manual
BMRA-I013	BMRA BSC Section D Charging Data	to	BSCCo Ltd	Manual
BMRA-I014	Price Adjustment Data	from	SO	Automatic
BMRA-I016	Receive Market Index Data Provider Thresholds	from	BSCCo Ltd	Manual
BMRA-I017	Report Market Index Data Provider Thresholds	To	BSCCo Ltd	Manual
BMRA-I018	Publish Credit Default Notices	from	ECVAA (I036)	Electronic data file transfer
BMRA-I020	BM Unit Fuel Type List	from	SO	Manual
BMRA-I021	Temperature Reference Data	from	SO	Manual
BMRA-I022	Daily Energy Volume Reference Data	from	SO	Manual
BMRA-I023	Wind Generation Registered Capacities	from	SO	Manual
BMRA-I024 ¹	Large Combustion Plant Directive Spreadsheet	from	BSCCo Ltd	Manual

¹ P226

BMRA-I025	SO-SO Prices	from	SO	Automatic
BMRA-I026	SO-SO Standing Data	from	SO	Manual
BMRA-I027	Settlement Report	from	SAA (I014)	Electronic data file transfer
BMRA-I028	Receive REMIT Data	From	SO	Electronic data file transfer
BMRA-I029	Receive Transparency Data	From	SO	Electronic data file transfer
BMRA-I032	Demand Control Instructions to SVAA	To	SVAA	Electronic data file transfer
BMRA-I033	STOR Availability Window	From	BSCCo	Manual

3.1.2 CDCA Interfaces

Agent-id	Name	Dir'n	User	Type
CDCA-I016	Metering System Details Request	from	TAA	Manual
CDCA-I020	Site Visit Inspection Report	from	CDCA Site Visit Agent	Manual
CDCA-I022	Distribution Line Loss Factors	From	BSCCo Ltd	Electronic data file transfer
CDCA-I023	Missing Line Loss Factors	To	BSCCo Ltd	Manual
CDCA-I027	Aggregated Interconnector Meter Flow Volumes	to	SAA (I004)	via shared database
CDCA-I028	Aggregated BM Unit Metered Volumes	to	SAA (I004)	via shared database
CDCA-I032	Data Collection and Aggregation Performance Report	to	BSCCo Ltd	Manual
CDCA-I035	Site Visit Report on Aggregation Rule compliance	from	CDCA Site Visit Agent	Manual
CDCA-I036	GSP Group Take to SAA	to	SAA (I004)	via shared database
CDCA-I039	Exchange of information with TAA	to	TAA	Manual
CDCA-I040 ²	BM Unit 'Credit Cover' Meter Volume Data Report	To	ECVAA (I015)	Electronic data file transfer
CDCA-I043	GSP Group Take to SVAA	to	SVAA	Electronic data file transfer, Pool Transfer File Format
CDCA-I049	Total Demand per GSP	to	SO	Electronic data file transfer
CDCA-I051	Report Meter Technical Details	to	SO	Manual
CDCA-I055	Transfer from SMRS information	from	Transfer Coordinator	Manual
CDCA-I056	Transfer from SMRS report	to	Transfer Coordinator	Manual
CDCA-I057	Transfer to SMRS information	from	Transfer Coordinator	Manual
CDCA-I058	Transfer to SMRS report	to	Transfer Coordinator	Manual
CDCA-I061	Receive System Parameters	From	BSCCo Ltd	Manual
CDCA-I062 ³	Receive Sample Settlement Periods	from	BSCCo Ltd	Manual
CDCA-I064	MOA Proving Tests Report	To	BSCCo Ltd	Manual
CDCA-I065	MOA Fault Resolution Report	To	BSCCo Ltd	Manual
CDCA-I066	Demand Control Instructions to CDCA	From	SAA	Via shared database
CDCA-I067	Disconnected CVA BM Units	From	SO, Distribution Business	Manual
CDCA-I068	Aggregated BM Unit Disconnection Volumes	To	SAA	Via shared database

² P215

³ This flow was added for the Introduction of Zonal Transmission Losses on an Average Basis (P82), but will not be used.

3.1.3 CRA Interfaces

Agent-id	Name	Dir'n	User	Type
CRA-I001	BSC Party Registration Data	From	BSCCo Ltd	Manual
CRA-I004	BSC Service Agent Details	from	BSCCo Ltd	Manual
CRA-I004	BSC Service Agent Details	from	BSC Service Agents	Manual
CRA-I004	BSC Service Agent Details	from	FAA	Manual
CRA-I004	BSC Service Agent Details	from	SVAA	Manual
CRA-I007	Boundary Point and System Connection Point Registration Data	from	SO	Manual
CRA-I007	Boundary Point and System Connection Point Registration Data	To	BSCCo Ltd	Manual
CRA-I011	CALF	from	BSCCo Ltd	Manual
CRA-I013	Issue Authentication Report	to	BMRA (I001)	Electronic data file transfer
CRA-I013	Issue Authentication Report	to	ECVAA (I001)	Electronic data file transfer
CRA-I013	Issue Authentication Report	to	SAA (I001)	Via shared database
CRA-I013	Issue Authentication Report	to	FAA	Electronic data file transfer
CRA-I013	Issue Authentication Report	to	SO	Electronic data file transfer
CRA-I013	Issue Authentication Report	to	BSCCo Ltd	Electronic data file transfer
CRA-I014	Registration Report	to	BSCCo Ltd	Manual
CRA-I015	BM Unit and Energy Account Registration Data	to	BMRA (I001)	Electronic data file transfer
CRA-I015	BM Unit and Energy Account Registration Data	to	ECVAA (I001)	Electronic data file transfer
CRA-I015	BM Unit and Energy Account Registration Data	to	SAA (I001)	Via shared database
CRA-I015	BM Unit and Energy Account Registration Data	to	SVAA	Electronic data file transfer
CRA-I015	BM Unit and Energy Account Registration Data	to	FAA	Electronic data file transfer
CRA-I017	Credit Assessment Export Capability	to	ECVAA (I001)	Electronic data file transfer
CRA-I017	Credit Assessment Export Capability	to	SAA (I002)	Via shared database
CRA-I019	Registration Data	to	CDCA (I002)	Via shared database
CRA-I020	Operations Registration Report	to	BSCCo Ltd	Electronic data file transfer
CRA-I020	Operations Registration Report	to	SO	Electronic data file transfer
CRA-I022	Metering System Details	to	TAA (I015)	Manual
CRA-I023	Issue Registration Transfer Report	to	Transfer Coordinator	Manual
CRA-I028	NGC Standing Data Report	to	BSCCo Ltd	Electronic data file transfer
CRA-I028	NGC Standing Data Report	to	SO	Electronic data file transfer
CRA-I029	Transmission Loss Factors	from	BSCCo Ltd	Manual
CRA-I032	CRA Performance Reports	to	BSCCo Ltd	Manual
CRA-I034	Flexible Reporting Request	from	BSCCo Ltd	Manual
CRA-I034	Flexible Reporting Request	from	BSC Service Agent	Manual

Agent-id	Name	Dir'n	User	Type
CRA-I034	Flexible Reporting Request	from	SO	Manual
CRA-I035	CRA BSC Section D Charging Data	to	BSCCo Ltd	Electronic data file transfer
CRA-I036	Notification Agent Termination Request	To	ECVAA (I030)	Manual
CRA-I037	Notification Agent Termination Feedback	From	ECVAA (I031)	Manual
CRA-I038	Transfer from SMRS information	from	Transfer Coordinator	Manual
CRA-I039	Transfer from SMRS report	to	Transfer Coordinator	Manual
CRA-I040	Transfer to SMRS information	from	Transfer Coordinator	Manual
CRA-I041	Transfer to SMRS report	to	Transfer Coordinator	Manual
CRA-I042	Receive Market Index Data Provider Registration Data	From	BSCCo Ltd	Manual
CRA-I043	Receive Exempt Export Registration Data	From	BSCCo Ltd	Manual
CRA-I044	Withdrawals Checklist Request	from	BSCCo Ltd	Manual
CRA-I045	Withdrawing Party Authorisation and Notification Details	from	ECVAA (I047)	Manual
CRA-I046	Withdrawing Party Settlement Details	from	SAA (I037)	Via shared database
CRA-I047	Withdrawals Checklist	to	BSCCo Ltd	Manual

DRAFT

3.1.4 ECVAA Interfaces

Agent-id	Name	Dir'n	User	Type
ECVAA-I006	Credit Limit Data	from	FAA	Electronic data file transfer
ECVAA-I011	Account bilateral Contract Volume Report	to	SAA (I008)	Electronic data file transfer
ECVAA-I012	MVR Notification Report	to	SAA (I008)	Electronic data file transfer
ECVAA-I015 ⁴	Receive BM Unit Credit Cover Meter Volume Data	From	CDCA (I040)	Electronic data file transfer
ECVAA-I016	ECVAA Data Exception Report	to	CRA (I030)	Electronic data file transfer
ECVAA-I016	ECVAA Data Exception Report	to	FAA	Electronic data file transfer
ECVAA-I017	ECVAA Performance Report	to	BSCCo Ltd	Manual
ECVAA-I021	Credit Limit Warning	to	BSCCo Ltd	Manual
ECVAA-I023	ECVAA BSC Section D Charging Data	to	BSCCo Ltd	Electronic data file transfer
ECVAA-I025	Credit Cover Minimum Eligible Amount Report	to	BSCCo Ltd	Manual
ECVAA-I025	Credit Cover Minimum Eligible Amount Report	to	FAA	Manual
ECVAA-I026	Minimum Eligible Amount Request	to	BSCCo Ltd	Manual
ECVAA-I027	Notification of BSC Parties in Section H Default	from	BSCCo Ltd	Manual
ECVAA-I030	Notification Agent Termination Request	from	CRA (I036)	Manual
ECVAA-I031	Notification Agent Termination Feedback	To	CRA (I037)	Manual
ECVAA-I032	Credit Assessment Price	from	BSCCo Ltd	Manual
ECVAA-I033	Credit/Debit Reports	from	SAA (I013)	Electronic data file transfer
ECVAA-I036	Publish Credit Default Notices	to	BMRA (I018)	Electronic data file transfer
ECVAA-I040	Issue Notification System Status Report	to	BSCCo Ltd	Manual
ECVAA-I041	Party Credit Default Authorisation Details	from	BSCCo Ltd	Manual
ECVAA-I047	Withdrawing Party Authorisation and Notification Details	to	CRA (I045)	Manual
ECVAA-I048	Physical Notification Data	from	BMRA (I007)	Electronic data file transfer
ECVAA-I049	Request to remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default	from	BSCCo Ltd	Manual
ECVAA-I050	Remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default Feedback	to	BSCCo Ltd	Manual

⁴ P215

3.1.5 SAA Interfaces

Agent-id	Name	Dir'n	User	Type
SAA-I003	Balancing Mechanism Data	from	BMRA	Electronic data file transfer
SAA-I007	BM Unit Allocated Demand Volume	from	SVAA	Electronic data file transfer, Pool Transfer File Format
SAA-I010	BSCCo Ltd Costs (Redundant)	from	BSCCo Ltd	Electronic data file transfer
SAA-I011	Payment Calendar Data	from	FAA	Manual
SAA-I013	Credit/Debit Reports	to	FAA	Electronic data file transfer
SAA-I013	Credit/Debit Reports	to	ECVAA (I033)	Electronic data file transfer
SAA-I014	Settlement Report	to	SO	Electronic data file transfer
SAA-I014	Settlement Report	to	BSCCo Ltd	Electronic data file transfer
SAA-I014	Settlement Report	to	BMRA (I027)	Electronic data file transfer
SAA-I014	Settlement Report	to	EMR Settlement Services Provider	Electronic data file transfer
SAA-I016	Settlement Calendar	to	CDCA (I016)	Via shared database
SAA-I019	BSC Party Performance Reports (Redundant)	to	BSCCo Ltd	Electronic data file transfer
SAA-I020	SAA Performance Reports	to	BSCCo Ltd	Manual
SAA-I023	System Parameters	from	BSCCo Ltd	Manual
SAA-I025	SAA BSC Section D Charging Data	to	BSCCo Ltd	Electronic data file transfer
SAA-I026	Price Adjustment Data	from	SO	Automatic
SAA-I027	Report pre-settlement run validation failure	to	BCCCo Ltd	Manual
SAA-I028	Receive settlement run decision	from	BSCCo Ltd	Manual
SAA-I029	Receive settlement run instructions	from	BSCCo Ltd	Manual
SAA-I031	Receive Market Index Data Provider Thresholds	From	BSCCo Ltd	Manual
SAA-I032	Report Market Index Data Provider Thresholds	to	BSCCo Ltd	Manual
SAA-I033	Receive Request for Data Change	from	SO	Manual
SAA-I034	Report Recommended Data Change	to	BSCCo Ltd	Manual
SAA-I035	Receive Instruction for Data Change	from	BSCCo Ltd	Manual
SAA-I036	Report Confirmation of Data Change	to	BSCCo Ltd	Manual
SAA-I037	Withdrawing Party Settlement Details	to	CRA (I046)	Manual
SAA-I038	Excluded Emergency Acceptance Pricing Information	from	BSCCo Ltd	Manual
SAA-I039	Send Excluded Emergency Acceptance Dry Run Results	to	BSCCo Ltd	Manual
SAA-I040	Receive Authorisation To Proceed With Full Settlement Run	from	BSCCo Ltd	Manual

Agent-id	Name	Dir'n	User	Type
SAA-I041	BM Unit SVA Gross Demand Data File	from	SVAA	Electronic data file transfer, Pool Transfer File Format
SAA-I042	BM Unit Gross Demand Report	to	CFD Settlement Services Provider	Electronic data file transfer, XML
SAA-I043	Demand Control Instructions to CDCA	to	CDCA	Via shared database
SAA-I044	Period BM Unit Demand Disconnection Volumes	from	CDCA	Via shared database
SAA-I045	BM Unit Allocated Disconnection Demand Volume	from	SVAA	Electronic data file transfer, Pool Transfer File Format
SAA-I046	STOR Availability Window	From	BSCCo	Manual

DRAFT

3.2 Interfaces by Corresponding Party

The interfaces to each corresponding party are listed in the following tables. Interfaces which are defined in Part 1 **are** included in these tables, in italic font.

3.2.1 BSCCo Ltd Interfaces

Dir'n	User	Agent-id	Name	Type
To	SO	<i>BMRA-I010</i>	<i>Data Exception Reports</i>	<i>Electronic data file transfer</i>
To	BSCCo Ltd	BMRA-I011	Performance Reports	Manual
from	BSCCo Ltd	BMRA-I012	System Parameters	Manual
To	BSCCo Ltd	BMRA-I013	BMRA BSC Section D Charging Data	Manual
to	<i>BSCCo Ltd</i>	<i>CDCA-I014</i>	<i>Estimated Data Report (Part 1)</i>	<i>Electronic data file transfer</i>
from	BSCCo Ltd	BMRA-I016	Receive Market Index Data Provider Thresholds	Manual
To	BSCCo Ltd	BMRA-I017	Report Market Index Data Provider Thresholds	Manual
from	BSCCo Ltd	BMRA-I024	Large Combustion Plant Directive Spreadsheet ⁵	Manual
to	<i>BSCCo Ltd</i>	<i>CDCA-I018</i>	<i>MAR Reconciliation Report (Part 1)</i>	<i>Manual</i>
to	<i>BSCCo Ltd</i>	<i>CDCA-I019</i>	<i>MAR Remedial Action Report (Part 1)</i>	<i>Manual</i>
from	BSCCo Ltd	CDCA-I022	Distribution Line Loss Factors	Electronic data file transfer
To	BSCCo Ltd	CDCA-I023	Missing Line Loss Factors	Manual
To	BSCCo Ltd	CDCA-I032	Data Collection and Aggregation Performance Report	Manual
from	BSCCo Ltd	CDCA-I043	Receive Exempt Export Registration Data	Manual
To	<i>BSCCo Ltd</i>	<i>CDCA-I047</i>	<i>Correspondence Receipt Acknowledgement (Part 1)</i>	<i>Manual</i>
from	BSCCo Ltd	CDCA-I061	Receive System Parameters	Manual
From	BSCCo Ltd	CDCA-I062	Receive Sample Settlement Periods ⁶	Manual
from	<i>BSCCo Ltd</i>	<i>CRA-I001</i>	<i>BSC Party Registration Data (Part 1)</i>	<i>Manual</i>
to	BSCCo Ltd	CDCA-I064	MOA Proving Tests Report	Manual
to	BSCCo Ltd	CDCA-I065	MOA Fault Resolution Report	Manual
to	<i>BSCCo Ltd</i>	<i>CRA-I001</i>	<i>BSC Party Registration Data (Part 1)</i>	<i>Manual</i>
from	<i>BSCCo Ltd</i>	<i>CRA-I003</i>	<i>BSC Party Agent Registration Data (Part 1)</i>	<i>Manual</i>
from	BSCCo Ltd	CRA-I004	BSC Service Agent Details	Manual
To	<i>BSCCo Ltd</i>	<i>CRA-I007</i>	<i>Boundary Point and System Connection Point Registration Data (Part 1)</i>	<i>Manual</i>
from	BSCCo Ltd	CRA-I011	CALF	Manual
to	BSCCo Ltd	CRA-I013	Issue Authentication Report	Electronic data file transfer
to	<i>BSCCo Ltd</i>	<i>CRA-I014</i>	<i>Registration Report</i>	<i>Manual</i>
to	BSCCo Ltd	CRA-I020	Operations Registration Report	Electronic data file transfer
to	BSCCo Ltd	CRA-I028	NGC Standing Data Report	Electronic data file transfer
from	BSCCo Ltd	CRA-I029	Transmission Loss Factors	Manual
to	BSCCo Ltd	CRA-I032	CRA Performance Reports	Manual
from	BSCCo Ltd	CRA-I034	Flexible Reporting Request	Manual
to	BSCCo Ltd	CRA-I035	CRA BSC Section D Charging Data	Electronic data file transfer
from	BSCCo Ltd	CRA-I042	Market Index Data Provider Registration Data	Manual
from	BSCCo Ltd	CRA-I044	Withdrawals Checklist Request	Manual

⁵ P226

⁶ This flow was added for the Introduction of Zonal Transmission Losses on an Average Basis (P82), but will not be used.

Dir'n	User	Agent-id	Name	Type
to	BSCCo Ltd	CRA-I047	Withdrawals Checklist	Manual
to	BSCCo Ltd	ECVAA-I017	ECVAA Performance Report	Manual
to	BSCCo Ltd	ECVAA-I021	Credit Limit Warning	Manual
to	BSCCo Ltd	ECVAA-I023	ECVAA BSC Section D Charging Data	Electronic data file transfer
to	BSCCo Ltd	ECVAA-I025	Credit Cover Minimum Eligible Amount Report	Manual
to	BSCCo Ltd	ECVAA-I026	Minimum Eligible Amount Request	Manual
from	BSCCo Ltd	ECVAA-I027	Notification of BSC Parties in Section H Default	Manual
from	BSCCo Ltd	ECVAA-I032	Credit Assessment Price	Manual
to	BSCCo Ltd	ECVAA-I040	Issue Notification System Status Report	Manual
from	BSCCo Ltd	ECVAA-I041	Party Credit Default Authorisation Details	Manual
from	BSCCo Ltd	ECVAA-I049	Request to remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default	Manual
to	BSCCo Ltd	ECVAA-I050	Remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default Feedback	Manual
from	BSCCo Ltd	SAA-I010	BSCCo Ltd Costs (Redundant)	Electronic data file transfer
from	BSCCo Ltd	SAA-I012	Dispute Notification (Part 1)	Manual
to	BSCCo Ltd	SAA-I014	Settlement Report	Electronic data file transfer
To	BSCCo Ltd	SAA-I016	Settlement Calendar (Part 1)	Manual
to	BSCCo Ltd	SAA-I018	Dispute Report (Part 1)	Manual
to	BSCCo Ltd	SAA-I019	BSC Party Performance Reports (Redundant)	Electronic data file transfer
to	BSCCo Ltd	SAA-I020	SAA Performance Reports	Manual
from	BSCCo Ltd	SAA-I023	System Parameters	Manual
To	BSCCo Ltd	SAA-I025	SAA BSC Section D Charging Data	Electronic data file transfer
To	BSCCo Ltd	SAA-I02	Report pre-settlement run validation failure	Manual
From	BSCCo Ltd	SAA-I028	Receive settlement run decision	Manual
From	BSCCo Ltd	SAA-I029	Receive settlement run instructions	Manual
from	BSCCo Ltd	SAA-I031	Receive Market Index Data Provider Thresholds	Manual
to	BSCCo Ltd	SAA-I032	Report Market Index Data Provider Thresholds	Manual
to	BSCCo Ltd	SAA-I034	Report Recommended Data Change	Manual
from	BSCCo Ltd	SAA-I035	Receive Instruction for Data Change	Manual
to	BSCCo Ltd	SAA-I036	Report Confirmation of Data Change	Manual
from	BSCCo Ltd	SAA-I038	Excluded Emergency Acceptance Pricing Information	Manual
to	BSCCo Ltd	SAA-I039	Send Excluded Emergency Acceptance Dry Run Results	Manual
from	BSCCo Ltd	SAA-I040	Receive Authorisation To Proceed With Full Settlement Run	Manual
from	BSCCo Ltd	BMRA-I033	STOR Availability Window	Manual
from	BSCCo Ltd	SAA-I046	STOR Availability Window	Manual

3.2.2 FAA Interfaces

Dir'n	User	Agent-id	Name	Type
from	FAA	CRA-I004	BSC Service Agent Details	Manual
to	FAA	CRA-I013	Issue Authentication Report	Electronic data file transfer
to	FAA	CRA-I015	BM Unit and Energy Account Registration Data	Electronic data file transfer
from	FAA	CRA-I034	Flexible Reporting Request	Manual
from	FAA	ECVAA-I006	Credit Limit Data	Electronic data file transfer
to	FAA	ECVAA-I016	ECVAA Data Exception Report	Electronic data file transfer
to	FAA	ECVAA-I025	Credit Cover Minimum Eligible Amount Report	Manual
from	FAA	SAA-I011	Payment Calendar Data	Manual
to	FAA	SAA-I013	Credit/Debit Reports	Electronic data file transfer

3.2.3 System Operator Interfaces

Dir'n	User	Agent-id	Name	Type
from	SO	BMRA-I002	Balancing Mechanism Data	Electronic data file transfer, NGC File Format
from	SO	BMRA-I003	System Related Data	Electronic data file transfer, NGC File Format
to	SO	BMRA-I010	Data Exception Reports	Electronic data file transfer
from	SO	BMRA-I014	Price Adjustment Data	Automatic
from	SO	BMRA-I020	BM Unit Fuel Type List	Manual
from	SO	BMRA-I021	Temperature Reference Data	Manual
from	SO	BMRA-I022	Daily Energy Volume Reference Data	Manual
from	SO	BMRA-I023	Wind Generation Registered Capacities	Manual
from	SO	BMRA-I025	SO-SO Prices	Automatic
from	SO	BMRA-I026	SO-SO Standing Data	Manual
to	SO	CDCA-I012	Report Raw Meter Data (Part 1)	Electronic Data File Transfer
to	SO	CDCA-I014	Estimated Data Report (Part 1)	Electronic data file transfer
to	SO	CDCA-I029	Aggregated GSP Group Take Volumes (Part 1)	Electronic Data File Transfer
to	SO	CDCA-I042	BM Unit Aggregation Report (Part 1)	Electronic Data File Transfer
to	SO	CDCA-I049	Total Demand Per GSP	Electronic data file transfer
to	SO	CDCA-I051	Report Meter Technical Details	Manual
from	SO	CRA-I007	Boundary Point and System Connection Point Registration Data	Manual

Dir'n	User	Agent-id	Name	Type
from	SO	CRA-I008	Interconnector Registration Details	Manual
to	SO	CRA-I013	Issue Authentication Report	Electronic data file transfer
to	SO	CRA-I014	Registration Report (Part 1)	Electronic Data File Transfer
to	SO	CRA-I020	Operations Registration Report	Electronic data file transfer
to	SO	CRA-I028	NGC Standing Data Report	Electronic data file transfer
from	SO	CRA-I034	Flexible Reporting Request	Manual
from	SO	SAA-I012	Dispute Notification (Part 1)	Manual
to	SO	SAA-I014	Settlement Report	Electronic data file transfer
to	SO	SAA-I017	SAA Data Exception Report (Part 1)	Electronic data file transfer
to	SO	SAA-I018	Dispute Report (Part 1)	Manual
from	SO	SAA-I026	Price Adjustment Data	Automatic
from	SO	SAA-I033	Receive Request for Data Change	Manual
to	SO	SAA-I036	Report Confirmation of Data Change	Manual
from	SO	BMRA-I028	Receive REMIT Data	Electronic data file transfer
from	SO	BMRA-I029	Receive Transparency Data	Electronic data file transfer

3.2.4 Stage 2 Interfaces

Dir'n	User	Agent-id	Name	Type
to	SVAA	CDCA-I043	GSP Group Take to SVAA	Electronic data file transfer, Pool Transfer File Format
from	SVAA	CRA-I004	Agent Details	Manual
from	SVAA	CRA-I034	Flexible Reporting Request	Manual
to	MDDA	CRA-I015	BM Unit Registration Details	Electronic data file transfer, Pool Transfer File Format
from	SVAA	SAA-I007	BM Unit Allocated Demand Volume	Electronic data file transfer, Pool Transfer File Format
to	SVAA	SAA-I016	Settlement Calendar (Part 1)	Manual
to	SVAA	SAA-I017	SAA Data Exception Report (Part 1)	Manual
from	SVAA	SAA-I041	BM Unit SVA Gross Demand Data File	Electronic data file transfer, Pool Transfer File Format
to	SVAA	BMRA-I032	Demand Control Instructions to SVAA	Electronic data file transfer, Pool Transfer File Format
From	SVAA	SAA-I045	BM Unit Allocated Demand Disconnection Volume	Electronic data file transfer, Pool Transfer File Format

3.2.5 Transfer Coordinator Interfaces

Dir'n	User	Agent-id	Name	Type
To	Transfer Coordinator	CRA-I023	Issue Registration Transfer Report	Manual
from	Transfer Coordinator	CRA-I038	Transfer from SMRS information	Manual
to	Transfer Coordinator	CRA-I039	Transfer from SMRS report	Manual
from	Transfer Coordinator	CRA-I040	Transfer to SMRS information	Manual
to	Transfer Coordinator	CRA-I041	Transfer to SMRS report	Manual

Dir'n	User	Agent-id	Name	Type
from	Transfer Coordinator	CDCA-I055	Transfer from SMRS information	Manual
to	Transfer Coordinator	CDCA-I056	Transfer from SMRS report	Manual
from	Transfer Coordinator	CDCA-I057	Transfer to SMRS information	Manual
to	Transfer Coordinator	CDCA-I058	Transfer to SMRS report	Manual

DRAFT

3.2.6 Internal Interfaces

From	To	Name	Type
BMRA-I007	SAA-I003	SAA Balancing Mechanism Data	Electronic data file transfer
BMRA-I007	ECVAA-I048	SAA/ECVAA Balancing Mechanism Data	Electronic data file transfer
BMRA-I010	CRA-I030	Data Exception Reports	Electronic data file transfer
CDCA-I027	SAA-I004	Aggregated Interconnector Meter Flow Volumes	via shared database
CDCA-I028	SAA-I004	Aggregated BM Unit Metered Volumes	via shared database
CDCA-I036	SAA-I004	GSP Group Take to SAA	via shared database
CDCA-I040 ⁷	ECVAA-I015	BM Unit 'Credit Cover' Meter Volume Data	Electronic data file transfer
CDCA Site Visit Agent	CDCA-I020	Site Visit Inspection Report	Manual
CDCA Site Visit Agent	CDCA-I035	Site Visit Report on Aggregation Rule compliance	Manual
CRA-I013	ECVAA-I001	Issue Authentication Report	Electronic data file transfer
CRA-I013	SAA-I001	Issue Authentication Report	Via shared database
CRA-I015	BMRA-I001	BM Unit and Energy Account Registration Data	Electronic data file transfer
CRA-I013	BMRA-I001	Issue Authentication Report	Electronic data file transfer
CRA-I015	ECVAA-I001	BM Unit and Energy Account Registration Data	Electronic data file transfer
CRA-I015	SAA-I001	BM Unit and Energy Account Registration Data	Via shared database
CRA-I017	ECVAA-I001	Credit Assessment Export Capability	Electronic data file transfer
CRA-I017	SAA-I002	Credit Assessment Export Capability	Via shared database
CRA-I019	CDCA-I002	Registration Data	Via shared database
CRA-I036	ECVAA-I030	Notification Agent Termination Request	Manual
ECVAA-I011	SAA-I008	Account bilateral Contract Volume Report	Electronic data file transfer
ECVAA-I012	SAA-I008	MVR Notification Report	Electronic data file transfer
ECVAA-I016	CRA-I030	ECVAA Data Exception Report	Electronic data file transfer
ECVAA-I031	CRA-I037	Notification Agent Termination Feedback	Manual
ECVAA-I036	BMRA-I018	Publish Credit Default Notices	Electronic data file transfer
ECVAA-I047	CRA-I045	Withdrawing Party Authorisation and Notification Details	Manual
SAA-I013	ECVAA-I033	Credit/Debit Reports	Electronic data file transfer
SAA-I016	CDCA-I034	Settlement Calendar (Part 1)	Manual
SAA-I017	CDCA-I050	Data Exception Reports (Part 1)	Via shared database
SAA-I017	CRA-I030	Data Exception Reports (Part 1)	Via shared database
SAA-I017	ECVAA-I020	Data Exception Reports (Part 1)	Electronic data file transfer
SAA-I037	CRA-I046	Withdrawing Party Settlement Details	Via shared database
SAA-I043	CDCA-I066	Demand Control Instructions to CDCA	Via shared database
SAA-I044	CDCA-I068	Period BM Unit Demand Disconnection Volumes	Via shared database

3.2.7 EMR Settlement Services Provider Interfaces

Dir'n	User	Agent-id	Name	Type
to	EMR Settlement Services Provider	SAA-I014	Settlement Report	Electronic data file transfer
to	CfD Settlement Services Provider	SAA-I042	BM Unit Gross Demand Report	Electronic data file transfer, XML

⁷ P215

4 Interfaces From and To Multiple Parties

This section covers a number of interfaces which are common to more than one party.

4.1 CRA-I004: (input) BSC Service Agent Details

Interface ID: CRA-I004 (EPFAL ref FAA-I033)	Source: BSCCo Ltd, BSC Service Agents, FAA, SVAA	Title: BSC Service Agent Details	BSC Reference: CRA SD 4.3, CRA BPM 3.1, ERM, CP756, P82
Mechanism: Manual, by email, letter or fax, or can be sent as an electronic data file over the network	Frequency: As Necessary	Volumes: Low	
<p>The CRA shall receive the registration details for BSC Service Agents, including FAA and SVAA. The details will come from BSCCo Ltd in the first place. Updates will come from the agents themselves.</p> <p>Action Description</p> <p><u>Authentication Details</u> Name Password</p> <p><u>BSC Service Agent Details</u> Agent Name Agent Identifier</p> <p><u>Service Agent Role Details</u> Agent Type Effective From Date Effective To Date</p> <p><u>Role Address Details</u> Address Telephone No Fax No e-mail Address</p>			
<p>Physical Interface Details: A physical structure is defined for this manual interface because the registrant can send this information as an electronic data file over the network; the CRA operator enters the information via a screen-based interface however it is sent.</p>			

4.2 CRA-I013: (output) Issue Authentication Report

Interface ID: From: CRA-I013 To: BMRA-I001 To: ECVAA-I001 To: SAA-I001 <i>EPFAL Ref: FAA-I025</i>	User: FAA ECVAA SAA SO BSCCO	Title: Issue Authentication Report	BSC Reference: CRA SD App B, Serial 4, CRA BPM 4.11, CRA SD 4.1.1.e, CR12, P78, CP918, CP975 CP1193
Mechanism: Electronic data file transfer (except via Shared Database to SAA)	Frequency: Daily or additionally as necessary	Volumes: Low	
<p>The CRA system shall issue a report containing the authentication details for a BSC Party or Party Agent. The Authentication details shall consist of:</p> <p><u>Authentication Details</u></p> <ul style="list-style-type: none"> <u>BSC Party Details</u> <ul style="list-style-type: none"> Action Code BSC Party Name BSC Party ID <u>Party Role Details</u> <ul style="list-style-type: none"> Action Code Party Type Registration Effective From Date Registration Effective To Date <u>Role Address Details</u> <ul style="list-style-type: none"> Action Code Address Telephone No Fax No e-mail Address <u>Settlement Report Details</u> <ul style="list-style-type: none"> Action Code Report Type Distribution Method <u>Authorised Signatories</u> <ul style="list-style-type: none"> Action Code Name Password Contact Phone No e-mail Address <u>Authorisation Levels</u> <ul style="list-style-type: none"> Action Code Activity Effective From Date Effective To Date <u>BSC Party Agent Details</u> <ul style="list-style-type: none"> Action Code Agent Name BSC Party Agent ID <u>Agent Role Details</u> <ul style="list-style-type: none"> Action Code BSC Party Agent Type Registration Effective From Date Registration Effective To Date 			

<p><u>Role Address Details</u> Action Code Address Telephone No Fax No e-mail Address</p> <p><u>Authorised Signatories</u> Action Code Name Password Contact Phone No e-mail Address</p> <p><u>Authorisation Levels</u> Action Code Activity Effective From Date Effective To Date</p> <p><u>Market Index Data Provider Details</u> Action Code Market Index Data Provider Name Market Index Data Provider ID</p> <p><u>Market Index Data Provider Effective Dates</u> Action Code Provider Effective From Settlement Date Provider Effective To Settlement Date</p> <p>The first field of each record of the report is an Action Code, indicating whether the record has a) been added or changed; b) been deleted or c) not changed. On request the CRA will provide the FAA with copies of sample signatures for Authorised Signatories.</p>
<p>Physical Interface Details:</p>

4.3 CRA-I015: (output) BM Unit, Interconnector and GSP Group Data

<p>Interface ID: From: CRA-I015 To: SAA-I001 To: BMRA-I001 To: ECVAA-I001 EPFAL Ref: FAA-I026</p>	<p>User: SAA, BMRA, ECVAA FAA, Stage 2 MDDA</p>	<p>Title: BM Unit, Interconnector and GSP Group Data</p>	<p>BSC Reference: CRA BPM 3.8, SCH: 4, B, 2.5.2 RETA SCH: 4, B, 2.6.1 SAA SD: 2.7, 5.3.1, A1 SAA BPM: 3.1, 4.26, 4.6, CRA BPM 4.14, CP551, P100, P215</p>
<p>Mechanism: Shared database to SAA; Electronic Data File transfer to BMRA, ECVAA, FAA, SVAA (Pool Transfer File Format to Stage 2 MDDA)</p>	<p>Frequency: Daily</p>	<p>Volumes:</p>	
<p>Interface Requirement:</p> <p>The CRA Service shall issue Registration data once a day or more frequently if multiple changes occur to the SAA service via the shared database.</p> <p>The CRA Service shall issue Registration data once a day to the BMRA, ECVAA and FAA services. In this case, the information is transferred via file transfer</p> <p>The Registration data shall include:</p>			
<p><u>BM Unit, Interconnector and GSP Group Details</u></p>			

Proportion of Losses Details

Action Code
 Proportion of Losses (alpha)
 Effective From Date

Trading Unit Registration

Action Code
 Trading Unit Name
BM Unit Details
 Action Code
 BM Unit ID
 Effective From Date
 Effective To Date

BM Unit Registration

Action Code
 BM Unit Name
 BM Unit ID
 BM Unit Type
 Lead Party ID
 NGC BM Unit Name
 GSP Group ID (optional)
 GSP Group Name (optional)
 Generation Capacity (MW)
 Demand Capacity (MW)
 Production / Consumption Flag⁸
 Transmission Loss Factor (TLF_{ij})
 FPN Flag
 Credit Qualifying Status
 Demand in Production Flag
 Interconnector ID
[Working Day BM Unit Credit Assessment Import Capability\(MW\)](#)
[Non-Working Day BM Unit Credit Assessment Import Capability\(MW\)](#)

[Working Day BM Unit Credit Assessment Export Capability\(MW\)](#)
[Non-Working Day BM Unit Credit Assessment Export Capability\(MW\)](#)
 Effective From Date
 Effective To Date

Joint BM Unit Details

Action Code
 Joint BM Unit ID
 Effective From Date
 Effective To Date

Joint BM Unit Details

Action Code
 BM Unit ID

Interconnector Registration Details

Action Code
 Interconnector ID
 Interconnector Administrator ID
 Interconnector Error Administrator ID
 Effective From Date
 Effective To Date

GSP Group Registration

Action Code
 GSP Group ID
 GSP Group Name
 Distributor BSC Party ID
 Effective From Date

⁸ For the interface to ECVAA and BMRA, the Production / Consumption Flag data item actually refers to Production / Consumption Status which is dynamically derived if the Production / Consumption Flag is set to null, or the Production / Consumption Status can be fixed by setting the Production / Consumption Flag for Exempt Export BM Units only.

Effective To Date
<p>The first field of each record of the report is an Action Code, indicating whether the record has a) been added or changed; b) been deleted or c) not changed.</p> <p>Details of the registration of Stage 2 BM Units are sent to the Stage 2 MDDA; this is shown as CRA-I015 sub-flow 2 in the physical flow definition (Stage 2 section). The flow to Stage 2 will always consist of the complete set of BM Unit / GSP Group / Supplier relationships from the CRA database, and will be sent whenever there is a change. A Change is determined to have happened if the flow generated is not the same as the previously generated flow (generally the flow generated on the previous day).</p> <p>Sub-flow 2 will summarise contiguous BM Unit effective date ranges as a single record in the flow with an Effective From Date equal that of the earliest record in the contiguous block, and an Effective To Date equal to that of the latest (this may be null for open ended records).</p> <p>Sub-flow 2 will report historic data for a BM Unit in addition to current and future data.</p>
Physical Interface Details:

4.4 CRA-I020: (output) Operations Registration Report

Interface ID: CRA-I020	User: BSCCo Ltd, SO	Title: Operations Registration Report	BSC Reference: CRA SD A-2, CRA BPM 3.8, CRA BPM 4.10, LDM, RETA SCH 4,B, 2.2.2, P100, CP962, CP642, P215, P310
Mechanism: Electronic data file transfer	Frequency: Daily	Volumes: Low	
<p>The CRA system shall issue a report detailing centrally registered data to the BSCCo Ltd.</p> <p>The report is used to ensure that data held between the BSCCo Ltd and CRA are consistent. The report also goes to the SO and shall contain the following information:</p> <p><u>Operations Registration Details</u></p> <p style="padding-left: 40px;"><u>Proportion of Losses Details</u> Action Code Proportion of Losses (alpha) Effective From Date</p> <p style="padding-left: 40px;"><u>Trading Unit Registration</u> Action Code Trading Unit Name</p> <p style="padding-left: 40px;"><u>BM Unit Registration</u> Action Code BM Unit ID BM Unit Type Lead Party ID NGC BM Unit Name BM Unit Name GSP Group ID GSP Group Name Trading Unit Name Generation Capacity (MW)</p>			

<p>Demand Capacity (MW) WDCALF⁹ NWDCALF¹⁰</p> <p>SECALF¹¹ WDBMCAIC NWDBMCAIC</p> <p>WDBMCAEC NWDBMCAEC</p> <p>Production/Consumption Flag Production / Consumption Status Exempt Export Flag Base TU Flag Transmission Loss Factor FPN Flag Manual Credit Qualifying Flag Credit Qualifying Status Interconnector ID Effective From Date Effective To Date</p> <p><u>BM Unit Group Details</u> Action Code Joint BM Unit ID Effective From Date Effective To Date <u>Joint BM Unit Details</u> Action Code BM Unit Id</p> <p><u>Interconnector Registration Details</u> Action Code Interconnector ID Interconnector Administrator ID Interconnector Error Administrator ID Effective From Date Effective To Date</p> <p>The first field of each record of the report is an Action Code, indicating whether the record has a) been added or changed; b) been deleted or c) not changed.</p>
<p>Physical Interface Details:</p> <p>This report can be issued either as an incremental report, containing only changes since the last report, or as a full refresh. The CRA system will issue a full refresh report detailing centrally registered data to the BSCCo Ltd on a weekly basis.</p> <p>For Incremental reports, changed and deleted records are included (with Action Codes (a) and (b) respectively), but for full report all records are reported, including those that have not changed (Action Code (c)).</p> <p>Where a BM Unit's association with Trading Units changes on a date where no other BM Unit attributes change, the BM Unit information will be reported as separate date ranges in order to accurately report the association.</p> <p>Where a BM Unit's Production / Consumption Status changes on a date where no other BM Unit attributes change (for example as a result of another BM Unit being added or removed from the Trading Unit to which the BM Unit belongs), the BM Unit information will be reported as separate date ranges in order to accurately report the changing status.</p>

9 With the exception that any [WDCALF](#) or [SECALF](#) value exceeding ±9.9999999 shall be capped and reported as ±9.9999999 in the CRA-I020. The values of [WDBMCAIC](#) and [WDBMCAEC](#) reported in the CRA-I020 will still be derived using the 'real' uncapped [WDCALF](#) value.

10 With the exception that any [NWDCALF](#) value exceeding ±9.9999999 shall be capped and reported as ±9.9999999 in the CRA-I020. The values of [NWDBMCAIC](#) and [NWDBMCAEC](#) reported in the CRA-I020 will still be derived using the 'real' uncapped [NWDCALF](#) value.

11 With the exception that any [SECALF](#) value exceeding ±9.9999999 shall be capped and reported as ±9.9999999 in the CRA-I020. The values of [WDBMCAEC](#) and [NWDBMCAEC](#) reported in the CRA-I020 will still be derived using the 'real' uncapped [SECALF](#) value.

4.5 CRA-I028: (output) NGC Standing Data Report

Interface ID: CRA-I028	User: System Operator, BSCCo Ltd	Title: NGC Standing Data Report	BSC Reference: CR_991027_06a
Mechanism: Electronic data file transfer	Frequency: As required	Volumes: Very low volume	
<p>The CRA system, shall, on a change of details for BM Unit Names, GSP ID, Boundary Point ID, and Party ID's, issue a report on the change to the SO containing the following.</p> <p>BSC Party Details BSC Party ID BSC Party Name</p> <p>BM Unit Details BM Unit ID BM Unit Name NGC BM Unit Name</p> <p>GSP Group Details GSP Group ID GSP Group Name</p> <p>GSP Details GSP ID</p> <p>Inter-GSP-Connection Details Inter-GSP-Connection ID</p> <p>Boundary Point Details Boundary Point ID</p> <p>Metering System Details Metering System ID</p>			
Physical Interface Details:			

4.6 ECVAA-I016: (output) ECVAA Data Exception Report

Interface ID: From: ECVAA-I016 To: CRA-I030 <i>EPFAL Ref: FAA-I024</i>	User: FAA, CRA	Title: ECVAA Data Exception Report	BSC Reference: ECVAA SD: 4.2, 5.2
Mechanism: Electronic data file transfer	Frequency: As required.	Volumes: Low	
Interface Requirement:			
The ECVAA Service shall issue Exception Reports once a day to the CRA to report registration data validation failures.			
The ECVAA Service shall issue Exception Reports as required to the FAA, to report credit limit data validation failures.			
The Exception Reports shall include:			
File Header of file being processed Exception Type Exception Description			

4.7 ECVAA-I025: (output) Credit Cover Minimum Eligible Amount Report

This interface is defined in Part 1 of the Interface Definition and Design.

4.8 SAA-I013: (output) Credit/Debit Reports

Interface ID: SAA-I013 ECVAA-I033 <i>EPFAL Ref:</i> FAA-I022, FAA-I023	User: FAA ECVAA	Title: Credit/Debit Reports	BSC Reference: RETA SCH: 4, B, 2.1.1 SAA SD: 3.53.2, 3.54, 4.1, 4.2, A2 SAA BPM: 3.17, 4.14, 4.15 SAA IRR: SAA5, SAA7, SAA8, SAA9, CP527, P2, CP632
Mechanism: Electronic data file transfer	Frequency: Daily	Volumes: One per Settlement Run	
<p style="text-align: center;">Interface Requirement:</p> <p>The SAA Service shall issue Credit/Debit Reports to the ECVAA Service for all Interim Initial Settlement Runs, and to the FAA Service for all other Settlement Runs.</p>			
<p>The Credit/Debit Reports shall include:</p>			
Settlement Date Settlement Run Type BSC Party ID Charge Type Indicator (may be one of): Administration Charge Energy Imbalance Cashflows Information Imbalance Charges Non-delivery Charge Residual Cashflow Reallocations Daily Party BM Unit Cashflow System Operator BM Cashflow Charge (Charge Type Indicator and Charge repeated for each charge type and for each BSC Party Id, including parties which have no charges in this run)			
<p>Physical Interface Details:</p>			

5 Interfaces From and To System Operators

5.1 BMRA-I002: (input) Balancing Mechanism Data

Interface ID: BMRA-I002	Source: System Operators	Title: Balancing Mechanism Data	BSC Reference: See verification table, P71, CP921, Variation 60, CP1223, P217, P305
Mechanism: Electronic data file transfer, NGC File Format	Frequency: Continuous (as made available from SO)	Volumes:	
<p>The Balancing Mechanism data consists of the following files, as defined in the NGC tab of the IDD Part 2 Spreadsheet</p> <p>Gate Closure Data:</p> <ul style="list-style-type: none"> Physical Notification File (PN) Quiescent Physical Notification File (QPN) Bid-Offer Data File (BOD) <p>Declaration Data</p> <ul style="list-style-type: none"> Maximum Export Limit File (MELS) Maximum Import Limit File (MILS) Run Up Rate Export File (RURE) Run Up Rate Import File (RURI) Run Down Rate Export File (RDRE) Run Down Rate Input File (RDRI) Notice to Deviate From Zero File (NDZ) Notice to Deliver Offers File (NTO) Notice to Deliver Bids File (NTB) Minimum Zero Time File (MZT) Minimum Non-Zero Time File (MNZT) Stable Export Limit File (SEL) Stable Import Limit File (SIL) Maximum Delivery Volume File (MDV) Maximum Delivery Period File (MDP) <p>For Settlement Dates prior to the P217 effective date this flow shall also include:</p> <ul style="list-style-type: none"> Acceptance and Balancing Services Data Bid-Offer Acceptance Level File (BOAL) BM Unit Applicable Balancing Services Volume (QAS) <p>For Settlement Dates after and including the P217 effective date this flow shall also include:</p> <ul style="list-style-type: none"> Acceptance and Balancing Services Data Bid-Offer Acceptance Level Flagged File (BOALF) BM Unit Applicable Balancing Services Volume (QAS) <p>For Settlement Dates after and including the P305 effective date this flow shall also include:</p> <ul style="list-style-type: none"> Demand Control Instructions STOR Availability Window Loss of Load Probability and De-rated Margin Data Loss of Load Probability De-Rated Margin 			
<p>Physical Interface Details: Further clarification of the content of the input data from the SO is given below:</p> <p>FPN (& QPN) data will arrive as pairs of points, each pair will have a from & to level and a from & to time. There will ALWAYS be a pair starting at the beginning of a settlement period</p>			

There will ALWAYS be a pair ending at the end of a settlement period pairs will not overlap

If there is more than one pair for a settlement period, the end time of one pair will be the start time of another (but with possibly different levels to indicate a step function)

Bid-Offer values will arrive as pairs of points, each pair will have a from & to level and a from & to time
 For day 1, the from & to level will be the same
 the level is relative - i.e. it is the width of the current band, so for BO set 1 the level is the increase from FPN; for set 2 the level is the increase from FPN + level 1

Bid-Offer acceptances are absolute.

The records will be ordered by BM Unit and within this by date / time. For Bid-Offer Acceptances (BOA), the SO initially intends to send each BOA in a separate file. The BOAL records within the file will be ordered according to date / time. Note that the SO reserves the right to include multiple BOAs per file; in this case, the records will be ordered by BM Unit, acceptance time and BOAL date / time.

QAS can be positive or negative and is normally only provided where there is a non-zero volume.

Maximum Import and Export Limit Files can be one of two possible formats: MIL /MEL or MILS/MELS. The MILS and MELS files contain additional information, in the form of a timestamp and a sequence number, which is used to ensure that the data stored and published to parties is correct irrespective of the order in which the data is received. Note: the MEL/MIL format files were operationally discontinued since CP921

5.2 BMRA-I003: (input) System Related Data

Interface ID: BMRA-I003	Source: System Operators	Title: System Related Data	BSC Reference: See verification table, P172, P243
Mechanism: Electronic data file transfer, NGC File Format	Frequency: Continuous (as made available from SO)	Volumes:	
<p>Logical:</p> <p>The System Related data consists of the following files, as defined in the NGC tab of the IDD Part 2 Spreadsheet:</p> <ul style="list-style-type: none"> Indicated Generation File (INDGEN) Indicated Demand File (INDDEM) National Demand Forecast File (NDF) Transmission System Demand Forecast File (TSDF) Initial Demand Out-Turn File (INDO) Initial Transmission System Demand Out-Turn File (ITSDO) National Demand Forecast Day File (NDFD) Transmission System Demand Forecast Day File (TSDFD) National Demand Forecast Week File (NDFW) Transmission System Demand Forecast Week File (TSDFW) Forecast national Surplus Data for 2-14 days File (OCNMFD)¹² Forecast national Surplus Data for 2-52 weeks File (OCNMFV)¹³ National Generating Plant Demand Margin, 2-14 Day (OCNMF2) National Generating Plant Demand Margin, 2-52 Week (OCNMF2) 			

¹² Where OCNMFD is referred to it should be interpreted as being equivalent to SPLD.

¹³ Where OCNMFV is referred to it should be interpreted as being equivalent to SPLW.

National Output Usable, 2-14 Day (NOU2T14D)
 National Output Usable by Fuel Type, 2-14 Day (FOU2T14D)
 National Output Usable by Fuel Type and BM Unit, 2-14 day (UOU2T14D)
 National Output Usable, 2-49 Day (NOU2T49D)
 National Output Usable, 2-52 Week (NOU2T52W)
 National Output Usable by Fuel Type, 2-52 Week (FOU2T52W)
 National Output Usable by Fuel Type and BM Unit, 2-52 Week (UOU2T52W)
 National Output Usable, 1 year (NOUY1)
 National Output Usable, 2 year (NOUY2)
 National Output Usable, 3 year (NOUY3)
 National Output Usable, 4 year (NOUY4)
 National Output Usable, 5 year (NOUY5)
 Zonal Output Usable, 2-14 Day (ZOU2T14D)
 Zonal Output Usable, 2-49 Day (ZOU2T49D)
 Zonal Output Usable, 2-52 Week (ZOU2T52W)
 Zonal Output Usable, 1 year (ZOUY1)
 Zonal Output Usable, 2 year (ZOUY2)
 Zonal Output Usable, 3 year (ZOUY3)
 Zonal Output Usable, 4 year (ZOUY4)
 Zonal Output Usable, 5 year (ZOUY5)
 Indicated Margin File (MELNGC)
 Indicated Imbalance File (IMBALNGC)
 System Warnings (SYS_WARN)
 Temperature Outturn (TEMP)
 Wind Forecast (WINDFOR)
 Instantaneous Generation by Fuel Type (FUELINST)
 Half Hourly Generation by Fuel Type (FUELHH)
 Daily Energy Volume (INDOD)
 Non-BM STOR Instructed Volumes (NONBM)
 Transmission System Frequency (FREQ)

System warnings will be received as a “text block” rather than a boolean flag.

Note that the System Warnings functionality will be utilised, within existing constraints, to report the issuing of all Emergency Instructions, and to notify whether or not each instruction should be treated as an Excluded Emergency Acceptance.

In addition to the files above, from time to time the System Operator provides a System Zone Map (in pdf) and a spreadsheet detailing the mapping between NGC and BM Units, for download from the BMRS.

Physical Interface Details:

In cases where Fuel Type data is unavailable, the affected Fuel Types are omitted from any relevant files submitted to the BMRA by the System Operator.

The System Zone Map and BM Unit mapping spreadsheets are submitted to the BMRA as email attachments sent to the BSC Service Desk.

5.3 BMRA-I010: (output, common) Data Exception Reports

This interface is defined in Part 1 of the Interface Definition and Design.

Sub-flow 2 of BMRA-I010 is used when the exception report relates to adjustment data (NGC030). If enabled by a system parameter, a BMRA-I010 report will also be sent to confirm successful receipt of the adjustment data.

5.4 BMRA-I014: (input) Price Adjustment Data

Interface ID: BMRA-I014	Source: SO	Title: Price Adjustment Data	BSC Reference: P8, P78, CP1223, P217
Mechanism: Automatic	Frequency: continuous	Volumes: Each file will typically contain the data for one Settlement Date (a file may contain data for a single period, or covering multiple dates). Data for each Settlement Period will normally appear in 2-4 files.	
Interface Requirement: The BMRA Service shall receive the following data from the SO via an automatic interface. <u>Balancing Services Adjustment Data</u> Settlement Date Settlement Period (1-50) EBCA _i (Net Buy-Price Cost Adjustment)(Energy) EBVA _i (Net Buy-Price Volume Adjustment)(Energy) SBVA _i (Net Buy-Price Volume Adjustment)(System) BPA _i (Buy-Price Price Adjustment) ESCA _i (Net Sell-Price Cost Adjustment)(Energy) ESVA _i (Net Sell-Price Volume Adjustment)(Energy) SSVA _i (Net Sell-Price Volume Adjustment)(System) SPA _i (Sell-Price Price Adjustment) For Settlement Dates after, and including the P217 effective date, this flow shall also include: <u>Disaggregated Balancing Services Adjustment Data</u> Settlement Date Settlement Period Balancing Services Adjustment Action ID (unique for Settlement Period) Balancing Services Adjustment Action Cost (£) Balancing Services Adjustment Action Volume (MWh) Balancing Services Adjustment Action SO-Flag (True/False) For Settlement Dates after, and including the P305 effective date, the Disaggregated Balancing Services Adjustment Data file shall also include: Balancing Services Adjustment Action STOR Provider Flag ('T' or 'F')			
Balancing Services Adjustment Data for Settlement Dates after, and including the P217 effective date will always have a value of zero for the following data items: Net Energy Buy Price Cost Adjustment (EBCA) (£) Net Energy Buy Price Volume Adjustment (EBVA) (MWh) Net System Buy Price Volume Adjustment (SBVA) (MWh) Net Energy Sell Price Cost Adjustment (ESCA) (£) Net Energy Sell Price Volume Adjustment (ESVA) (MWh) Net System Sell Price Volume Adjustment (SSVA) (MWh) The BMRA will validate these values and, where they are found to be non-zero, set the values to zero and pass the details of the validation failure to BSCCo.			
Physical Interface Details:			
This file is in NGC File Format, using Group Definitions NGC32 and NGC36 respectively in the NGC tab of the spreadsheet			

Interface ID: BMRA-I014	Source: SO	Title: Price Adjustment Data	BSC Reference: P8, P78, CP1223, P217
Issues:			

5.5 BMRA-I020: (input) BM Unit Fuel Type List

Interface ID: BMRA-I020	Source: SO	Title: BM Unit Fuel Type List	BSC Reference: P220
Mechanism: Manual, MS Excel Spreadsheet, by email.	Frequency: As Necessary	Volumes: Infrequent, generally when new BM Units are added	
The BMRA shall receive the BM Unit Fuel Type List containing the following data:			
<u>BM Unit Details</u>			
NGC BM Unit Name			
BM Unit Identifier			
Primary Fuel Type			
Effective From Date			
Effective To Date			
<u>Registered Wind Generation Capacity Details</u>			
Total Registered Capacity			
Effective From Date			
Physical Interface Details:			
The details described above shall be provided to the BMRA as an MS Excel Spreadsheet.			

5.6 BMRA-I021: (input) Temperature Reference Data

Interface ID: BMRA-I021	Source: SO	Title: Temperature Reference Data	BSC Reference: P220
Mechanism: Manual, CSV, by email.	Frequency: Annually	Volumes: One record per day in a calendar year	
The BMRA shall receive the Temperature Reference containing the following data:			
<u>Temperature Details</u>			
Calendar Date			
Normal Reference Temperature			
Low Reference Temperature			
High Reference Temperature			
Physical Interface Details:			
The details described above shall be provided to the BMRA as a CSV text file.			

5.7 BMRA-I022: (input) Daily Energy Volume Reference Data

Interface ID: BMRA-I022	Source: SO	Title: Daily Energy Volume Reference Data	BSC Reference: P220
Mechanism: Manual, CSV, by email.	Frequency: Annually	Volumes: One record per day in a calendar year	
The BMRA shall receive the Daily Energy Volume Reference containing the following data: <u>Volume Details</u> Calendar Date Normal Reference Volume Low Reference Volume High Reference Volume			
Physical Interface Details: The details described above shall be provided to the BMRA as a CSV text file.			

5.8 BMRA-I023: (input) Wind Generation Registered Capacities

Interface ID: BMRA-I023	Source: SO	Title: Wind Generation Registered Capacities	BSC Reference: P220
Mechanism: Manual, MS Excel Spreadsheet, by email.	Frequency: As Necessary	Volumes: Infrequent, generally when new Power Park Modules are added	
The BMRA shall receive the Wind Generation Registered Capacities containing the following data: <u>Power Park Module Details</u> Power Park Module Identifier Power Park Module Name Registered Capacity (MW) <u>Total Registered Capacity of all Power Park Modules (MW)</u>			
Physical Interface Details: The details described above shall be provided to the BMRA as an MS Excel Spreadsheet. The effective-from date of the Total Registered Capacity shall be included in the body of the email.			

5.9 CDCA-I012: (output, part 1) Report Raw Meter Data

This interface is defined in Part 1 of the Interface Definition and Design.

5.10 CDCA-I029: (output, part 1) Aggregated GSP Group Take Volumes

This interface is defined in Part 1 of the Interface Definition and Design.

5.11 CDCA-I042: (output, part 1) BM Unit Aggregation Report

This interface is defined in Part 1 of the Interface Definition and Design.

5.12 CDCA-I049: (output) Total Demand per GSP

Interface ID: CDCA-I049	User: System Operator	Title: Total Demand per GSP	BSC Reference: CDCA SD 19.5 BPM IRR CDCA8, Clarification CR_991027_06a, CP527, CP559
Mechanism: Electronic data file transfer	Frequency: Daily, per aggregation run	Volumes: Of the order of hundreds of GSPs	
Interface Requirement:			
<p>Reports on aggregated meter flow volumes for each GSP in each GSP Group are sent to the System Operator, as follows for each GSP Group:</p> <p>GSP Group Id Settlement Date Settlement Run Type CDCA Run Number Date of aggregation GSP Id Settlement Period Import/Export indicator (I/E) Estimate Indicator Meter Volume</p> <p>Note that, where one GSP feeds multiple GSP Groups, the data for that GSP will be repeated in the section for each of those GSP Groups, and in each case the total Meter Volume for the GSP will be shown; it will not be apportioned between the GSP Groups.</p> <p>The Import/Export indicator indicates the direction of the energy flow: the Meter Volume is therefore unsigned.</p>			
Physical Interface Details:			

5.13 CDCA-I051: (output) Report Meter Technical Details

This interface is defined in Part 1 of the Interface Definition and Design.

5.14 CDCA-I067: (input) Disconnected CVA BM Units

This interface is defined in Part 1 of the Interface Definition and Design.

5.15 CRA-I007: (input/output) Boundary Point and System Connection Point Data

This interface is defined in Part 1 of the Interface Definition and Design.

5.16 CRA-I008: (input) Interconnector Registration Details

This interface is defined in Part 1 of the Interface Definition and Design.

5.17 CRA-I013: (output, common) Issue Authentication Report

This interface is defined in Section 4.

5.18 CRA-I014: (output, part 1) Registration Report

This interface is defined in Part 1 of the Interface Definition and Design. Registration reports for Interconnector registrations will be sent to the System Operators.

5.19 CRA-I020: (output) Operations Registration Report

This interface is defined in Section 4.

5.20 CRA-I028: (output) NGC Standing Data Report

This interface is defined in Section 4.

5.21 SAA-I012 (input, part 1) Dispute Notification

This interface is defined in Part 1 of the Interface Definition and Design.

5.22 SAA-I014 (output) Settlement Report

There are three variants of the Settlement Report. The first variant is sent to BSC Parties and is defined in Part 1 of the IDD. The second variant is sent to the System Operator and the BMRA and is defined here. The third variant is sent to BSCCo Ltd and is defined in section 7 of this document.

Interface ID: SAA-I014	User: System Operator, BSCCo Ltd BMRA	Title: Settlement Report	BSC Reference: CR_991027_06a, CP527, P8, P18A, CP597, CP610, CP754, CP797, P71, P78, P194, P217,CP1397, P305
Mechanism: Electronic data file transfer	Frequency: Daily per settlement run	Volumes:	
<p>The first part of the report contains general information:</p> <p><u>Settlement Day Information</u> Settlement Date Settlement Run Type SAA Run Number SAA CDCA Settlement Run Number SVAA CDCA Settlement Date SVAA CDCA Settlement Run Number SVAA SSR Run Number BSC Party Id</p> <p><u>Settlement Period Information (for all Settlement Dates)</u> Settlement Period (1-50) (j) System Buy Price SBP_j £/MWh System Sell Price SSP_j £/MWh Total Demand (sum of all negative QM_{ij}) Total Generation (sum of all positive QM_{ij}) Information Imbalance Price 1 (£/MWh) Information Imbalance Price 2 (£/MWh) Arbitrage Flag CADL_d Continuous Acceptance Duration Limit DMAT_d De Minimis Acceptance Threshold BPA_j (Buy Price Price Adjustment) (£/MWh) SPA_j (Sell Price Price Adjustment) (£/MWh)</p>			

Total Period Applicable Balancing Services Volume (TQAS_i) (MWh)
 Price Derivation Code (PDC_i)
 Total NIV Tagged Volume (MWh)

Settlement Period Information (for Settlement Dates prior to the P217 effective date)

EBCA_i (Net Energy Buy Price Cost Adjustment) (£)
 EBVA_i (Net Energy Buy Price Volume Adjustment) (MWh)
 SBVA_i (Net System Buy Price Volume Adjustment) (MWh)
 ESCA_i (Net Energy Sell Price Cost Adjustment) (£)
 ESVA_i (Net Energy Sell Price Volume Adjustment) (MWh)
 SSVA_i (Net System Sell Price Volume Adjustment) (MWh)

Settlement Period Information (for post P217 Settlement Dates):

Total System Accepted Bid Volume
 Total System Accepted Offer Volume
 Total System Tagged Accepted Bid Volume
 Total System Tagged Accepted Offer Volume
 Total System Repriced Accepted Bid Volume
 Total System Repriced Accepted Offer Volume
 Total System Originally-priced Accepted Bid Volume
 Total System Originally-priced Accepted Offer Volume
 Total System Adjustment Sell Volume
 Total System Adjustment Buy Volume
 Total System Tagged Adjustment Sell Volume
 Total System Tagged Adjustment Buy Volume
 Total System Repriced Adjustment Sell Volume
 Total System Repriced Adjustment Buy Volume
 Total System Originally-priced Adjustment Sell Volume
 Total System Originally-priced Adjustment Buy Volume
 Replacement Price

Replacement Price Calculation Volume

Settlement Period Information (for post P305 Settlement Dates, otherwise will be null for Pre P305 dates):

STOR Availability Window Flag
 Loss of Load Probability
 De-rated Margin
 Value of Lost Load
 Reserve Scarcity Price

Market Index Information:

Market Index Data Provider
 Individual Liquidity Threshold
 Market Index Price
 Market Index Volume

Balancing Services Adjustment Action Data (post P217 only):

Balancing Services Adjustment Action Id
 Balancing Services Adjustment Action Cost (£)
 Balancing Services Adjustment Action Volume
 Tagged Balancing Services Adjustment Action Volume
 Repriced Balancing Services Adjustment Action Volume
 Originally-Priced Balancing Services Adjustment Action Volume
 Balancing Services Adjustment Action SO-Flag
 Balancing Services Adjustment Action STOR Provider Flag (Post P305 only; will be null for Pre P305 dates)

Trading Unit Period Information:

Trading Unit Name
 Total Trading Unit Metered Volume (MWh)

BM Unit Period Information:

BM Unit ID (i)
 Trading Unit Name
 Period FPN (FPN_{ij}) (MWh)
 BM Unit Metered Volume (QM_{ij}) (MWh)
 Transmission Loss Multiplier (TLM_{ij})
 BM Unit Applicable Balancing Services Volume (QAS_i) (MWh)

Maximum Export Limit Information:

Time From
 Level From (MW)
 Time to
 Level To (MW)

Maximum Import Limit Information:

Time From
 Level From (MW)
 Time to
 Level To (MW)

The second part of the report is split into a section for each BSC Party. Each such section contains the information sent to the individual party in the "first variant" of the Settlement Report as defined in IDD Part 1:

BSC Party Settlement Date information:

Settlement Date
 Settlement Run Type
 SAA Run Number
 SAA CDCA Settlement Run Number
 SVAA CDCA Settlement Date
 SVAA CDCA Settlement Run Number
 SVAA SSR Run Number
 BSC Party Id
 Aggregate Party Day Charges (defined in IDD Part 1 section 8.4.1)

Settlement Period Information:

Settlement Period (1-50) (j)
 Aggregate Party Period Charges (defined in IDD Part 1 section 8.4.2)
 System Period Data (defined in IDD Part 1 section 8.4.3)

Account Period Information:

Production/Consumption Flag (a)
 Account Period Data (defined in IDD Part 1 section 8.4.4)

Account Period BMU Information:

BM Unit ID (i)
 Account Period BMU Data (defined in IDD Part 1 section 8.4.5)

BM Unit Period Information:

BM Unit ID
 BM Unit Period Data (defined in IDD Part 1 section 8.4.6)
 Trading Unit Name
 Total Trading Unit Metered Volume (MWh)

BM Unit Period FPN Spot Points ($^{i}FPN_{it}$):

Time from
 FPN Value from
 Time to
 FPN Value to

BM Unit Period Bid-Offer Information:

Bid-Offer pair number (n)
 Bid-Offer Data (defined in IDD Part 1 section 8.4.7)

BM Unit Period Bid-Offer Spot Points ($^{i}QBO_{ij}^n$):

Time from
 Bid-Offer Value from
 Time to
 Bid-Offer Value to

BM Unit Period Bid-Offer Acceptance (for all Settlement Dates):

Bid-Offer Acceptance number
 CADL Flag

BM Unit Period Bid-Offer Acceptance (for post P217 Settlement Dates):
Acceptance SO-Flag

BM Unit Period Bid-Offer Acceptance (for post P305 Settlement Dates, otherwise will be null for Pre P305 dates):
Acceptance STOR Provider Flag
Reserve Scarcity Price Flag

BM Unit Period Bid-Offer Acceptance Spot Points (qA^k_{it}):
Time from
Bid-Offer Acceptance Level Value From
Time to
Bid-Offer Acceptance Level Value To

BM Unit Bid-Offer Pair Acceptance Volume Data (post P217 only):
Bid-Offer Pair Number
Bid-Offer Pair Acceptance Bid Volume
Bid-Offer Pair Acceptance Offer Volume

BM Unit MVR Information:
Subsidiary Party ID and Production/Consumption Flag (a)
MVR Data (defined in IDD Part 1 section 8.4.8)

Physical Interface Details:

This is sub-flow 2 of the Settlement Report, file id S0142.

For the Interim Initial and Final Reconciliation Settlement Runs, the full set of data is included in the file.

For all other Settlement Runs, certain information is only included if it has been changed: this applies to the

- Maximum Export Limit Information, (MEL),
- Maximum Import Limit Information (MIL),
- BM Unit Period FPN Spot Points (FP2),
- BM Unit Period Bid-Offer Spot Points (BO2), and
- BM Unit Period Bid-Offer Acceptance Spot Points (BO6).
- BM Unit Period Bid-Offer Information (BO4) which is only included where
 - a) there are changes to prices or
 - b) there are changes to underlying BM Unit Period Bid-Offer Spot Points (BO2) or
 - c) accepted bid or offer volume has been flagged as non-zero (i.e. NZ^n_i is set) in a previous Settlement Run that occurred on or after 11/3/03 or
 - d) where accepted bid or offer volumes are non-zero.
- BM Unit Bid-Offer Pair Acceptance Volume Data (BO7)

A 'change', as referred to above, is any new data generated since the last full run. For runs SF, R1, R2, and R3, this will be changes since the II run. For the DF run, this will be changes since the RF run. For example: if for an II run of the report the version of a particular data item reported was N, and it had a value of 10, then if for a subsequent R3 run's report the latest version of same item was now higher (version M, where $M > N$), then this newer version of the data item would be reported, no matter what the value was (i.e. even if it was now 10 again)

For FP2, BO2 and BO6, it is possible that the change being reported is that the record has been deleted; this is indicated by reporting nulls, e.g.

where there had been a record

BO2|10|123456.789|20|123456.789|

deletion of this record would be shown by

BO2|10||20||

Where a Bid-Offer Acceptance has been wholly or partially deleted, the BO3 record will be present, with the CADL Flag and Acceptance SO-Flag populated as normal. BO6 records relating to the deleted acceptance (or the deleted part of the acceptance, as the case may be) will be included on the report, but with NULL values for the

Bid Offer Acceptance Level Value From and Bid Offer Acceptance Level Value To.
--

Note:

SAA CDCA Settlement Run Number

Identifies the CDCA run which generated volumes used directly by SAA in the settlement calculations

For all settlement runs, other than Interim Initial for Settlement Dates prior to the P253 effective date:

SVAA CDCA Settlement Date

SVAA CDCA Settlement Run Number

Identify the CDCA run for Settlement Date which generated the GSP Group Take volumes which were allocated by the SVAA

SVAA SSR Run Number

Identifies the SVAA Run for Settlement Date which generated the SVA BM Unit volumes

For Interim Initial Settlement Runs for Settlement Dates prior to the P253 effective date:

SVAA CDCA Settlement Date

SVAA SSR Run Number

Identify the Settlement Date and Initial Settlement (SF) SVAA Run from which SVA volumes are derived

SVAA CDCA Run Number

Will be zero

5.23 **SAA-I017: (output, common) SAA Data Exception Report**

This interface is defined in Part 1 of the Interface Definition and Design.

Sub-flow 2 of SAA-I017 is used when the exception report relates to adjustment data (NGC030). If enabled by a system parameter, an SAA-I017 report will also be sent to confirm successful receipt of the adjustment data.

5.24 **SAA-I018 (output, part 1) Dispute Report**

This interface is defined in Part 1 of the Interface Definition and Design.

5.25 SAA-I026: (input) Price Adjustment Data

Interface ID: SAA-I026	Source: SO	Title: Price Adjustment Data	BSC Reference: P8, P78, P217, P305
Mechanism: Automatic	Frequency: continuous	Volumes: Each file will typically contain the data for one Settlement Date (a file may contain data for a single period, or covering multiple dates). Data for each Settlement Period will normally appear in 2-4 files.	
<p>Interface Requirement:</p> <p>The SAA Service shall receive the following data from the SO via an automatic interface.</p> <p><u>Balancing Services Adjustment Data</u> Settlement Date Settlement Period (1-50) EBCA_j (Net Buy-Price Cost Adjustment)(Energy) EBVA_j (Net Buy-Price Volume Adjustment)(Energy) SBVA_j (Net Buy-Price Volume Adjustment)(System) BPA_j (Buy-Price Price Adjustment) ESCA_j (Net Sell-Price Cost Adjustment)(Energy) ESVA_j (Net Sell-Price Volume Adjustment)(Energy) SSV_{Aj} (Net Sell-Price Volume Adjustment)(System) SPA_j (Sell-Price Price Adjustment)</p> <p>For Settlement Dates after, and including the P217 effective date, this flow shall also include:</p> <p><u>Disaggregated Balancing Services Adjustment Data</u> Settlement Date Settlement Period Balancing Services Adjustment Action ID (unique for Settlement Period) Balancing Services Adjustment Action Cost (£) Balancing Services Adjustment Action Volume (MWh) Balancing Services Adjustment Action System Flag (True/False)</p> <p>For Settlement Dates after, and including the P305 effective date, the Disaggregated Balancing Services Adjustment Data file shall also include:</p> <p>Balancing Services Adjustment Action STOR Provider Flag (True/False)</p>			
<p>Balancing Services Adjustment Data for Settlement Dates after, and including the P217 effective date will always have a value of zero for the following data items:</p> <p>EBCA_j (Net Buy-Price Cost Adjustment)(Energy) EBVA_j (Net Buy-Price Volume Adjustment)(Energy) SBVA_j (Net Buy-Price Volume Adjustment)(System) ESCA_j (Net Sell-Price Cost Adjustment)(Energy) ESVA_j (Net Sell-Price Volume Adjustment)(Energy) SSV_{Aj} (Net Sell-Price Volume Adjustment)(System)</p> <p>The SAA will validate these values and, where they are found to be non-zero, set the values to zero and pass the details of the validation failure to BSCCo.</p>			
Physical Interface Details:			

Interface ID:	Source:	Title:	BSC Reference:
SAA-I026	SO	Price Adjustment Data	P8, P78, P217, P305
Note that this file is in NGC File Format, and uses Group Definitions NGC32 and NGC36 respectively in the NGC tab of the spreadsheet			
Issues:			

5.26 SAA-I033: (input) Receive Request for Data Change

Interface ID:	Source:	Title:	BSC Reference:
SAA-I033	System Operator	Receive Request for Data Change	CP995, P172
Mechanism:	Frequency:	Volumes:	
Manual	Ad-hoc	Low	
Interface Requirement:			
The System Operator shall send to the SAA and BSCCo requests for data change where it is found that the data originally submitted was incorrect or incomplete.			
Where such a request relates to Emergency Instructions, the first line of the instruction should contain the words 'EMERGENCY INSTRUCTION'. In addition, where the Emergency Instruction is to be treated as an 'Excluded Emergency Acceptance', the request will also include the words 'EXCLUDED EMERGENCY ACCEPTANCE'. Where it is not to be treated as an 'Excluded Emergency Acceptance' the words 'EMERGENCY ACCEPTANCE' will be included in the request.			
Non Functional Requirement:			
Data changes are only applicable to the data types: BOAL, BOD, FPN, and QPN.			
Issues:			

5.27 BMRA-I024: (input) Large Combustion Plant Directive Spreadsheet¹⁴

Interface ID:	Source:	Title:	BSC Reference:
BMRA-I024	BSCCo	Large Combustion Plant Directive Spreadsheet	P226
Mechanism:	Frequency:	Volumes:	
Manual, MS Excel Spreadsheet, by email.	As Necessary	Adhoc	
The BMRA shall receive the Large Combustion Plant Directive Spreadsheet containing data (in a single spreadsheet) including:			

¹⁴ P226

<p>LCP Unit</p> <p>A register of BM Units that are part of a LCP Unit under the terms of the Directive</p> <p>The status of each LCP Unit:</p> <p>The cumulative operational hours from 1 January 2008 to date for each LCP Unit,</p> <p>The remaining operational hours for each LCP Unit for Opted Out Plant,</p> <p>NERP and ELV 'B Specific Limits' traded since 1 January 2008 and over the last month,</p> <p>Derogation applications details for each Opted In LCP Unit applied for, awaiting a decision</p> <p>Derogation applications details for each Opted In LCP Unit that have been granted,</p> <p>Emission limits for each Opted In LCP Unit.</p> <p>Details of notification of breakdown or malfunction of abatement equipment.</p> <p>The spreadsheet is only to be used within the BMRS as a downloadable file.</p> <p>Previous versions of the spreadsheet will also be available for download</p>
<p>Physical Interface Details:</p> <p>The details described above shall be provided to the BMRA as an MS Excel Spreadsheet for download from the BMRS website.</p>

5.28 BMRA-I025: (input) SO-SO Prices

Interface ID: BMRA-I025	Source: System Operator	Title: SO-SO Prices	BSC reference: CP1333
Mechanism: Electronic data file transfer, XML	Frequency: Continuous (as made available from SO)	Volumes: Up to 20 prices per Interconnector per hour (received as one file per Interconnector per hour) plus occasional resends and corrections of data (up to an extra 10% volume)	
<p>Logical:</p> <p>The BMRA shall receive SO-SO prices in an XML file and will include:</p> <ul style="list-style-type: none"> • The Resource Provider i.e. the System Operator who is offering the price. • The Acquiring Area and Connecting Area. These codes identify the TSO areas involved in a trade, and are used by the BMRA to identify the Interconnector to which the data relates. • The Resolution. This code identifies the length of the period of time to which the price relates (e.g. 60 minutes). • The Time Interval i.e. the start date and time of the period of time to which the price relates. • The Contract Identification, i.e. a code assigned by the System Operators that identifies a particular offer to increase or reduce flows on the Interconnector. • The Direction (up or down) in which the MW level would change. • The Currency (e.g. EUR or GBP). • The MW level and price. 			
<p>Physical Interface Details:</p> <p>This file will be received in a format defined by the XML Schema for Merit Order List documents (published in the ENTSO-E Reserve Resource Planning EDI library). The data items will be as defined in the XML Schema</p>			

5.29 BMRA-I026: (input) SO-SO Standing Data

Interface ID: BMRA-I026	Source: System Operator	Title: SO-SO Standing Data	BSC Reference: CP1333
Mechanism: Manual, MS Excel Spreadsheet, by email	Frequency: As necessary	Volumes: Infrequent, generally when new trading products are added	
<p>Logical:</p> <p>For reporting purposes, the BMRS associates SO-SO prices with a code (the SO-SO Trade Type) that identifies which Interconnector the price relates to, the Party offering the price, and the length of the time period to which it applies (e.g. 60 minutes).</p> <p>An appropriate SO-SO Trade Type is automatically allocated to each price received via the SO-SO Prices interface (BMRA-I025), based on the Resource Provider, Acquiring Area, Connecting Area and Resolution associated with that price.</p> <p>In order to support this process, the BMRA shall receive standing data defining the attributes associated with each SO-SO Trade Type:</p> <ul style="list-style-type: none"> • SO-SO Trade Type • Resource Provider Code • Connecting Area Code • Resolution Code • Currency • Effective From Date • Effective To Date 			
<p>Physical Interface Details:</p> <p>The details described above shall be provided to the BMRA as an MS Excel Spreadsheet.</p>			

5.30 BMRA-I028: (input) Receive REMIT Data

This interface is defined in Part 1 of the Interface Definition and Design.

5.31 BMRA-I029: (input) Receive Transparency Regulation Data

Interface ID: BMRA-I029	Source: System Operator	Title: Transparency Data	BSC reference: P295
Mechanism: Electronic data file transfer, XML and PDF	Frequency: Continuous (as made available from System Operator)	Volumes:	
<p>Logical:</p> <p>The BMRA shall receive Transparency Regulation Data in the form of XML and PDF files relating to the following categories:</p> <ul style="list-style-type: none"> • Load • Outages 			

- Transmission
- Congestion Management
- Generation
- Balancing

Each category contains a set of individual articles, each of which is represented by a particular file.

Physical Interface Details:

These files will be received in XML and PDF formats defined by ENTSO-E. Data items in XML files will be defined in the relevant XML Schemas; details area available from the Transparency section of the ENTSO-E Website (www.entsoe.eu).

DRAFT

6 Interfaces From and To FAA

6.1 CRA-I004: (input, common) BSC Service Agent Details

This interface is defined in Section 4.

6.2 CRA-I013: (output, common) Issue Authentication Report

This interface is defined in Section 4.

6.3 CRA-I015: (output, common) BM Unit and Energy Account Registration Data

This interface is defined in Section 4.

6.4 ECVAA-I006: (input) Credit Limit Data

Interface ID: ECVAA-I006 <i>EPFAL Ref: FAA-I019</i>	Source: FAA	Title: Credit Limit Data	BSC Reference: ECVAA SD: 5, A ECVAA BPM: 3.3, 4.17 RETA SCH: 4, B, 3.3, CR12
Mechanism: Electronic data file transfer	Frequency: Continuous, when credit limit data changes	Volumes: 1 file sent per BSC Party initially. 1 file sent per BSC Party upon change to Credit Limit	
Interface Requirement:			
The ECVAA Service shall receive Credit Limit data from the FAA Service as and when a BSC Party's credit limit changes.			
Note: Currently the FAA service only operates during normal working hours and therefore Credit Limit data will only be expected during these hours.			
The Credit Limit data shall include:			
<u>Party Credit Limit Details</u> BSC Party ID Effective From Settlement Date Credit Limit (MWh)			

6.5 ECVAA-I016: (output, common) ECVAA Data Exception Report


This interface is defined in Section 4.

6.6 SAA-I011: (input) Payment Calendar Data

Interface ID: SAA-I011	Source: BSCCo	Title: Payment Calendar Data	BSC Reference: RETA SCH: 4, B, 2.3.1 SAA SD: 2.8, A1 SAA BPM: 3.2, 4.27, CP527 CP1223
Mechanism: Manual (CSV file delivered as an email attachment, plus hard copy)	Frequency: Annual	Volumes: Draft: 1 file per year, CSV file. Agreed 1 file per year, data file plus hard copy.	
Interface Requirement:			
<p>The SAA Service shall receive Payment Calendar data annually from the BSCCo.</p> <p>The Payment Calendar data shall include:</p> <ul style="list-style-type: none"> Settlement Date Settlement Run Type Notification Date (the date by which SAA must provide the settlement data to the FAA) Payment Date Notification Period Payment Period 			

6.7 SAA-I013: (output, common) Credit/Debit Reports

This interface is defined in Section 4.

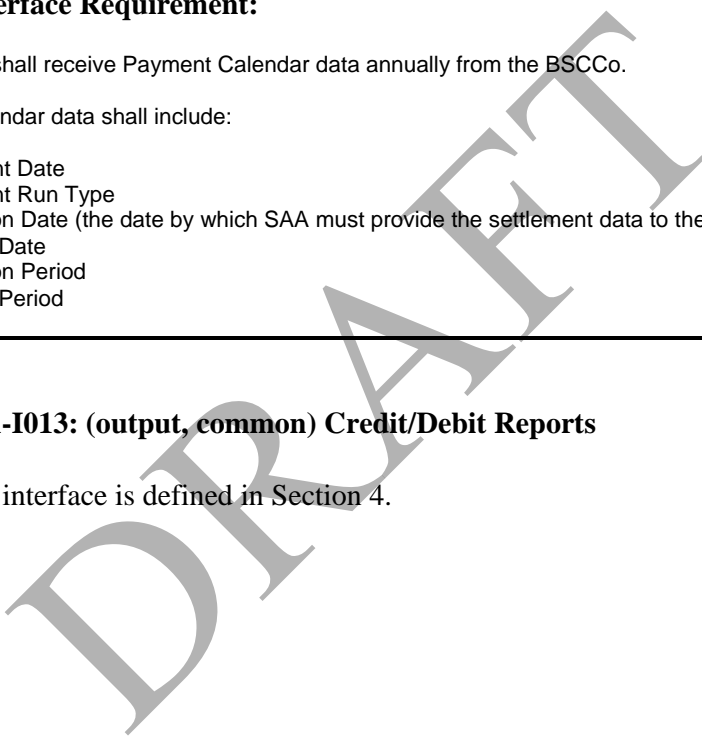

7 Interfaces From and To BSCCo Ltd

7.1 BMRA-I010: (output, common) Data Exception Reports

This interface is defined in Part 1 of the Interface Definition and Design.

7.2 BMRA-I011: (output) Performance Reports

Interface ID: BMRA-I011	User: BSCCo Ltd	Title: Performance Reports	BSC Reference: BMRA SD B1, B2, B3, B4, B5, B6, B7, P78
Mechanism: Manual, probably in whole or in part produced using a report-formatting tool.	Frequency: Monthly	Volumes: As required.	
<p>Interface Requirement:</p> <p>The BMRA Service shall issue Performance Reports to the BSCCo Ltd on a monthly basis.</p> <p>Performance reports shall include the following:</p> <ol style="list-style-type: none"> 1. All occurrences of BMRA outages exceeding 30 minutes; 2. All occurrences of valid registration data not incorporated in BMRA systems within 1 hour of receipt; 3. All occurrences of valid new or updated system related data not published within 5 minutes of receipt; 4. All occurrences of valid new balancing mechanism data not published within 5 minutes of receipt; 5. All occurrences of derived data not published within 15 minutes of settlement period end; 6. All tested occurrences of high grade BMR service user main screen not loaded within 10 seconds; 7. All tested occurrences of high grade BMR service user switch screen operations that exceed 1 second; 8. All tested occurrences of high grade BMR service user data downloads that do not begin within 1 minute of request. <p>BMRA will report on the performance of the Market Index Data Providers. This performance data will include the following information:</p> <ul style="list-style-type: none"> Month Ending Date Market Index Data Provider Identifier Number of Settlement Periods for which Market Index Data was not provided Number of Settlement Periods where Individual Liquidity Threshold required default by BMRA Number of Settlement Periods where zeroes were used in Indicative Calculations 			
<p>Physical Interface Details:</p>			

7.3 BMRA-I012: (input) System Parameters

Interface ID::	Status:	Title:	BSC Reference:
BMRA-I012	Mandatory	System Parameters	CR 003, P10, P18A, P194, P217, P305
Mechanism:	Frequency:	Volumes:	
Manual	Ad-hoc	Low – typically one or two per month	
Interface Requirement:			
<p>The BMRA Service shall receive the following system parameters from the BSCCo Ltd via a manual interface, expected to be either a fax or telephone call:</p> <ul style="list-style-type: none"> Effective from Settlement Date Effective from Settlement Period (1-50) Effective to Settlement Date Effective to Settlement Period (1-50) ETLMO+ ETLMO- Arbitrage Flag NRL_j (Notional Reserve Limit) (MW) DMAT_d (De Minimis Acceptance Threshold) (MWh) CADL_d (Continuous Acceptance Duration Limit) (minutes) PAR_d (Price Average Reference Volume) (MWh) (0-9,999,999,999) RPAR_d (Replacement Price Average Reference Volume) (MWh) VoLL (Value of Lost Load) (£/MWh) 			
Physical Interface Details:			
<p>The BSCCo Ltd system parameter values shall continue to apply to all settlement periods, until a change to a parameter is made.</p>			
Issues:			

7.4 BMRA-I013: (output) BMRA BSC Section D Charging Data

Interface ID: BMRA-I013	User: BSCCo Ltd	Title: BMRA BSC Section D Charging Data	BSC Reference: CR 65, CN160
Mechanism: Manual	Frequency: Monthly	Volumes:	
Interface Requirement:			
<p>The system shall, on the 15th working day of each month, collect information required for charging BSC parties under Section D of the Code and send this to BSCCo Ltd.</p> <p>The information included shall be:</p> <p>Month</p> <ul style="list-style-type: none"> Participant Id Participant Name Count of Physical lines installed Count of Comms Base Software (up to 5 users) Count of Comms additional Software (each additional user) <p>Each month the information will be produced for both the previous calendar month and the month before that. Data used shall be the latest available data from Interim Run and Initial Run only</p>			
Physical Interface Details:			

7.5 CDCA-I014: (output, part 1) Estimated Data Report

This interface is defined in Part 1 of the Interface Definition and Design.

7.6 BMRA-I016: (input) Receive Market Index Data Provider Thresholds

Interface ID: BMRA-I016	Source: BSCCo	Title: Receive Market Index Data Provider Thresholds	BSC Reference: P78
Mechanism: Manual	Frequency: Ad-hoc	Volumes: This manual flow is expected to handle a maximum of 6 date ranges to be defined, for each MIDP, for each year. Each date range to have a maximum of 4 different Liquidity Thresholds.	
Interface Requirement:			
<p>The BMRA shall receive Market Index Data Provider Liquidity Threshold data from BSCCo. The processing rules for this flow are described in BMRA-F008.</p> <p>The flow shall include:</p> <ul style="list-style-type: none"> Market Index Data Provider Identifier <ul style="list-style-type: none"> <u>MIDP Date Range</u> Action Type Effective From Settlement Date Effective To Settlement Date <u>MIDP Period Data</u> Effective From Settlement Period (1-50) Effective To Settlement Period (1-50) Liquidity Threshold <p>Action Type describes the type of operation to be performed in relation to the data supplied in the other fields. It can be one of:</p> <ul style="list-style-type: none"> • Insert; • Update; • Delete. 			
Physical Interface Details:			
Issues:			

7.7 BMRA-I017: (output) Report Market Index Data Provider Thresholds

Interface ID: BMRA-I017	User: BSCCo	Title: Report Market Index Data Provider Thresholds	BSC Reference: P78
Mechanism: Manual	Frequency: In response to BMRA-I016, as described in BMRA-F008	Volumes: This manual flow is expected to handle a maximum of 6 date ranges to be defined, for each DP, for each year. Each date range to have a maximum of 4 different Liquidity Thresholds.	
Interface Requirement:			
<p>The BMRA shall report Market Index Data Provider Liquidity Threshold to BSCCo.</p> <p>The flow shall include:</p> <ul style="list-style-type: none"> Market Index Data Provider Identifier <u>MIDP Date Range</u> Effective From Settlement Date Effective To Settlement Date <u>MIDP Period Data</u> Effective From Settlement Period (1-50) Effective To Settlement Period (1-50) Liquidity Threshold 			
Physical Interface Details:			
Issues:			

DRAFT

7.8 CDCA-I018: (output, part 1) MAR Reconciliation Report

This interface is defined in Part 1 of the Interface Definition and Design.

7.9 CDCA-I019: (output, part 1) MAR Remedial Action Report

This interface is defined in Part 1 of the Interface Definition and Design.

7.10 CDCA-I022: (input) Distribution Line Loss Factors

The BSC Parties send the Distribution Line Loss Factors to the BSCCo Ltd for validation, then the BSCCo Ltd sends them on to CDCA via this interface:

Interface ID: CDCA-I022	Source: BSCCo Ltd	Title: Distribution Line Loss Factors	BSC Reference: CDCA SD 15.1 CDCA BPM 4.5 (?), CP548
Mechanism: Electronic data file transfer	Frequency: Annually	Volumes: 17568000 factors (1000 metering systems * 366 * 48)	
Interface Requirement:			
<p>The CDCA receives Line Loss Factors relating to a Metering System from BSCCo Ltd.</p> <p style="text-align: center;"> Metering System Identifier Settlement Date Settlement Period Line loss Factor </p> <p>Note that each instance of the flow may contain up to 200000 records, and that it is legal for replacement data to be provided where necessary.</p>			
Physical Interface Details:			

7.11 CDCA-I023: (output) Missing Line Loss Factors

Interface ID: CDCA-I023	User: BSCCo Ltd	Title: Missing Line Loss Factors	BSC Reference: CDCA SD 15.2, CP527
Mechanism: Manual	Frequency: Monthly, covering a period of four months from the run date	Volumes: 17520000 factors (1000 metering systems * 365 * 48)	
Interface Requirement:			
<p>The CDCA shall validate such Line Loss Factors received from the BSCCo Ltd. Any missing or invalid factor values will be reported back to the BSCCo Ltd.</p> <p>Attributes are likely to include:</p> <p>File Reference for Line Loss Factors Date LLF File Received File Acceptance Status (all accepted, partially accepted, file rejected) Date of Acceptance Status File Rejection Reason (if File Acceptance Status = file rejected)</p> <p>Details of any individual exceptions: Metering System Identifier (for site specific Line Losses) Settlement Date Time Period Line Loss Factor Reason for rejection</p>			
Physical Interface Details:			

7.12 CDCA-I032: (output) Data Collection and Aggregation Performance Report

Interface ID: CDCA-I032	User: BSCCo Ltd (Customer)	Title: Data Collection and Aggregation Performance Report	BSC Reference: CDCA SD 19.6 CP1153
Mechanism: Manual, probably in whole or in part produced using a report-formatting tool.	Frequency: As below	Volumes:	
Interface Requirement:			
<p>CDCA shall provide performance reports on the data collection and data aggregation functions to the BSCCo Ltd.</p> <p>These shall include:</p> <p><i>Monthly, or immediately if service level falls below agreed level for each item:</i></p> <p>Percentage of total number of Outstation Channels interrogated; Percentage of total number of Outstation Channels successfully read by agreed time [eg 09:00 at Day+1]; Percentage of data needing to be estimated that was created in time for Interim Initial Settlement; Percentage of data needing to be estimated that was agreed with BSC Party in time for Initial Settlement; Percentage of raw meter data sent to relevant BSC Party by agreed time [eg 13:00 on Day+1]; Percentage of aggregated meter data which included estimates sent to SAA for Interim Initial Settlement; Percentage of aggregated meter data which included estimates sent to SAA for Initial Settlement;</p> <p><i>Monthly:</i></p> <p>Percentage of changed metered data reported to SAA in time for next Settlement Run for relevant Settlement Day; Percentage of occasions where Site appointments were kept on agreed date and time; Percentage of occasions where help desk queries were registered to agreed timescales; Percentage of occasions where help desk queries were responded to within agreed timescales according to severity level; Percentage of occasions where help desk queries were resolved to agreed timescales.</p> <p><i>Quarterly:</i></p> <p>Percentage of responses to MOA for Proving Test requests given by agreed time [eg 5 working days] for remote tests; Percentage of responses to MOA for Proving Test requests given by agreed time [eg 1 working day] for local tests; Percentage of suspected metering system faults notified to MOA within agreed time [eg 1 working day]; Percentage of MAR data and reports issued to BSC Party within agreed timescales [eg three, six or twelve months for a given metering system; refer to CDCA-F013 for details]; Percentage of reports issued in complete, accurate and correct format to BSC Parties and SAA over the period;</p> <p><i>Quarterly, or immediately if service level falls below agreed level for each item:</i></p> <p>Percentage of Proving Test results sent to MOA within agreed time [eg 1 working day] of completion;</p> <p><i>By exception and confirmed monthly:</i></p> <p>Percentage of cases where receipt of information from a BSC Party is confirmed back to Party within agreed timescales [eg 15 minutes for data received electronically]; Percentage of cases where information received from CRA or a BSC Party is processed within agreed timescales;</p>			
Physical Interface Details:			

7.13 CDCA-I047: (output, part 1) Correspondence Receipt Acknowledgement

This interface is defined in Part 1 of the Interface Definition and Design

7.14 CDCA-I061 (input) Receive System Parameters

Interface ID: CDAA-I061	Status: Mandatory	Title: System Parameters	BSC Reference: CP751
Interface Requirement:			
The CDCA Service shall receive the following system parameters from the BSCCo Ltd via a manual interface, expected to be either a fax or telephone call:			
Primary/Secondary Time-Shift Factor			
Physical Interface Details:			
The BSCCo Ltd system parameter values shall continue to apply to all settlement periods, until a change to a parameter is made.			
Issues:			

7.15 CDCA-I062: (input) Receive Sample Settlement Periods¹⁵

Interface ID: CDCA-I062	Source: BSCCo Ltd	Title: Receive Sample Settlement Periods	BSC Reference: P82
Mechanism: Manual	Frequency: Annually	Volumes: 600 periods	
Interface Requirement:			
CDCA shall receive the specification of all Load Periods and Sample Settlement Periods for the latest Reference Year from BSCCo Ltd, via a manual interface.			
CDCA shall receive the data for the latest Reference Year, no later than 5 October in the current BSC Year.			
The following information shall be included in the interface:			
Reference Year			
Load Period Name			
Settlement Date			
Sample Settlement Period			
Total Number of Sample Settlement Periods in Load Period			
Total Number of Settlement Periods in Load Period			
Physical Interface Details:			
A physical structure is defined for this manual interface because it will be processed automatically.			

¹⁵ This functionality was added for the Introduction of Zonal Transmission Losses on an Average Basis (P82), but will not be used.

7.16 CDCA-I064: (output) MOA Proving Tests Report

Interface ID: CDCA-I064	User: BSCCo Ltd	Title: MOA Proving Tests Report	BSC Reference: P99
Mechanism: Manual	Frequency: Monthly	Volumes: Low	
Interface Requirement:			
<p>CDCA shall report the following information to the BSCCo, after the end of every month:</p> <p><u>Participant Header</u> Market Sector Market Participant Role Code Meter Operator Agent Id Period End Date Periodicity</p> <p><u>CVA MOA Serial 1 Data</u> GSP Group ID Number of MSIDs for which Proving Test outstanding Average number of business days for which Proving Test is outstanding after scheduled date of Proving Test, at time of report Count of faults outstanding after scheduled date of Proving Test</p> <p>The report shall be produced in POOL file format, and sent to the BSCCo (as an email attachment) no later than 7 Business Days after the end of the month to which the data pertains.</p>			
Physical Interface Details:			
<p>The filename shall be CDCA133<last digit of the year number>.<MON>, where <MON> is the reporting month (e.g. JAN, FEB, etc.).</p> <p>See the physical flow for details, in the BSCCo Ltd tab of the IDD Part 2 spreadsheet.</p>			
ZHD Header information:			
File Type	='P0133001'		
From Role Code	='Z'		
From Participant Id	='CDCA'		
To Role Code	='Z'		
To Participant Id	='POOL'		
Creation Time	date and time (local) of file generation YYYYMMDDHHMISS		

7.17 CDCA-I065: (output) MOA Fault Resolution Report

Interface ID: CDCA-I065	User: BSCCo Ltd	Title: MOA Fault Resolution Report	BSC Reference: P99
Mechanism: Manual	Frequency: Monthly	Volumes: Low	
Interface Requirement:			
<p>CDCA shall report the following information to BSCCo Ltd, after the end of every month:</p> <p><u>Participant Header</u> Market Sector Market Participant Role Code Meter Operator Agent Id Period End Date Periodicity</p> <p><u>CVA MOA Serial 2 Data</u> GSP Group ID Number of MSIDs with fault Count of faults identified Average number of business days faults outstanding Average number of business days taken to resolve fault</p> <p>The report shall be produced in POOL file format, and sent to BSCCo Ltd (as an email attachment) no later than 7 Business Days after the end of the month to which the data pertains.</p>			
Physical Interface Details:			
<p>The filename shall be CDCA134<last digit of the year number>.<MON>, where <MON> is the reporting month (e.g. JAN, FEB, etc.).</p> <p>See the physical flow for details, in the BSCCo Ltd tab of the IDD Part 2 spreadsheet.</p>			
ZHD Header information:			
File Type	='P0134001'		
From Role Code	='Z'		
From Participant Id	='CDCA'		
To Role Code	='Z'		
To Participant Id	='POOL'		
Creation Time	date and time (local) of file generation YYYYMMDDHHMISS		

7.18 CRA-I001: (input & output, part 1) BSC Party Registration Data

This interface is defined in Part 1 of the Interface Definition and Design.

7.19 CRA-I003: (input, part 1) BSC Party Agent Registration Data

This interface is defined in Part 1 of the Interface Definition and Design.

7.20 CRA-I004: (input, common) BSC Service Agent Details

This interface is defined in Section 4.

7.21 CRA-I009: (input) Receive Manual Credit Qualifying Flag

Interface ID: CRA-I009	Source: BSCCo Ltd	Title: Manual Credit Qualifying Flag	BSC Reference: P215
Mechanism: Manual, by email, letter or fax	Frequency: As necessary	Volumes:	
<p>The CRA shall receive, from time to time the Manual Credit Qualifying Flag for a BM Unit from BSCCo Ltd. The information shall contain:</p> <p><u>Credit Qualifying Details</u> BM Unit Id Manual Credit Qualifying Flag (True/False) Effective From Date Effective To Date (can be undefined)</p>			
Physical Interface Details:			

7.22 CRA-I011: (input) Credit Assessment Load Factors

Interface ID: CRA-I011	Source: BSCCo Ltd	Title: CALF	BSC Reference: CRA SD 5.0, CRA BPM 3.5, CRA 4.5, ERM, RETA SCH 4,B, 2.4.2, CR 12, CP756, P310
Mechanism: Manual, by email, letter or fax	Frequency: As necessary	Volumes: approximately 4 times per year	
<p>The CRA- shall receive, from time to time the Credit assessment Load factor <u>Factors</u> from the BSCCo Ltd. The information shall contain:</p> <p>Action Description</p> <p><u>Authentication Details</u> Name Password</p> <p><u>BM Unit Credit Assessment Load Factor Details</u> BM Unit Id <u>Working Day</u> Credit Assessment Load Factor (<u>WDCALF</u>) <u>Non-Working Day Credit Assessment Load Factor (NWDALF)</u> Supplier Export Credit Assessment Load Factor (SECALF) Effective From Date</p>			

Physical Interface Details:

7.23 CRA-I020: (output, common) Operations Registration Report

This interface is defined in Section 4.

7.24 CRA-I028: (output) NGC Standing Data Report

This interface is defined in Section 4.

7.25 CRA-I029: (input) Transmission Loss Factors

Interface ID: CRA-I029	Source: BSCCo Ltd	Title: Transmission Loss Factors	BSC Reference: SAA SD: 2.6, A1 SAA BPM: 3.6, CP756
Mechanism: Manual, by email, letter or fax	Frequency: As required	Volumes: Very low volume	
Interface Requirement:			
<p>The CRA Service shall receive Transmission Loss data from BSCCo Ltd from time to time.</p> <p>The Transmission Loss data shall contain the following details:</p> <p><u>Authentication Details</u></p> <p style="padding-left: 20px;">Name Password</p> <p><u>Transmission Loss Details</u></p> <p style="padding-left: 20px;">Proportion of Losses (alpha) Effective From Date</p> <p><u>BM Unit Transmission Loss Details</u></p> <p style="padding-left: 20px;">BM Unit ID Transmission Loss Factor Effective from Date Effective to Date</p>			

7.26 CRA-I032: (output) CRA Performance Reports

This interface is defined in the CRA URS as a functional requirement rather than an interface requirement. The reference in the CRA URS is CRA-F027.

7.27 CRA-I034: (input) Flexible Reporting Request

Interface ID: CRA-I034	Source: BSCCo Ltd	Title: Flexible Reporting Request	BSC Reference: CR 53, CP756
Mechanism: Manual, by email, letter or fax	Frequency:	Volumes:	
Interface Requirement:			
<p>The CRA shall receive authorisations from BSCCo Ltd. to start or stop sending copies of a BSC Party report to another BSC Party.</p> <p><u>Requesting BSC Party Details</u> BSC Party Id BSC Party type</p> <p><u>Report Details</u> Report Type BSC Party Id BSC Party type Start/Stop Flag</p>			
Physical Interface Details:			
<p>The flow may contain requests from one or more BSC Parties, and each request may cover a number of report types/BSC Parties.</p>			

7.28 CRA-I035: (output) CRA BSC Section D Charging Data

Interface ID: CRA-I035	User: BSCCo Ltd	Title: CRA BSC Section D Charging Data	BSC Reference: CR 65, CN160, P100
Mechanism: Electronic data file transfer	Frequency: Monthly	Volumes:	
Interface Requirement:			
<p>The system shall, on the 15th working day of each month, collect information required for charging BSC parties under Section D of the Code and send this to BSCCo Ltd.</p> <p>The information included shall be:</p> <p>Month</p> <ul style="list-style-type: none"> Participant Id Participant Name Count of CVA Metering Systems Count of CVA BM Units Count of CVA Exempt Export BM Units Count of SVA Base BM Units Count of SVA additional BM Units Count of SVA Replacement Base BM Units Count of SVA Replacement additional BM Units Count of SVA Exempt Export BM Units <p>Each month the information will be produced for both the previous calendar month and the month before that. Data used shall be the latest available data from Interim Run and Initial Run only.</p>			
Physical Interface Details:			

7.29 CRA-I042: (input) Receive Market Index Data Provider Registration Data

Interface ID: CRA-I042	Source: MIDP	Title: Receive Market Index Data Provider Registration Data	BSC Reference: P78
Mechanism: Manual	Frequency: As Necessary	Volumes: Low	
Interface Requirement:			
<p>Both initial registration, and updates to details, of a Market Index Data Provider, will be done by BSCCo Ltd.</p> <p>The CRA shall receive Market Index Data Provider Details including the following:</p> <p>Action Description</p> <p><u>Market Index Data Provider Details</u></p> <ul style="list-style-type: none"> Market Index Data Provider Name Market Index Data Provider Identifier Provider Effective From Settlement Date 			

Interface ID: CRA-I042	Source: MIDP	Title: Receive Market Index Data Provider Registration Data	BSC Reference: P78
Mechanism: Manual	Frequency: As Necessary	Volumes: Low	
Provider Effective To Settlement Date			
<u>Contact Details</u>			
Name			
Address			
Telephone No			
Fax No			
e-mail Address			
Physical Interface Details:			

7.30 CRA-I043: (input) Receive Exempt Export Registration Data

Interface ID: CRA-I043	Source: BSCCo Ltd	Title: Receive Exempt Export Registration Data	BSC Reference: P100
Mechanism: Manual, by email, letter or fax	Frequency: As necessary	Volumes: Low	
CRA shall receive the Exempt Export registration details for a BM Unit from BSCCo Ltd via a manual interface.			
The flow shall include the following:			
<u>BM Unit Details</u>			
BSC Party Id			
BM Unit Id			
<u>Exempt Export Registration</u> Effective From Settlement Date			
Or,			
<u>Exempt Export De-Registration</u> Effective To Settlement Date			
Physical Interface Details:			

7.31 CRA-I044: (input) Withdrawals Checklist Request

Interface ID: CRA-I044	Source: BSCCo Ltd	Title: Withdrawals Checklist Request	BSC Reference: CP974
Mechanism: Manual, by email or fax	Frequency: Ad hoc	Volumes: Low	
<p>The CRA shall receive a request for the Withdrawals Checklist from BSCCo Ltd on an ad-hoc basis. The request shall contain the following information:</p> <p style="padding-left: 40px;">BSC Party / BSC Party Agent Name, and / or BSC Party / BSC Party Agent Id Reason for request Withdrawal Date (optional)</p> <p>Notes:</p> <ol style="list-style-type: none"> Valid reasons for requesting the Withdrawals Checklist shall be defined as (not exclusively): <ul style="list-style-type: none"> Information Final Compliance The Withdrawal Date shall optionally be included in a request, as an indication of when the 'Final Compliance' report should be run. If included, the CRA shall run the 'Final Compliance' report at 5pm, two Working Days prior to the Withdrawal Date. In this case, there is no need for the BSCCo to submit a specific request for the 'Final Compliance' report, but on the morning of the day that the report is due, the BSCCo shall confirm that the report is required. 			
Physical Interface Details:			

7.32 CRA-I047: (output) Withdrawals Checklist

Interface ID: CRA-I047	User: BSCCo Ltd	Title: Withdrawals Checklist	BSC Reference: CP974
Mechanism: Manual, by email or fax	Frequency: On request	Volumes: Low	
<p>The CRA shall issue a Withdrawals Checklist on receipt of a request from BSCCo Ltd (via Interface Requirement CRA-I044). The report shall contain the following data:</p> <p>Report Date Reason for Request</p> <p><u>Registration Details</u></p> <p style="padding-left: 20px;"><u>Participation capacities registered</u> BSC Party / BSC Party Agent Name BSC Party / BSC Party Agent Id Market Role Code(s) Effective From Date Effective To Date</p> <p style="padding-left: 20px;"><u>BM Units registered</u> BM Unit ID Effective From Date Final Effective To Date</p> <p style="padding-left: 20px;"><u>Metering Systems registered</u> MSID Effective From Date Final Effective To Date</p> <p style="padding-left: 20px;"><u>Communication Lines</u> High-grade or low-grade line Own or shared line</p>			

<p><u>FTP accounts/ Encryption keys to be terminated.</u> Access to BSC Central Systems terminated effective from <u>Report non deliveries set up for BSC Party/ BSC Party Agent</u> Flow Type Effective From Date Effective To Date</p> <p><u>Trading Details</u> Last Day of Trading Payment date of the RF run for the Last Day of Trading (if known)</p> <p><u>Settlement Details</u> As received via Interface Requirement CRA-I046</p> <p><u>Authorisation and Notification Details</u> As received via Interface Requirement CRA-I045</p>
Physical Interface Details:

7.33 ECVAA-I017: (output) ECVAA Performance Report

Interface ID: ECVAA-I017	User: BSCCo Ltd	Title: ECVAA Performance Report	BSC Reference: ECVAA SD: B ECVAA IRR: E6 CR 12, CP519
Mechanism: Manual, probably in whole or in part produced using a report-formatting tool.	Frequency: Monthly	Volumes:	
<p>Interface Requirement:</p> <p>The ECVAA Service shall issue ECVAA Performance Reports once a month to BSCCo Ltd.</p> <ul style="list-style-type: none"> • Percentage of valid new or updated registration data incorporated in ECVAA systems within 1 day of receipt • Percentage of valid new or updated credit limit data incorporated in ECVAA systems within 1 day of receipt • Percentage of Energy Contract Volume Authorisation requests processed within 1 day of receipt • Percentage of Energy Contract Volume Authorisation termination requests processed within 1 day of receipt • Percentage of Metered Volume Reallocation Authorisation requests processed within 1 day of receipt • Percentage of requests to add additional BM Unit Subsidiaries to an existing Metered Volume Reallocation Authorisation processed within 1 day of receipt • Percentage of Metered Volume Reallocation Authorisation termination requests processed within 1 day of receipt • Percentage of Energy Contract Volume Notifications processed within 15 minutes of receipt • Percentage of valid Energy Contract Volume Notifications aggregated for Settlement Day (SD) and Total Energy Contract Volumes calculated and transmitted to SAA by 12:00 on SD + 2 • Percentage of Metered Volume Reallocation Notifications processed within 15 minutes of receipt • Percentage of Metered Volume Reallocation Notifications for SD transmitted to SAA by 12:00 on SD + 2. • Percentage of Half Hourly Credit Check Processes completed within 15 minutes of gate closure. • Percentage of Credit Cover Minimum Eligible Amount Requests processed by the first Working Day after the expiry of the Waiting Period or the date of receipt of the Minimum Eligible Amount Rule Confirmation from BSCCo Ltd, whichever is the later (see ECVAA-F011: Process Credit Cover Minimum Eligible Amount Request). 			

7.34 ECVAA-I021: (output) Credit Limit Warning

This interface is defined in Part 1 of the Interface Definition and Design.

7.35 ECVAA-I023: (output) ECVAA BSC Section D Charging Data

Interface ID: ECVAA-I023	User: BSCCo Ltd	Title: ECVAA BSC Section D Charging Data	BSC Reference: CR 65, CN160
Mechanism: Electronic data file transfer	Frequency: Monthly	Volumes:	
<p>Interface Requirement:</p> <p>The system shall, on the 21st calendar day of each month, collect information required for charging BSC parties under Section D of the Code and send this to BSCCo Ltd.</p> <p>The information included shall be:</p> <p>Month Participant Id Participant Name Gross Contract Volume</p> <p>where Gross Contract Volume is</p> $\sum_{zabj} ECQ_{zabj} + \sum_{zabj} ECQ_{zabj} + \sum_{zaij} QMFR_{zaij} + \sum_{zbij} QMFR_{zbij} $ <p>Each month the information will be produced for both the previous calendar month and the month before that. Data used shall be the latest available data from Interim Run and Initial Run only.</p>			
<p>Physical Interface Details:</p>			

7.36 ECVAA-I026: (output) Minimum Eligible Amount Request

Interface ID:: ECVAA-I026	User: BSCCo Ltd	Title: Minimum Eligible Amount Request	BSC Reference: CP519, CP1313
Mechanism: Manual	Frequency: Ad hoc, as a result of receipt of Credit Cover Minimum Eligible Amount Requests	Volumes: Low	
Interface Requirement:			
<p>The ECVAA shall issue Minimum Eligible Amount Requests to BSCCo Ltd as a result of the receipt of Credit Cover Minimum Eligible Amount Requests from a BSC Party which is in Section H Default.</p> <p>The Minimum Eligible Amount Request data shall comprise:</p> <p style="padding-left: 40px;">BSC Party ID Minimum Eligible Amount Request Date</p> <p>Note: the Minimum Eligible Amount Request Date is the date of receipt of the Credit Cover Minimum Eligible Amount Request by the ECVAA.</p>			

7.37 ECVAA-I027: (input) Notification of BSC Parties in Section H Default

Interface ID:: ECVAA-I027	Source: BSCCo Ltd	Title: Notification of BSC Parties in Section H Default	BSC Reference: CP1313
Mechanism: Manual	Frequency: Ad hoc, in response to a change in the list	Volumes: Low	
Interface Requirement:			
<p>The ECVAA shall receive from BSCCo Ltd a list of all BSC Party Ids that are currently in Section H Default.</p>			

7.38 ECVAA-I032: (input) Credit Assessment Price

Interface ID:: ECVAA-I032	Source: BSCCo Ltd	Title: Credit Assessment Price	BSC Reference: P2
Mechanism: Manual	Frequency: As required	Volumes: Low	
Interface Requirement:			
The ECVAA Service shall receive the Credit Assessment Price from BSCCo from time to time.			
The Credit Assessment Price shall comprise:			
<u>Credit Assessment Price:</u>			
Credit Assessment Price (£/MWh) Effective from date			
Notes:			
The effective from date shall be the settlement date upon which the price is to take effect, and shall be no earlier than the day after the price is received by ECVAA.			
The Credit Assessment Price shall be in the range 0.00 to 999.99, and shall be held to two decimal places.			
Physical Interface Details:			

7.39 ECVAA-I040: (output) Issue Notification System Status Report

Interface ID:: ECVAA-I040	Source: BSCCo Ltd	Title: Issue Notification System Status Report	BSC Reference: CP739
Mechanism: Manual, by email, fax or telephone call.	Frequency: As required	Volumes: Low	
Interface Requirement:			
The ECVAA Service shall issue a status report to BSCCo Ltd. as soon as possible after:			
<ul style="list-style-type: none"> ▪ The start of an ECVAA System Failure or ECVAA System Withdrawal; ▪ A change in the Notification Agents affected by an existing ECVAA System Failure or ECVAA System Withdrawal; or ▪ The end of an ECVAA System Failure or ECVAA System Withdrawal. 			
The notification shall contain			
Incident Type (ECVAA System Failure or ECVAA System Withdrawal). Incident Status (Start, End or Change) Date and Time (GMT) of Incident Status Affected Agents (list of affected Notification Agents or ALL).			
Physical Interface Details:			

7.40 ECVAA-I041: Receive Party Credit Default Authorisation Details

Interface ID: ECVAA-I041	Source: BSCCo Ltd	Title: Receive Party Credit Default Authorisation Details	BSC Reference: CP975
Mechanism: Manual, by email, letter or fax	Frequency: As necessary	Volumes: approximately 10 times per year	
<p>The ECVAA shall receive, from time to time the BSC Party Credit Default Authorisation Flag from the BSCCo Ltd. The information shall contain:</p> <p><u>Authentication Details</u> Name Password</p> <p><u>BSC Party Credit Default Authorisation Details</u> BSC Party Id Credit Default Authorisation Flag Effective From Date</p>			
Physical Interface Details:			

7.41 SAA-I010: (input) BSCCo Ltd Cost Data (Redundant)

Interface ID: SAA-I010	Source: BSCCo Ltd	Title: BSCCo Ltd Cost Data	BSC Reference: SAA SD: 2.6 SAA BPM: 3.16, 4.12, CP527, CP1223
Mechanism: Electronic data file transfer	Frequency: Monthly/ Annual	Volumes:	
<p style="text-align: center;">Interface Requirement:</p> <p>The SAA Service shall receive forecast BSCCo Ltd Costs monthly and actual BSCCo Ltd Costs annually from BSCCo Ltd.</p> <p>The BSCCo Ltd Cost data shall include:</p> <p><u>Forecast Costs:</u> Settlement Date BSCCo Ltd Forecast Cost (£)</p> <p><u>Total Actual Costs:</u> Year BSCCo Ltd Actual Cost (£)</p> <p>This interface is not in use.</p>			

7.42 SAA-I012: (input, part 1) Dispute Notification

This interface is defined in Part 1 of the Interface Definition and Design.

7.43 SAA-I014 (output) Settlement Reports

There are three variants of the Settlement Report. The first variant is sent to BSC Parties and is defined in Part 1 of the IDD. The second variant is sent to the System Operator and the BMRA and is defined in section 5 of this document. The third variant is sent to BSCCo Ltd and is defined here:

Interface ID: SAA-I014	User: BSCCo Ltd	Title: Settlement Report	BSC Reference: CR_991027_06a, CP527, P8, P18A, CP597, CP610, P71, P78, P194, P217, P305
Mechanism: Electronic data file transfer	Frequency: Daily per settlement run	Volumes:	
<p>The following information is provided:</p> <p><u>Settlement Day Information</u> Settlement Date Settlement Run Type SAA Run Number SAA CDCA Settlement Run Number SVAA CDCA Settlement Date SVAA CDCA Settlement Run Number SVAA SSR Run Number BSC Party Id</p> <p>For each BSC Party:</p> <p><u>BSC Party Information</u> BSC Party Id Aggregate Party Day Charges (defined in IDD Part 1 section 8.4.1)</p> <p>For each Settlement Period:</p> <p><u>Settlement Period Information</u> Settlement Period (1-50) (j) Total Demand (sum of all negative QM_{ij}) Notional Reserve Limit (MW) (only for Settlement Dates prior to the P78 effective date) Arbitrage Flag $CADL_d$ Continuous Acceptance Duration Limit $DMAT_d$ De Minimis Acceptance Threshold System Period Data (defined in IDD Part 1 section 8.4.3)</p> <p><u>Trading Unit Period Information:</u> Trading Unit Name Total Trading Unit Metered Volume (MWh)</p> <p><u>BM Unit Period Information:</u> BM Unit ID (i) Trading Unit Name Period FPN (FPN_{ij}) (MWh) BM Unit Metered Volume (QM_{ij}) (MWh) Transmission Loss Multiplier (TLM_{ij}) BM Unit Applicable Balancing Services Volume (QAS_i) (MWh)</p>			

BM Unit Period Bid-Offer Information:

Bid-Offer Pair Number (n)
 Bid Price (PBⁿ_{ij}) (£)
 Offer Price (POⁿ_{ij}) (£)

BM Unit Period Bid-Offer Spot Points (QBOⁿ_{ij}):

Time from
 Bid-Offer Value from
 Time to
 Bid-Offer Value to

Maximum Export Limit Information:

Time From
 Level From (MW)
 Time to
 Level To (MW)

Maximum Import Limit Information:

Time From
 Level From (MW)
 Time to
 Level To (MW)

Physical Interface Details:

This is sub-flow 3 of the Settlement Report, file id S0143.

For the Interim Initial Settlement Run, the full set of data is included in the file.

For subsequent Settlement Runs, certain information is only included if it has been changed: this applies to the Maximum Export Limit Information, (MEL), Minimum Export Limit Information (MIL), and BM Unit Period Bid-Offer Spot Points (BO2). BM Unit Period Bid-Offer Information (BBO) is only included where there are changes (to prices or to underlying BM Unit Period Bid-Offer Spot Points (BO2)).

For BO2 it is possible that the change being reported is that the record has been deleted; this is indicated by reporting nulls, e.g.

where there had been a record

BO2|10|123456.789|20|123456.789|

deletion of this record would be shown by

BO2|10||20||

Note:

SAA CDCA Settlement Run Number

Identifies the CDCA run which generated volumes used directly by SAA in the settlement calculations

For all settlement runs, other than Interim Initial for Settlement Dates prior to the P253 effective date:

SVAA CDCA Settlement Date**SVAA CDCA Settlement Run Number**

Identify the CDCA run for Settlement Date which generated the GSP Group Take volumes which were allocated by the SVAA

SVAA SSR Run Number

Identifies the SVAA Run for Settlement Date which generated the SVA BM Unit volumes

For Interim Initial Settlement Runs for Settlement Dates prior to the P253 effective date:

SVAA CDCA Settlement Date

SVAA SSR Run Number

Identify the Settlement Date and Initial Settlement (SF) SVAA Run from which SVA volumes are derived

SVAA CDCA Run Number

Will be zero

7.44 SAA-I016: (output, part 1) Settlement Calendar

This interface is defined in Part 1 of the Interface Definition and Design.

7.45 SAA-I018: (output, part 1) Dispute Report

This interface is defined in Part 1 of the Interface Definition and Design.

7.46 SAA-I019: (output) BSC Party Performance Reports (Redundant)

Interface ID: SAA-I019	User: BSCCo Ltd	Title: BSC Party Performance Reports	BSC Reference: SAA IRR: SAA6, CP1222
Mechanism: Electronic data file transfer	Frequency: Monthly	Volumes:	

Interface Requirement:

The SAA Service shall issue BSC Party Performance Reports once a month to BSCCo Ltd.

The BSC Party Performance Reports shall include:

- BSC Party rankings by number/volume of trades
- BSC Party rankings by imbalance volumes

Ranking will be as follows:

Ranking by Number of Trades, then by Volume (ie if two parties have the same number of trades, then their relative ranking will be established using volume of trades).

Ranking by Energy Imbalance, then by Information Imbalance (ie if two parties have the same energy imbalance, then their relative ranking will be established using information imbalance). Note that the Imbalance Volumes flow for this report contains only a single value for imbalance volume.

This interface is not in use.

7.47 SAA-I020: (output) SAA Performance Reports

Interface ID: SAA-I020	User: BSCCo Ltd	Title: SAA Performance Reports	BSC Reference: SAA SD: B, CP527, P78
Mechanism: Manual, probably in whole or in part produced using a report-formatting tool.	Frequency: Monthly	Volumes:	
Interface Requirement:			
<p>The SAA Service shall issue SAA Performance Reports once a month to BSCCo Ltd.</p> <p>The SAA Performance Reports shall include:</p> <p><u>Settlement Run Reporting:</u> Month Ending Date Settlement Date Report Run Type Report Recipient Expected Settlement Report Date Settlement Run Date/Time Actual Settlement Report Date/Time</p> <p><u>Settlement Calendar Publishing:</u> Settlement Calendar Year Expected Publish Date Actual Publish Date</p> <p><u>BM Unit Credit Assessment Import Capability Reporting:</u> Month Ending Date Reason (Month End/CALF Change) Report Recipient Expected Report Date Actual Report Date</p> <p><u>Help Desk Reporting:</u> Call Severity Level Response Time</p> <p>Market Index Data Provider Performance: Month Ending Date Market Index Data Provider Identifier Number of Settlement Days for which Market Index Data was not provided in time for the Initial Interim Settlement Run Number of Settlement Periods where individual Liquidity Threshold required default by SAA Number of Settlement Periods where zeroes were used in the Initial Interim Settlement Calculation</p>			

7.48 SAA-I023: (input) System Parameters

Interface ID:: SAA-I023	Status: Mandatory	Title: System Parameters	BSC Reference: CR 003, P10, P18A, CP632, P194, P217, P305
Mechanism: Manual	Frequency: Ad-hoc	Volumes: Low – typically one or two per month	
Interface Requirement: The SAA Service shall receive the following system parameters from the BSCCo Ltd via a manual interface, expected to be either a fax or telephone call: Effective from Settlement Date Effective from Settlement Period (1-50) Effective to Settlement Date Effective to Settlement Period (1-50) Information Imbalance Price 1 Information Imbalance Price 2 Arbitrage Flag NRL _j (Notional Reserve Limit) (MW) DMAT _d (De Minimis Acceptance Threshold) (MWh) CADL _d (Continuous Acceptance Duration Limit (minutes) PAR _d (Price Average Reference Volume) (MWh) (0-9,999,999,999) RPAR _d (Replacement Price Average Reference Volume) (MWh) VoLL (Value of Lost Load)			
Physical Interface Details:			
The BSCCo Ltd system parameter values shall continue to apply to all settlement periods, until a change to a parameter is made.			
Issues:			

7.49 SAA-I025: (output) SAA BSC Section D Charging Data

Interface ID: SAA-I025	User: BSCCo Ltd	Title: SAA BSC Section D Charging Data	BSC Reference: CR 65, CN160
Mechanism: Electronic data file transfer	Frequency: Monthly	Volumes:	
Interface Requirement: The system shall, on the 15 th working day of each month, collect information required for charging BSC parties under Section D of the Code and send this to BSCCo Ltd. The information included shall be: Month Participant Id Participant Name Production/Consumption Flag			

Volume
<p>where Volume is Credited Energy Volume for the Production/Consumption Energy Account belonging to the BSC Party.</p> <p>Each month the information will be produced for both the previous calendar month and the month before that. Data used shall be the latest available data from Interim Run and Initial Run only.</p>
Physical Interface Details:

7.50 SAA-I027: (output) Report pre-settlement run validation failure

Interface ID: SAA-I027	Source: SAA	Title: Report pre-settlement run validation failure	BSC Reference: CP639, CP1222
Mechanism: Manual	Frequency: Ad-hoc	Volumes: As required.	
Interface Requirement: The SAA shall send to BSCCo details of pre-settlement run validation failures. The content of the report shall include Settlement Date Settlement Run Type Failure Reasons			
Physical Interface Details: This interface is likely to take the form of a fax or an e-mail or a telephone call. Failure Reasons will be various.			
Issues:			

7.51 SAA-I028: (input) Receive settlement run decision

Interface ID: SAA-I028	Source: BSCCo	Title: Receive settlement run decision	BSC Reference: CP639
Mechanism: Manual	Frequency: In response to SAA-I027	Volumes: Low – typically one or two per month	
Interface Requirement: BSCCo shall send to the SAA a decision on whether a settlement run should continue if the SAA has reported pre-settlement run validation run failures (SAA-I027) for this run. Settlement Date Settlement Run Type Decision			

Interface ID: SAA-I028	Source: BSCCo	Title: Receive settlement run decision	BSC Reference: CP639
Physical Interface Details:			
This interface is likely to take the form of a fax or an e-mail or a telephone call. Failure Reasons will be various.			
Issues:			

7.52 SAA-I029: (input) Receive settlement run instructions

Interface ID: SAA-I029	Source: BSCCo	Title: Receive settlement run instructions	BSC Reference: CP639
Mechanism: Manual	Frequency: In response to SAA-I027	Volumes: Low – typically one or two per month	
Interface Requirement: BSCCo shall send to the SAA instructions on how to progress a settlement run that the SAA has reported pre-settlement run validation run failures (SAA-I027) for. Settlement Date Settlement Run Type Instructions			
Physical Interface Details:			
This interface is likely to take the form of a fax or an e-mail or a telephone call. Failure Reasons will be various.			
Issues:			

7.53 SAA-I031: (input) Receive Market Index Data Provider Thresholds

Interface ID: SAA-I031	Source: BSCCo	Title: Receive Market Index Data Provider Thresholds	BSC Reference: P78
Mechanism: Manual	Frequency: Ad-hoc	Volumes: This manual flow is expected to handle a maximum of 6 date ranges to be defined, for each DP, for each year. Each date range to have a maximum of 4 different Liquidity Thresholds.	
Interface Requirement:			
<p>The SAA shall receive Market Index Data Provider Liquidity Threshold data from BSCCo. The processing rules for this flow are described in SAA-F023.</p> <p>The flow shall include:</p> <ul style="list-style-type: none"> Market Index Data Provider Identifier MIDP Date Range Action Type Effective From Settlement Date Effective To Settlement Date MIDP Period Data Effective From Settlement Period (1-50) Effective To Settlement Period (1-50) Liquidity Threshold <p>Action Type describes the type of operation to be performed in relation to the data supplied in the other fields. It can be one of:</p> <ul style="list-style-type: none"> • Insert; • Update; • Delete. 			
Physical Interface Details:			
Issues:			

7.54 SAA-I032: (output) Report Market Index Data Provider Thresholds

Interface ID: SAA-I032	User: BSCCo	Title: Report Market Index Data Provider Thresholds	BSC Reference: P78
Mechanism: Manual	Frequency: In response to SAA-I031, as described in SAA-F023	Volumes: This manual flow is expected to handle a maximum of 6 date ranges to be defined, for each DP, for each year. Each date range to have a maximum of 4 different Liquidity Thresholds.	
Interface Requirement:			
The SAA shall report Market Index Data Provider Liquidity Threshold to BSCCo. The flow shall include: Market Index Data Provider Identifier MIDP Date Range Effective From Settlement Date Effective To Settlement Date MIDP Period Data Effective From Settlement Period (1-50) Effective To Settlement Period (1-50) Liquidity Threshold			
Physical Interface Details:			
Issues:			

7.55 SAA-I034: (output) Report Recommended Data Change

Interface ID: SAA-I034	User: BSCCo	Title: Report Recommended Data Change	BSC Reference: CP995, CP1283
Mechanism: Manual	Frequency: In response to SAA-I033 for an Emergency Instruction	Volumes: Low	
Interface Requirement:			
The SAA will report to the BSCCo and recommend a course of action with regards to a request for data change received from the System Operator (via SAA-I033) where the request is marked as an Emergency Instruction.			
Non Functional Requirement:			
Issues:			

7.56 SAA-I035: (input) Receive Instruction for Data Change

Interface ID: SAA-I035	Source: BSCCo	Title: Receive Instruction for Data Change	BSC Reference: CP995, CP1283
Mechanism: Manual	Frequency: In response to SAA-I034	Volumes: Low	
Interface Requirement: In response to SAA-I034 for an Emergency Instruction, BSCCo shall send to the SAA instructions for a data change.			
Non Functional Requirement:			
Issues:			

7.57 SAA-I036: (output) Report Confirmation of Data Change

Interface ID: SAA-I036	User: BSCCo, System Operator	Title: Report Confirmation of Data Change	BSC Reference: CP995, CP1283
Mechanism: Manual	Frequency: In response to SAA- I035 for an Emergency Instruction or In response to SAA- I033 for a non- Emergency Instruction	Volumes: Low	
Interface Requirement: The SAA shall report to BSCCo and the System Operator confirmation of the completion of an instructed data change (received via SAA-I035) for an Emergency Instruction or via SAA-I033 for a non-Emergency Instruction).			
Non Functional Requirement:			
Issues:			

7.58 SAA- I038: (input) Receive Excluded Emergency Acceptance Pricing Information

Interface ID: SAA-I038	Source: BSCCo	Title: Receive Excluded Emergency Acceptance Pricing Information	BSC Reference: P172
Mechanism: Manual	Frequency: Ad-hoc	Volumes: Low	
Interface Requirement: The BSCCo shall send to the SAA recalculated Energy Imbalance Prices resulting from Excluded Emergency Acceptances prior to each subsequent Settlement Run. The following data items will be included in the communication: Settlement Day Settlement Period Buy Price Sell Price Settlement Run Type that was used to calculate the new Energy Imbalance Prices.			
Non Functional Requirement:			
Issues:			

7.59 SAA-I039: (output) Send Excluded Emergency Acceptance Dry Run Results

Interface ID: SAA-I039	User: SAA	Title: Send Excluded Emergency Acceptance Dry Run Results	BSC Reference: P172
Mechanism: Manual	Frequency: Ad-hoc	Volumes: Low	
Interface Requirement: The SAA shall, as a result of any additional 'dry run' carried out in response to Excluded Emergency Acceptances received, send to the BSCCo confirmation of whether SAA has matched the prices within the defined threshold. The confirmation will be in the form of a Y/N flag.			
Non Functional Requirement:			
Issues:			

7.60 SAA- I040: (input) Receive Authorisation To Proceed With Full Settlement Run

Interface ID: SAA-I040	Source: BSCCo	Title: Receive Authorisation To Proceed With Full Settlement Run	BSC Reference: P172
Mechanism: Manual	Frequency: Ad-hoc	Volumes: Low	
Interface Requirement: The BSCCo shall send to the SAA authorisation to proceed with the full Settlement Run.			
Non Functional Requirement:			
Issues:			

7.61 ECVAA-I049: (input) Request to remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default

Interface ID: ECVAA-I049	Source: BSCCo Ltd	Title: Request to remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default	BSC Reference: CP1140 CP1169
Mechanism: Manual, by email.	Frequency: As required	Volumes: Low	
Interface Requirement: The ECVAA shall receive, from time to time request to remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default, which shall contain:			
<ol style="list-style-type: none"> 1. Party ID 2. Removal effective from Date 3. Removal effective from Period 4. Copy of the BSC Panel resolution 5. Any notes pertinent to this removal 			
Physical Interface Details:			

7.62 ECVAA-I050: (output) Remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default Feedback.

Interface ID:: ECVAA-I050	User: BSCCo Ltd	Title: Remove all ECVNs and MVRNs from ECVAA for a Party in Section H Default feedback	BSC Reference: CP1140 CP1169
Mechanism: Manual, by email.	Frequency: As required	Volumes: Low	
Interface Requirement: The ECVAA shall issue feedback to BSCCo Ltd following the <u>receipt of a request to remove all ECVNs and MVRNs for a Party in Section H default</u> , which shall contain: <ol style="list-style-type: none"> 1. Party ID 2. Removal effective from Date 3. Removal effective from Period 4. Any notes pertinent to this removal 			
Physical Interface Details: The ECVAA-I050 shall be used on the following occasions: Where the dis-application is to commence from Period 1: <ol style="list-style-type: none"> 1. To confirm receipt of the ECVAA-I049. 2. To confirm that all Notifications have been removed and all Authorisations terminated for the defaulting Party, 3. To confirm that the Credit Check has been restarted. 4. To confirm that the final check has been completed. Where the dis-application is to commence from any period other than Period 1: <ol style="list-style-type: none"> 1. To confirm receipt of the ECVAA-I049. 2. To confirm that all Notifications have been removed from the next settlement day and all Authorisations terminated for the defaulting Party, 3. To confirm that the Credit Check has been restarted. 4. To confirm that the Volume Nullification process is completed. An update on the progress of each Volume Notification Nullification will be sent every working day if this process takes more than one working day. 5. To confirm that the final check has been completed. Note: additional informal communications may occur between the ECVAA and BSCCo by email and/or telephone as individual circumstances dictate.			

7.63 BMRA-I033: (Input) STOR Availability Window

Interface ID:: BMRA-I033	Source: BSCCo Ltd	Title: STOR Availability Window	BSC Reference: P305
Mechanism: Manual, by email.	Frequency: As required	Volumes: Low	
Interface Requirement: The BSCCo will provide the BMRA and SAA with details of STOR Availability Windows. The following details will be provided: <ul style="list-style-type: none"> Document ID Season Year Season Number STOR Availability Dates Weekday Start Time Weekday End Time Non-weekday Start Time Non-weekday End Time 			
Physical Interface Details: BSCCo will send details in CSV format.			

DRAFT

7.64 SAA-I046: (Input) STOR Availability Window

SAA receives input file from BSCCo using same format as BMRA-I033.

DRAFT

7.67 SAA-I047 (input) BSCCo Calculated SBR Imbalance Price

Interface ID: SAA-I047	Source: BSCCo	Title: BSCCo Calculated SBR Imbalance Price	BSC Reference: P323
Mechanism: Manual	Frequency: As required	Volumes: Low	
Interface Requirement: Where the BSCCo has been notified by the Transmission Company of any BOAs that are the subject of an SBR Notice, the BSCCo shall send to the SAA the calculated Energy Imbalance Price that is expected to reflect the value of the SBR Actions taken. The following data items will be included in the communication: <ul style="list-style-type: none"> • Settlement Date(s) • Settlement Period(s) • BSCCo calculated price(s) 			
Non Functional Requirement:			
Issues:			

DRAFT

7.68 SAA-I048 (output) SBR Imbalance Price Discrepancy Notice

Interface ID: SAA-I048	Source: SAA	Title: SBR Imbalance Price Discrepancy Notice	BSC Reference: P323
Mechanism: Manual	Frequency: As required	Volumes: Low	
Interface Requirement: Where the SAA has received from the BSCCo the calculated SBR energy imbalance price, the SAA shall send to the BSCCo any discrepancy between the calculated SBR energy imbalance price and the System Buy Price(s) produced by Central Systems for the relevant settlement period(s). And where there is no discrepancy SAA shall notify BSCCo there is no discrepancy. The following data items will be included in the communication: <ul style="list-style-type: none"> • Settlement Date(s) • Settlement Period(s) • Discrepancy (Y/N) • SAA SBP • BSCCo SBP • Difference 			
Non Functional Requirement:			
Issues:			

8 Interfaces From and To Stage 2

The physical formats of these files are defined in the SVA Data Catalogue and in the spreadsheet attached to this document. The definition in the SVA Data Catalogue is the master.

8.1 CDCA-I043: (output) GSP Group Take to SVAA

Interface ID: CDCA-I043	User: SVAA	Title: GSP Group Take to SVAA	BSC Reference: CDCA SD 22, 23.1, A, B CDCA BPM 4.13, CP593
Mechanism: Electronic data file transfer, Pool Transfer File Format	Frequency: Daily, for those Settlement Dates for which a CDCA run (excluding any Interim Initial runs for Settlement Dates prior to the P253 effective date) has taken place that day.	Volumes:	
Interface Requirement:			
<p>CDCA provides aggregated meter flow volumes for the GSP Groups to SVAA.</p> <p>The physical form of this interface is the existing GSP Group Take file sent from the SSA system to ISRA.</p> <p>One file per GSP Group, containing GSP Group Take Volumes produced by a CDCA Run (excluding any Interim Initial runs for Settlement Dates prior to the P253 effective date) for each Settlement Period of a Settlement Date.</p> <p>There are fields in the existing flow which are meaningless under the BSC, for which dummy or null values are provided. These fields are called Fillers in the physical flow.</p>			
Physical Interface Details:			
See the physical flow for details, in the Stage 2 tab of the IDD Part 2 spreadsheet.			
ZHD Header information:			
File Identifier	same as unique Id part of file name		
File Type	='P0012001'		
From Stage2 Role Code	='S'		
From Stage2 Participant Id	= Id allocated to CDCA by Stage 2		
To Stage2 Role Code	='G'		
To Stage2 Participant Id	='CAPG'		
Creation Time			
Sending Application Id	=NULL		
Receiving Application Id	=NULL		
Broadcast	=NULL		
Test Data Flag	indicates whether this is live data or test data		

8.2 CRA-I004: Agent Details

This interface is defined in Section 4. (SVAA registers itself with CRA.)

8.3 SAA-I007: (input) BM Unit Allocated Demand Volume

Interface ID: SAA-I007	Source: SVAA	Title: Allocated Supplier Volumes	BSC Reference: RETA SCH: 4, B, 2.4.1 SAA SD: 2.5, A1 SAA BPM: 3.4, 4.42, CP632
Mechanism: Electronic data file transfer, Pool Transfer File Format	Frequency: Daily, for each run the SVAA has done that day.	Volumes:	
Interface Requirement:			
The SAA Service shall receive BM Unit Allocated Demand Volume once a day from the SVAA.			
The BM Unit Allocated Demand Volume data shall include:			
<ul style="list-style-type: none"> Supplier ID GSP Group ID BM Unit ID CDCA Settlement Date CDCA Run Number SVAA SSR Settlement Date SVAA SSR Run Number Settlement Period (1-50) Energy Volume Reading (MWh) (signed, consumption positive) 			
Physical Interface Details:			
See the physical flow for details, in the Stage 2 tab of the IDD Part 2 spreadsheet.			
ZHD Header information:			
File Identifier	same as unique Id part of file name		
File Type	='P0182001'		
From Stage2 Role Code	='G'		
From Stage2 Participant Id	='CAPG'		
To Stage2 Role Code	='F'		
To Stage2 Participant Id	= Id allocated to CDCA by Stage 2		
Creation Time			
Sending Application Id	=NULL		
Receiving Application Id	=NULL		
Broadcast	=NULL		
Test Data Flag	indicates whether this is live data or test data		

8.4 SAA-I016: (output, part 1) Settlement Calendar

This interface is defined in Part 1 of the Interface Definition and Design.

8.5 SAA-I017: (output, common) SAA Data Exception Report

This interface is defined in Part 1 of the Interface Definition and Design.

8.6 CRA-I015: (output) BM Unit Registration Data

This interface is defined in Section 4 (sub-flow 2 in the physical flow definition is specifically for the Stage 2 MDDA).

Physical Interface Details: See the physical flow for details, in the Stage 2 tab of the IDD Part 2 spreadsheet.	
ZHD Header information:	
File Identifier	same as unique Id part of file name
File Type	= 'P0181001'
From Stage2 Role Code	= 'Z'
From Stage2 Participant Id	= Id allocated to CDCA by Stage 2
To Stage2 Role Code	= 'U'
To Stage2 Participant Id	= 'CAPG'
Creation Time	
Sending Application Id	= NULL
Receiving Application Id	= NULL
Broadcast	= NULL
Test Data Flag	indicates whether this is live data or test data

8.7 BMRA-I032: (output) Demand Control Instructions to SVAA

Interface ID: BMRA-I032	User: SVAA	Title: Demand Control Instructions to SVAA	BSC Reference: P305
Mechanism: Electronic data file transfer, Pool Transfer File Format	Frequency: As made available by the SO	Volumes: Low	
Interface Requirement:			
The BMRA provides details of Demand Control Instructions to the SVAA as and when they are made available by the System Operator via BMRA-I002			
The Demand Control Instruction data shall include:			
<ul style="list-style-type: none"> Demand Control Event ID Instruction Sequence Number Demand Control Event flag Start Date and Time End Date and Time Volume SO Flag Amendment Flag 			
Physical Interface Details: See the physical flow for details, in the Stage 2 tab of the IDD Part 2 spreadsheet.			

8.8 SAA-I045: (input) BM Unit Allocated Demand Disconnection Volume

Interface ID: SAA-I045	Source: SVAA	Title: Allocated Supplier Volumes	BSC Reference: P305
Mechanism: Electronic data file transfer, Pool Transfer File Format	Frequency: For SF run and all subsequent runs the SVAA has done that day where Demand Control was required	Volumes: Low	
Interface Requirement:			
<p>The SAA Service shall receive from the SVAA, BM Unit Allocated Demand Disconnection Volume for each Settlement Day affected by a Demand Control event.</p> <p>The BM Unit Allocated Demand Disconnection Volume data shall include:</p> <ul style="list-style-type: none"> Supplier ID GSP Group ID BM Unit ID CDCA Settlement Date CDCA Run Number SVAA SSR Settlement Date SVAA SSR Run Number Settlement Period (1-50) Disconnected Energy Volume Reading (MWh) (+ve = consumption) 			
Physical Interface Details:			
See the physical flow for details, in the Stage 2 tab of the IDD Part 2 spreadsheet.			
ZHD Header information:			
File Identifier	same as unique Id part of file name		
File Type	='P0237'		
From Stage2 Role Code	='G'		
From Stage2 Participant Id	='CAPG'		
To Stage2 Role Code	='F'		
To Stage2 Participant Id	= Id allocated to CDCA by Stage 2		
Creation Time			
Sending Application Id	=NULL		
Receiving Application Id	=NULL		
Broadcast	=NULL		
Test Data Flag	indicates whether this is live data or test data		

9 Interfaces Within BSC Central Systems

9.1 BMRA-I001 (input): Registration Data

See CRA-I013 and CRA-I015 in section 4.

9.2 BMRA-I007 (output) SAA/ECVAA Balancing Mechanism Data

Interface IDs: From: BMRA-I007 To: SAA-I003 To: ECVAA-I048	User: SAA, ECVAA	SAA/ECVAA Balancing Mechanism Data	BSC Reference: RETA SCH: 4, B, 2.4.1 SAA SD: 2.1, A1, ITT Query Response Ref R-031 SAA BPM: 3.3, 4.3, 4.4, 4.17, 4.18, P71, P140, P217, P305
Mechanism: BMRA stores the files it receives from the SO in a directory readable by SAA and ECVAA.	Frequency: As required for SAA and ECVAA.	Volumes: Between 1000 - 5000 BM units*. In each settlement period, at least 1 FPN data and 1 Bid-Offer Acceptance per BM unit. At most 10 Bid-Offer Pairs per BM unit (estimated 1000) that receives bids and offers.	
<p>Interface Requirement:</p> <p>The BMRA Service shall copy all Balancing Mechanism data that was received from the SO on settlement day N to a directory that is readable by SAA. The SAA shall load the data in time for the first (Interim) settlement run for settlement day N. . Physical Notification data shall additionally be copied to a directory readable by the ECVAA.</p> <p>* N.B. Only Physical Notification data will be read by ECVAA.</p> <p>Balancing mechanism data shall include all data listed in BMRA-I002 that was received from the SO, i.e:</p> <ul style="list-style-type: none"> Physical Notification (PN) Quiescent PN (QPN) Bid-Offer Data (BOD) Applicable Balancing Services Volume (QAS) Maximum Export Limit (MEL) Maximum Import Limit (MIL) Run Up Rates Export (RURE) Run Up Rates Import (RURI) Run Down Rates Export (RDRE) Run Down Rates Import (RDRI) Notice to Deviate from Zero (NDZ) Notice to Deliver Offers (NTO) Notice to Deliver Bids (NTB) Minimum Zero Time (MZT) Minimum Non-Zero Time (MNZT) Stable Export Limit (SEL) Stable Import Limit (SIL) Maximum Delivery Volume (MDV) Maximum Delivery Period (MDP) <p>For Settlement Dates prior to the P217 effective date this flow shall also include:</p> <ul style="list-style-type: none"> Bid-Offer Acceptance Level (BOAL) <p>For Settlement Dates after and including the P217 effective date this flow shall also include:</p> <ul style="list-style-type: none"> Bid-Offer Acceptance Level Flagged (BOALF) <p>For Settlement Dates after and including the P305 effective date this flow shall also include:</p> <ul style="list-style-type: none"> Demand Control Instructions Loss of Load Probability and De-rated Margin Data STOR Availability Window 			

Interface IDs: From: BMRA-I007 To: SAA-I003 To: ECVAA-I048	User: SAA, ECVAA	SAA/ECVAA Balancing Mechanism Data	BSC Reference: RETA SCH: 4, B, 2.4.1 SAA SD: 2.1, A1, ITT Query Response Ref R-031 SAA BPM: 3.3, 4.3, 4.4, 4.17, 4.18, P71, P140, P217, P305
Physical Interface Details:			

9.3 BMRA-I010: (output, common) Data Exception Reports

This interface is defined in Part 1 of the Interface Definition and Design.

9.4 BMRA-I018: (input) Publish Credit Default Report

See ECVAA-I036 in this section.

9.5 CDCA-I002: (input) Registration Data

See CRA-I019 in this section.

9.6 CDCA-I016: (input) Information from TAA

Interface ID: CDCA-I016	Source: TAA	Title: Request for Metering System details	BSC Reference: TAA SD 3.2.3
Mechanism: Manual	Frequency: Quarterly	Volumes: 1	
Interface Requirement:			
<p>The TAA shall request from the CDCA the following details for each Metering Systems identified by the BSCCo Ltd as being in the Sampled category: This information shall be used by the TAA to ensure that a fair sample is selected, and to ensure that any selection guidance given by the BSCCo Ltd can be followed.</p> <ul style="list-style-type: none"> • Relevant BSC Party • Meter Operator Agent • Metering Equipment technical details • Applicable Code of Practice • GSP and/or GSP Group 			

9.7 CDCA-I020: (input) Site Visit Inspection Report

Interface ID: CDCA-I020	Source: CDCA Site Visit Agent	Title: Site Visit Inspection Report	BSC Reference: CDCA SD 13.1- 13.7, CP753, CP756, P190
Mechanism: Manual, by email, letter or fax	Frequency: Ad hoc	Volumes: 50 per month	
Interface Requirement:			
On completion of the site inspection, the Site Visit Agent will provide a written report to CDCA detailing the outcome of the site inspection including, but not limited to meter readings.			
Physical Interface Details:			

9.8 CDCA-I027: (output) Aggregated Interconnector Meter Flow Volumes

Interface ID: From: CDCA-I027 To: SAA-I004	User: SAA	Title: Aggregated Interconnector Meter Flow Volumes	BSC Reference: CDCA SD 22, 23.1, A, B CDCA BPM 4.15, CP527
Mechanism: via shared database	Frequency: Daily	Volumes: Initially 96 (2 interconnectors * 48 readings). The number of interconnectors is expected to increase to 5 or 6.	
Interface Requirement:			
Aggregated meter flow volumes for the Interconnectors are sent to SAA, as follows for each Interconnector:			
Interconnector Identifier Settlement Date Settlement Period Estimate Indicator Date of aggregation Meter Volume CDCA Run Number Import/Export indicator (I/E)			
The Import/Export indicator indicates the direction of the energy flow: the Meter Volume is therefore unsigned.			
Physical Interface Details:			

9.9 CDCA-I028: (output) Aggregated BM Unit Meter Flow Volumes

Interface ID: From:CDCA-I028 To: SAA-I004	User: SAA	Title: Aggregated BM Unit Meter Flow Volumes	BSC Reference: CDCA SD 22, 23.1, A, B CDCA BPM 4.9, CP527
Mechanism: via shared database	Frequency: Daily	Volumes:	
Interface Requirement:			
Aggregated meter flow volumes for the BM Units are sent to SAA, as follows for each BM Unit: BM Unit Identifier Settlement Date Settlement Period Estimate Indicator Date of aggregation Meter Volume CDCA Run Number Import/Export indicator (I/E) The Import/Export indicator indicates the direction of the energy flow: the Meter Volume is therefore unsigned.			
Physical Interface Details:			

9.10 CDCA-I034:Settlement Calendar

This interface is defined in Part One as SAA-I016.

9.11 CDCA-I035: (input) Site Visit Report on Aggregation Rule Compliance

Interface ID: CDCA-I035	User: CDCA Site Visit Agent	Title: Site Visit Report on Aggregation Rule Compliance	BSC Reference: CDCA SD 22.4, CP756
Mechanism: Manual, by email, letter or fax	Frequency:	Volumes: Currently 12 GSP Groups in England & Wales	
Interface Requirement:			
A report from the site visit agent, after undertaking (where necessary) a site visit to verify the validity of the aggregation rules.			
Physical Interface Details:			

9.12 CDCA-I036: (output) GSP Group Take to SAA

Interface ID: From: CDCA-I036 To: SAA-I004	User: SAA	Title: GSP Group Take to SAA	BSC Reference: CDCA SD 22, 23.1, A, B CDCA BPM 4.13, CP527
Mechanism: via shared database	Frequency: Daily	Volumes: Currently 12 GSP Groups in England & Wales	
Interface Requirement:			
<p>CDCA provides aggregated meter flow volumes for the GSP Groups to SAA, as follows for each GSP Group:</p> <p>GSP Group Id Settlement Date Settlement Period Estimate Indicator Date of aggregation Meter Volume CDCA Run Number Import/Export indicator (I/E)</p> <p>The Import/Export indicator indicates the direction of the energy flow: the Meter Volume is therefore unsigned.</p>			
Physical Interface Details:			

9.13 CDCA-I039: (output) Information to TAA

Interface ID: From: CDCA-I039 To: TAA	User: TAA	Title: Information to TAA.	BSC Reference: CDCA SD 11.6 BPM
Mechanism: Manual	Frequency: As required	Volumes: estimate 10 per day (0.2% of 5000)	
Interface Requirement:			
<p>The CDCA carry out site inspections and liaise with the Technical Assurance Agent (TAA) as necessary.</p> <p>The CDCA sends the TAA the following Metering System details for all Metering Systems in the Sampled category.</p> <ul style="list-style-type: none"> • Relevant BSC Party • Meter Operator Agent • Metering Equipment technical details • Applicable Code of Practice • GSP and/or GSP Group 			
Physical Interface Details:			

9.14 CDCA-I050: (input) Data Exception Reports

This interface is defined in Part One as SAA-I017.

9.15 CDCA-I066: (input) Demand Control Instructions to CDCA

See SAA-I043 in this section.

9.16 CDCA-I068: (output) Period BM Unit Demand Disconnection Volumes

Interface ID: From: CDCA-I068 To: SAA-I044	User: SAA	Title: Aggregated BM Unit Meter Flow Volumes	BSC Reference: CDCA SD 19, P305
Mechanism: via shared database	Frequency: As required	Volumes: Low	
Interface Requirement: Aggregated estimates of disconnected meter volumes for the BM Units are sent to SAA, as follows for each BM Unit: BM Unit Identifier Settlement Date Settlement Period Disconnection Meter Volume			
Physical Interface Details:			

9.17 CRA-I010

This interface is redundant.

9.18 CRA-I013: (output, common) Issue Authentication Report

This interface is defined in Section 4.

9.19 CRA-I015: (output, common) BM Unit and Energy Account Registration Data

This interface is defined in Section 4.

9.20 CRA-I017 (output): Credit Assessment Capability

Interface ID: From: CRA-I017 To: ECVAA-I001 To: SAA-I002	User: ECVAA, SAA	Title: Credit Assessment Capability	BSC Reference: SAA SD: 2.7, A1 SAA BPM: 3.1, CRA 7.2.2
Mechanism: Via shared database with SAA and electronic data file transfer to ECVAA	Frequency: Monthly or Ad- hoc	Volumes:	

Interface Requirement:

The CRA Service shall issue the Credit Assessment to the SAA and ECVAA Services from time to time. The report shall contain:

Credit Assessment Details

BM Unit ID

Working Day BM Unit Credit Assessment Export Capability (WDBMCAEC)~~Non- Working Day~~ BM Unit Credit Assessment Export Capability (~~NWDBMCAEC~~)Working Day BM Unit Credit Assessment Import Capability (WDBMCAIC)~~Non- Working Day~~ BM Unit Credit Assessment Import Capability (~~NWDBMCAIC~~)

Effective From Date

Effective To Date

Physical Interface Details:

DRAFT

9.21 CRA-I019: (output) Registration Data

Interface ID: From: CRA-I019 To: CDCA-I002	User: CDCA	Title: Registration Data	BSC Reference: CDCA SD: 4.6-4.14, A CDCA BPM 4.16, P100, P197, P215
Mechanism: Via shared database	Frequency: Daily	Volumes: Low	
Interface Requirement:			
<p>Interface Requirement:</p> <p>The CRA Service shall issue to the CDCA the registered meter data required by that system. This will contain:</p> <p>Note: Certification /Accreditation refers to Qualification.</p> <p><u>BSC Party Details</u> BSC Party Name BSC Party ID</p> <p><u>Party Role Details</u> BSC Party Type Registration Effective From Date Registration Effective To Date</p> <p><u>Role Address Details</u> Address Telephone No Fax No e-mail Address</p> <p><u>Settlement Report Details</u> Report Type Distribution Method</p> <p><u>Authentication Details</u> Name Password</p> <p><u>Authorised Signatories</u> Name Password Contact Phone No e-mail Address</p> <p><u>Authorisation Levels</u> Activity Effective From Date Effective To Date</p> <p><u>Interconnector Administrator Details</u> Interconnector Administrator Name Interconnector Administrator ID Interconnector ID GSP Group ID (optional) Registration Effective From Date Registration Effective To Date</p> <p><u>Contact Details</u> Name Telephone No Fax No e-mail Address Effective From Date Effective To Date</p>			

Meter Operator Agent Details

Meter Operation Agent Name
Meter Operation Agent Identifier
Registration Effective From Date
Registration Effective To Date

Role Address Details

Address
Telephone No
Fax No
e-mail Address

Authorised Signatories

Name
Password
Contact Phone No
e-mail Address

Authorisation Levels

Activity
Effective From Date
Effective To Date

Certification/Accreditation Details

Certification/Accreditation Status

Metering System Registration Details

Metering System Identifier
BSC Party ID
Meter Operator Agent ID
Effective From Date
Effective To Date

Boundary Point Details

Boundary Point ID
Boundary Point Type
Effective From Date
Effective To Date

BM Unit Registration Details

BM Unit Name
BM Unit ID
BM Unit Type
NGC BM Unit Name
GSP Group ID
Trading Unit Name
Lead Party Identifier
Generation Capacity (MW)
Demand Capacity (MW)
Production / Consumption Flag
Exempt Export Flag
Base TU Flag
Transmission Loss Factor
FPN flag
Credit Qualifying Status
Interconnector ID
Effective From Date
Effective To Date

Interconnector Registration Details

Name
Additional Details
Interconnector ID
Effective From Date
Effective To Date

<p><u>GSP Group Registration Details</u></p> <p>GSP Group Registrant (ie the responsible distribution business) GSP Group ID GSP Group Name</p> <p><u>GSP Details</u></p> <p>GSP ID Effective From Date Effective To Date</p>
Physical Interface Details:

9.22 CRA-I022: (output) Metering System Details

Interface ID:: From: CRA-I022 To: TAA	User: TAA	Title: Metering System Details	BSC Reference: CRA SD 10.3
Mechanism: Manual	Frequency: On Request	Volumes: Low	
Interface Requirement:			
<p>The CRA system shall issue a report on the metering systems attributed to a given Technical Assurance Agent.</p> <p><u>Metering System Registration Data</u></p> <p><u>Metering System Details</u></p> <p>Action Code Metering System Identifier BSC Party ID (registrant) Meter Operator Agent ID Effective From Date Effective To Date</p> <p>The first field of each record of the report is an Action Code, indicating whether the record has a) been added or changed; b) been deleted or c) not changed.</p>			
Physical Interface Details:			
A physical definition is included in the spreadsheet to define the format of the report which is printed out and passed to TAA.			

9.23 CRA-I030: (input) Data Exception Reports

This interface is defined in Section 4 as ECVAA-I016 and SAA-I017, and in Part 1 of the Interface Definition and Design as BMRA-I010.

9.24 CRA-I045: (input) Withdrawing Party Authorisation and Notification Details

See ECVAA-I047 in this section.

9.25 CRA-I046: (input) Withdrawing Party Settlement Details

9.26 See SAA-I037 in this section.ECVAA-I001 (input): Registration Data

See CRA-I013 and CRA-I015 in section 4, CRA-I017 in this section

9.27 ECVAA-I011: Account Bilateral Contract Volume Report

Interface ID:: From: ECVAA-I011 To: SAA-I008	User: SAA	Title: Account Bilateral Contract Volume Report	BSC Reference: ECVAA SD: 8.5, A RETA ERR: 6 ECVAA BPM: 3.3, 4.21 RETA SCH: 4, B, 3.1, CP527
Mechanism: Electronic data file transfer	Frequency: Daily and in support of disputes	Volumes:	
<p>Interface Requirement:</p> <p>The ECVAA Service shall issue an Account Bilateral Contract Volume Report to the SAA once a day. At the end of each Settlement Day, the ECVAA shall report Account Bilateral Contract Volumes for that Settlement Day to the SAA.</p> <p>The ECVAA Service shall issue a revised Account Bilateral Contract Volume Report to the SAA as required to support disputes.</p> <p>Note: Revision of ECVAA data in support of disputes will not cause credit cover tests to be retrospectively applied.</p>			
<p>The Account Bilateral Contract Volume Report shall include:</p> <ul style="list-style-type: none"> BSC Party ID Production/Consumption flag ECVAA Run Number Settlement Date Settlement Period (1-50) Account Bilateral Contract Volume (MWh) 			

9.28 ECVAA-I012: MVRN Report

Interface ID: From: ECVAA-I012 To: SAA-I008	User: SAA	Title: MVRN Report	BSC Reference: ECVAA SD: 9.2, 9.4, A RETA ERR: 2 ECVAA BPM: 3.3, 4.19 RETA SCH: 4, B, 3.1, CP527
Mechanism: Electronic data file transfer	Frequency: Daily and in support of disputes	Volumes: Medium	
<p>Interface Requirement:</p> <p>The ECVAA Service shall issue a Metered Volume Reallocation Notification Report (initial and revised) to the SAA once a day. At the end of each Settlement Day, the ECVAA shall report valid Metered Volume Reallocation Notifications for that Settlement Day to the SAA.</p> <p>The ECVAA Service shall issue a revised Metered Volume Reallocation Notification Report to the SAA as required to support disputes.</p> <p>Note: Revision of ECVAA data in support of disputes will not cause credit cover tests to be retrospectively applied.</p> <p>The Metered Volume Reallocation Notification Report shall comprise:</p> <ul style="list-style-type: none"> BM Unit ID ECVAA Run Number Settlement Date Settlement Period (1-50) Lead Party Production/Consumption flag Subsidiary Party ID Subsidiary Party Energy Account Production/Consumption flag Metered Volume Fixed Reallocation (MWh) Metered Volume Percentage Reallocation (%) 			

9.29 ECVAA-I016: (output, common) ECVAA Data Exception Report

This interface is defined in Section 4.

9.30 ECVAA-I020: (input) Data Exception Reports

This interface is defined in Part One as SAA-I017.

9.31 ECVAA-I036: (output) Publish Credit Default Report

Interface ID:: From: ECVAA-I036 To: BMRA-I018	User: BMRA	Title: Publish Credit Default Report	BSC Reference: CP703, Variation 45
Mechanism: Electronic Data File Transfer	Frequency: As required	Volumes: Low	
<p>Interface Requirement: The ECVAA Service shall issue a Publish Credit Default Report to the BMRA as described in requirement ECVAA-F007.</p> <p>The Publish Credit Default Report shall comprise:</p> <p>Credit Default Notice:</p> <p>BSC Party ID Credit Default Level Entered Default Settlement Day Entered Default Settlement Period Cleared Default Settlement Day Cleared Default Settlement Period Cleared Default Reason</p> <p>Notes: The Credit Default Level may be one of the following: Level 1 Default; Level 2 Default; The Entered Settlement Day and Entered Settlement Period indicate when the BSC Party entered the reported default level. The Cleared Settlement Day and Cleared Settlement Period indicate when the BSC Party cleared the reported default level. The Cleared Default Reason indicates why the Party cleared default and may include one of the following Credit Cover Percentage <= 75% of Credit Limit (Level 1 Default) Credit Cover Percentage <= 90% of Credit Limit (Level 2 Default) Authorisation Withdrawn by BSCCo Ltd (Discretionary). Authorisation Withdrawn by BSCCo Ltd (Trading Dispute Upheld) Party Withdrawn from BSC</p>			

9.32 ECVAA-I047: (output) Withdrawing Party Authorisation and Notification Details

Interface ID: ECVAA-I047	User: CRA	Title: Withdrawing Party Authorisation and Notification Details	BSC Reference: CP974
Mechanism: Manual, by email or fax	Frequency: On request	Volumes: Low	
Interface Requirement:			
<p>The ECVAA shall issue details of outstanding authorisations and notifications for a withdrawing participant, on request from the CRA.</p> <p>Report Date BSC Party / BSC Party Agent Name BSC Party / BSC Party Agent Id</p> <p><u>Authorisation and Notification Details</u> Indication of outstanding ECVNA / MVRNA authorisations for the party / agent¹ Date of last outstanding non-zero notifications for the party²</p> <ol style="list-style-type: none"> 1. This field is set to "Yes" if outstanding ECVNA / MVRNA authorisations are in place or "No" otherwise. An outstanding authorisation is one where the effective to date is null or equal to or greater than the report date. If outstanding authorisations are found the maximum effective to date is given. 2. The date of the last outstanding non-zero notification gives the last date for which there are outstanding non-zero ECVN / MVRN volumes relating to the party. For the avoidance of doubt, this check is done at the individual notification level (i.e. not after netting the notifications to give the overall contract position). Where the party has a notification in place with no effective to date, the date of the last outstanding non-zero notification is reported as "evergreen". 			
Physical Interface Details:			

9.33 ECVAA-I048 (input) Physical Notification Data

See BMRA-I007 in this section.

9.34 SAA-I013: (output) Credit/Debit

This interface is defined in Section 4.

9.35 SAA-I001 (input): Registration Data

See CRA-I013 and CRA-I015 in section 4.

9.36 SAA-I002 (input): Credit Assessment Capability

See CRA-I017 in this section

9.37 SAA-I003 (input) SAA Balancing Mechanism Data

See BMRA-I007 in this section.

9.38 SAA-I004: (input) Period Meter Data

See CDCA-I027, CDCA-I028 and CDCA-I036 in this section.

9.39 SAA-I008: MVRN Report

See ECVAA-I011 and ECVAA-I012 in this section.

9.40 SAA-I015

This interface is redundant.

9.41 SAA-I016: (output, part 1) Settlement Calendar

This interface is defined in Part 1 of the Interface Definition and Design.

9.42 SAA-I017: (output, common) SAA Data Exception Report

This interface is defined in Part 1 of the Interface Definition and Design.

9.43 SAA-I037: (output) Withdrawing Party Settlement Details

Interface ID: SAA-I037	User: CRA	Title: Withdrawing Party Settlement Details	BSC Reference: CP974
Mechanism: Manual, via shared database	Frequency: On request	Volumes: Low	
Interface Requirement:			
<p>The SAA shall issue settlement details for a withdrawing participant, on request from the CRA.</p> <p>Report Date BSC Party Name BSC Party Id</p> <p><u>Settlement Details</u> Date of last non-zero metered volumes held in SAA</p> <p>The date of the last metered volumes held in SAA is the last settlement date for which the party has non-zero metered volumes registered against its Interconnector, Supplier or CDCA metered BM Units.</p>			
Physical Interface Details:			

9.44 SAA-I043: (output) Demand Control Instructions to CDCA

Interface ID: SAA-I043	User: CDCA	Title: Demand Control Instructions to CDCA	BSC Reference: P305
Mechanism: Via shared database with CDCA	Frequency: As required	Volumes: Low	
Interface Requirement:			
<p>The SAA provides details of Demand Control Instructions to the CDCA as and when they are received from the System Operator via SAA-I003.</p> <p>The Demand Control Instruction data shall include:</p> <p style="padding-left: 40px;">Demand Control Event ID Start Date and Time End Date and Time</p>			
Physical Interface Details:			

9.45 SAA-I044: (input) Period BM Unit Demand Disconnection Volumes

See CDCA-I068 in this section.

DRAFT

9.46 CRA-I036: (output) Notification Agent Termination Request

Interface ID: From: CRA-I036 To: ECVAA-I030	User: ECVAA	Title: Notification Agent Termination Request	BSC Reference: CP503
Mechanism: Manual	Frequency: As required	Volumes: Low	
Interface Requirement:			
<p>The CRA Service shall issue Notification Agent Termination Requests to ECVAA when CRA is in the process of terminating an MVRNA or ECVNA role.</p> <p>The Notification Agent Termination Request shall comprise:</p> <p><u>Notification Agent Termination Request:</u></p> <p style="padding-left: 40px;">BSC Party Agent Id BSC Party Agent Role (MVRNA or ECVNA) Termination effective date</p>			
Physical Interface Details:			

9.47 ECVAA-I031: (output) Notification Agent Termination Feedback

Interface ID: From: ECVAA-I031 To: CRA-I037	User: CRA	Title: Notification Agent Termination Feedback	BSC Reference: CP503
Mechanism: Manual	Frequency: As required	Volumes: Low	
Interface Requirement:			
<p>The ECVAA Service shall issue a Notification Agent Termination Feedback to CRA in response to a Notification Agent Termination Request.</p> <p>The Notification Agent Termination Feedback shall comprise:</p> <p><u>Notification Agent Termination Feedback:</u></p> <p style="padding-left: 40px;">BSC Party Agent Id BSC Party Agent Role (MVRNA or ECVNA) Termination effective date Termination Status</p> <p>Notes:</p> <p>Termination status may indicate one of two situations:</p> <ol style="list-style-type: none"> 1. The notification agent has no outstanding notification authorisations beyond the termination effective date (and therefore CRA may terminate the role) 2. The notification agent has some outstanding notification authorisations beyond the termination effective date (and therefore CRA may not terminate the role) 			
Physical Interface Details:			

9.48 ECVAA-I033: (input) Credit/Debit Reports

See SAA-I013 in Section 4.

9.49 CDCA-I040: (output) BM Unit ‘Credit Cover’ Meter Volume Data Report

Interface ID: From: CDCA-I040 To: ECVAA-I015	User: ECVAA	Title: BM Unit ‘Credit Cover’ Meter Volume Data Report	BSC Reference: P215
Mechanism: Electronic Data File Transfer	Frequency: As required or daily	Volumes: Up to 5000 BM Units	
Interface Requirement:			
Credit Cover meter volume data for BM Units is sent to ECVAA, as follows for each BM Unit: BM Unit Identifier Settlement Date Settlement Period Meter Volume A Meter Volume value of NULL is used to represent where no value could be generated.			
Physical Interface Details:			

9.50 ECVAA-I015: (input) BM Unit ‘Credit Cover’ Meter Volume Data

See CDCA-I040 in section 9.

9.51 BMRA-I027: (input) Settlement Reports

This interface is defined in Section 5 and has the same format as the SAA-I014 Sub Flow 2 sent to the System Operator.

10 Interfaces From and To Transfer Coordinator

10.1 CRA-I023: Issue Registration Transfer Report

Interface ID: CRA-I023	User: Transfer Coordinator (BSCCo)	Title: Issue Registration Transfer Report	BSC Reference: CRA SD 11.2, CP753, CP1223
Mechanism: Manual	Frequency: On Change of Status	Volumes: Low	
Interface Requirement:			
On completion of entry of confirmed updates resulting from a transfer of metering system(s) to or from SMRA, the CRA shall issue a report to the Transfer Coordinator detailing the data entered.			
<u>Metering System registration details</u> Metering System Identifier Meter Operator Agent ID Effective from date Effective to date <u>BM Unit details</u> BM Unit ID Effective from date Effective to date <u>SVA metering system identifiers</u> SVA MSID (as supplied with CRA-I005)			
Physical Interface Details:			
The report is a copy of data held on the database for each item. Note that SVA MSIDs as specified in CRA-I005 are not entered on the database and so, where this is available, a copy of the original CRA-I005 flow as received will form part of this report.			

10.2 CRA-I038: Transfer from SMRS information

This interface is defined in Part 1 of the Interface Definition and Design.

10.3 CRA-I039: Transfer from SMRS report

Interface ID: CRA-I039	User: Transfer Coordinator	Title: Transfer from SMRS report	BSC Reference: CP753
Mechanism: Manual	Frequency: On Demand	Volumes: low	
Interface Requirement:			
<p>The following information is reported to the Transfer coordinator following receipt of new transfer from SMRS information</p> <ul style="list-style-type: none"> SVA registrant Import SVA MSID Export SVA MSID Import CVA MSID Export CVA MSID CVA MOA Site name BM Unit Id(s) <p>Whether the CVA registrant is registered as a party in CMRS. Whether the CVA Registrant has nominated a BM Unit Id to be registered in CMRS. Whether the Registration Effective From Date is operationally achievable. Whether the nominated BM Unit Id is ready for Registration in CMRS when the Registration Effective From Date is Confirmed by the Transfer Co-ordinator. Whether the MOA in the Metering Systems Registration is valid. Whether the transfer request is valid comments/reasons for being invalid</p> <p>Note: SVA data can only be reported where this has been provided by the registrant</p>			
Physical Interface Details:			

10.4 CRA-I040: Transfer to SMRS information

This interface is defined in Part 1 of the Interface Definition and Design.

10.5 CRA-I041: Transfer to SMRS report

Interface ID: CRA-I041	User: Transfer Coordinator	Title: Transfer to SMRS report	BSC Reference: CP753
Mechanism: Manual	Frequency: On Demand	Volumes: low	
Interface Requirement:			
<p>The following information is reported to the Transfer coordinator following receipt of new transfer to SMRS information</p> <ul style="list-style-type: none"> CVA registrant Import SVA MSID Export SVA MSID Import CVA MSID Export CVA MSID Site name BM Unit Id(s) <p>Whether the Metering System is registered in CRA Whether the BM Unit(s) are registered in CRA Whether the effective to date is possible Whether the BM Unit is ready for deregistration whether the BM Unit is part of a Trading Unit registered using CRA-F015 Whether the transfer request is valid comments/reasons for being invalid</p> <p>Note: SVA data can only be reported where this has been provided by the registrant</p>			
Physical Interface Details:			

10.6 CDCA-I055: (input)Transfer from SMRS information

This interface is defined in Part 1 of the Interface Definition and Design.

10.7 CDCA-I056: (output) Transfer from SMRS report

Interface ID: CDCA-I056	User: Transfer Coordinator	Title: Transfer from SMRS report	BSC Reference: CP753
Mechanism: Manual	Frequency: On Demand	Volumes: low	
Interface Requirement:			
<p>The following information is reported to the Transfer coordinator following receipt of new transfer from SMRS information</p> <ul style="list-style-type: none"> SVA registrant Import SVA MSID Export SVA MSID Import CVA MSID Export CVA MSID CVA MOA Site name BM Unit Id(s) <p>Whether aggregation rules have been registered for the BM Units Whether the BM Units and CVA Metering Systems are linked by the aggregation rules Whether the transfer request is valid comments/reasons for being invalid</p>			
Physical Interface Details:			

10.8 CDCA-I057: (input) Transfer to SMRS information

This interface is defined in Part 1 of the Interface Definition and Design.

10.9 CDCA-I058: (output) Transfer to SMRS report

Interface ID: CDCA-I058	User: Transfer Coordinator	Title: Transfer to SMRS report	BSC Reference: CP753
Mechanism: Manual	Frequency: On Demand	Volumes: low	
Interface Requirement:			
<p>The following information is reported to the Transfer coordinator following receipt of new transfer to SMRS information</p> <ul style="list-style-type: none"> CVA registrant Import SVA MSID Export SVA MSID Import CVA MSID Export CVA MSID Site name BM Unit Id(s) <p>Whether aggregation rules have been registered for the BM Units Whether the BM Units and CVA Metering Systems are linked by the aggregation rules Whether the transfer request is valid comments/reasons for being invalid</p>			
Physical Interface Details:			

11 Interfaces From and To EMR Settlement Services Provider

11.1 SAA-I042: (output) BM Unit Gross Demand Report

Interface ID: SAA-I042	User: CFD Settlement Services Provider	Title: BM Unit Gross Demand Report	BSC Reference: EMR
Mechanism: Electronic data file transfer, XML	Frequency: Daily	Volumes: One per Settlement Run	
<p>Interface Requirement:</p> <p>The SAA shall issue the BM Unit Gross Demand data to a CFD Settlement Services Provider for all Settlement Runs, The report shall include:</p> <p>Settlement Date Settlement Run Type BSC Party ID BM Unit ID Settlement Period TLM-Adjusted BM Unit Gross Demand</p> <p>For each Settlement Period, the report will contain data for the following BM Units:</p> <ul style="list-style-type: none"> Supplier BM Units, for which the TLM-Adjusted BM Unit Gross Demand is defined as: $\text{TLM-Adjusted BM Unit Gross Demand} = - \text{TLM}_{ij} * \text{BM Unit SVA Gross Demand}$ <p>where BM Unit SVA Gross Demand is calculated by SVAA, and will be deemed to be zero if a value has not been received from SVAA; and</p> BM Units other than Supplier BM Units and Interconnector BM Units, for which the TLM-Adjusted BM Unit Gross Demand is defined as: $\text{TLM-Adjusted BM Unit Gross Demand} = \text{TLM}_{ij} * \min(\text{BM Unit Metered Volume}, 0)$ 			
<p>Physical Interface Details:</p> <p>This file will be sent in a format defined by an XML Schema established and maintained by the SAA.</p>			